



- + STURDY**
- + ARTICULATED**
- + MINIMUM WIDTH 80 CM**
- + THE WORLD'S SMALLEST EQUAL-WHEEL TRACTOR**

The Goldoni equal-size wheels tractors present themselves renewed and compliant with the new TMR 2 norm (Tractor Mother Regulation). The combination of a tapered chassis, a reduced steering radius, 4 drive wheels and direct injection engines from 20 to 48 hp, make the E series the ideal machines for working between narrow rows in vineyards and low-hanging orchards with limited room to manoeuvre. The compact load-bearing structure of this model ensures the centre of gravity remains low and close to the centre of the machine, enabling optimal weight distribution for safe operation, even when using very heavy tools.

NOTES

PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | – not available

DESCRIPTION	VALUE
MODEL	
Type	● Equal wheels tractor
Structure	● Self supporting integral
Version	● Articulated (in the middle)
ENGINE	
Trademark	● Lombardini
Model	● 12LD477/2
Fuel supply	● Diesel
Rated power (ECE R120)	● 15 KW / 20,4 HP
Legislation on emission	● STEP 3A
Number of cylinders	● 2
Aspiration	● Aspirated
Nominal rate	● 3000 rpm
Cooling	● Air
Swept volume	● 954 cm3
Specific fuel consumption (maximum torque speed)	● 237 g/KWh
Max torque	● 54Nm@2300 rpm
Torque reserve	● 6%
Air filter	● Oil bath
Tank capacity	● 15 litres
Engine bonnet	● Sheet metal
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 6+3 plug-in easy connection
Gearbox control	● Mechanical with front lever
Clutch	● Dry single plate clutch, diameter 7,3"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on clutch pedal and Interlock on gear lever
Type reverser	– Mechanical, synchronized
Rear differential lock	● Mechanic
Front wheel drive coupling control	–
Front differential lock	● Mechanic
Front swinging	● 8° right + 8° left
Minimum speed	● 2,45 Km/h
Maximum speed (homologated)	● 19 Km/h
BRAKES	
Rear braking	● DRUM BRAKES, MECHANICALLY CONTROLLED
Front braking type	–
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
STEERING WHEEL	
Steering wheel system	● Hydrostatic
Swinging front axle	● 30°
REAR PTO	
Type	● Single shaft, synchronized and independent
Power	● 12,7 KW / 17,2 CV
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● 1 wheel revolution = 15,043 PTO revolution
Rotation way (looking at the pto)	● Clockwise (upper PTO) / Anticlockwise (lower PTO)
Version	● Ø 1-3/8"-6 splines (upper PTO shaft) / UNI 8953-6X26X30 (lower PTO shaft)

DESCRIPTION	VALUE
Clutch	● Mechanical with dry disc (same transmission plate clutch)
Clutch control	● Mechanic
Security	● Interlock on lever (synchronized/independent selection)
REAR LIFTER	
Type	● Lifts and lowers hydraulic
Lifting capacity at the rear arms	● 500 Kg
3-points hitch	● Category 1N
3rd point mechanical arm	● Category 1N
Type of lower arms	● Fixes
Right and left tie rods type	● Adjustable mechanical
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 11 litres per minute
Rear hydraulic scv	–
Free oil discharge	–
ELECTRICAL FITTINGS	
Battery	● 12V 360A 44Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
7 pins socket	● 12 Volt
Rear working light	–
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	–
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	–
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	
Rear tow hook	● Category CEE/CEE-X/CEE-Y adjustable
Front tow hook	● Fix
WEIGHTS	
Front	–
By tyre filled with water	– With air / water valve
Wheel	○ Weights for wheels kg.30X2 set of 2 (tot.60 kg.)
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1000 mm
Lenght (front bumper / rear lifting arms)	● 2500 mm
Width (min-max)	● 467 - 906 mm
Height with ROPS (min-max)	● 1719 - 1757 mm
Height at steering wheel (min-max)	● 1023 mm
Height at seat (min-max)	● 785 mm
Connection angle	● 24°
Ground clearance (min-max)	● 237 mm
Distance between insides of tyres	● 104 - 543 mm
Minimum turning radius (internal)	● 1,25 m
Front track (min-max)	● 314 - 682 mm
Rear track (min-max)	● 328 - 696 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



E20 SN

Equal-wheel tractors

PRICE LIST

DESCRIPTION	VALUE
Weight with roll-bar	● 750 Kg
Maximum laden mass	● 2800 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear and Front 6.00X16	Minimum width 815 mm; Height ● 1757 mm; Ground clearance 237 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



E20 SN

Equal-wheel tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01130041- 1	E20 SN	€ 13,548
Wheels			
	01800829- 1	Set of wheels Rear and Front 6.00X16	€ 950
Towing devices			
	01730349- 1	Rear tow hook category CEE-X D.28	€ 191
	01730350- 1	Rear tow hook category CEE D.31	€ 222
Electrical fittings			
	01900127- 1	Rotating lamp for roll bar	€ 74
Documentation language			
	01700468- 1	Documentation - Italian version	€ 0
	01700469- 1	Documentation - English version	€ 0
	01700470- 1	Documentation - French version	€ 0
	01700471- 1	Documentation - German version	€ 0
	01700472- 1	Documentation - Slovenian version	€ 0
	01700473- 1	Documentation - Croatian version	€ 0
	01700474- 1	Documentation - Polish version	€ 0
	01700475- 1	Documentation - Portuguese version	€ 0
	01700476- 1	Documentation - Spanish version	€ 0

OPTIONAL

Weights			
	01800550- 1	Weights for wheels kg.30X2 set of 2 (tot.60 kg.)	€ 350
Accessories			
	01800566- 1	Wheel spacers 60mm. set of 4 • Required for track widening	€ 329

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- +** STEERING
- +** LOWERED, SPACIOUS AND ERGONOMIC COCKPIT

The Goldoni equal-size wheels tractors present themselves renewed and compliant with the new TMR 2 norm (Tractor Mother Regulation). The combination of a tapered chassis, a reduced steering radius, 4 drive wheels and direct injection engines from 20 to 48 hp, make the E series the ideal machines for working between narrow rows in vineyards and low-hanging orchards with limited room to manoeuvre. The compact load-bearing structure of this model ensures the centre of gravity remains low and close to the centre of the machine, enabling optimal weight distribution for safe operation, even when using very heavy tools.

NOTES

PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | - not available

DESCRIPTION	VALUE
MODEL	
Type	● Equal wheels tractor
Structure	● Self supporting integral
Version	● Steering wheels
ENGINE	
Trademark	● Lombardini
Model	● 9LD626/2 B2 NR
Fuel supply	● Diesel
Rated power (ECE R120)	● 18,2 KW / 24,7 CV
Legislation on emission	● STEP 3A
Number of cylinders	● 2
Aspiration	● Aspirated
Nominal rate	● 2800 rpm
Cooling	● Air
Swept volume	● 1248 cm3
Specific fuel consumption (maximum torque speed)	● 220 g/kWh
Max torque	● 67Nm@2000rpm
Torque reserve	● 7.4 %
Air filter	● Dry
Tank capacity	● 24 litres
Engine bonnet	● Sheet metal
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 6+3 plug-in easy connection
Gearbox control	● Mechanical with front lever
Clutch	● Single dry plate clutch
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on clutch pedal and Interlock on gear lever
Type reverser	● Mechanical, synchronized
Rear differential lock	● Mechanic
Front wheel drive coupling control	● Mechanic
Front differential lock	● Mechanic
Front swinging	● 8° right + 8° left
Minimum speed	● 1,2 Km/h
Maximum speed (homologated)	● 30 Km/h
BRAKES	
Rear braking	● DRUM BRAKES, MECHANICALLY CONTROLLED
Front braking type	-
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
STEERING WHEEL	
Steering wheel system	● Hydrostatic
Steering angle	● 34°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Mechanical with dry disc (same transmission plate clutch)
Clutch control	● Mechanic
Security	● PUSH & START device on PTO selector
REAR LIFTER	

DESCRIPTION	VALUE
Type	● Up-down, floating
Lifting capacity at the rear arms	● 1000 Kg
3-points hitch	● Category 1N
3rd point mechanical arm	● Category 1N
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 17.6 litres/minute
First rear hydraulic scv	○ Double acting
Rear hydraulic scv	-
Free oil discharge	-
ELECTRICAL FITTINGS	
Battery	● 12V 360A 44Ah
Security	● Battery disconnection
Instrument	● Analog
7 pins socket	● 12 Volt
Rear working light	-
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	-
Front mudguard	● Independent, swivelling, rubber made
Rear mudguard protection	-
Front mudguard protection	-
Roll-bar	● Central, all-tilting
Standard cab	-
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	
Rear tow hook	● Category B / CEE
Front tow hook	● Fix
WEIGHTS	
Front	-
By tyre filled with water	● With air / water valve
Wheel	● Weights for wheels kg.30X2 set of 2 (tot.60 kg.)
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1155 mm
Lenght (front bumper / rear lifting arms)	● 2885 mm
Width (min-max)	● 1103 - 1203 mm
Height with ROPS (min-max)	● 1936 - 1959 mm
Height at steering wheel (min-max)	● 1092 - 1186 mm
Height at seat (min-max)	● 629 - 708 mm
Connection angle	● 24°
Ground clearance (min-max)	● 233 - 272 mm
Distance between insides of tyres	● 691 - 767 mm
Front track (min-max)	● 933-947 mm
Rear track (min-max)	● 933-947 mm
Weight with roll-bar	● 1130 Kg
Maximum laden mass	● 1680 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear and Front 7.50X16	● Minimum width 1101 mm; Height 1959 mm; Ground clearance 272 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



E30 RS

Equal-wheel tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---


VERSIONS

Trims			
	01150294- 1	E30 RS	€ 17,768
Wheels			
	01800831- 1	Set of wheels Rear and Front 7.50X16	€ 1,167
	01800686- 1	Set of wheels Rear and Front 260/70R16	€ 1,751
Towing devices			
	01730357- 1	Rear tow hook category CEE-X D.28	€ 138
	01730358- 1	Rear tow hook category CEE D.31	€ 271
Electrical fittings			
	01900125- 1	Rotating lamp for roll bar	€ 74
Documentation language			
	01700453- 1	Documentation - Italian version	€ 0
	01700454- 1	Documentation - English version	€ 0
	01700455- 1	Documentation - French version	€ 0
	01700456- 1	Documentation - German version	€ 0
	01700457- 1	Documentation - Slovenian version	€ 0
	01700458- 1	Documentation - Croatian version	€ 0
	01700459- 1	Documentation - Polish version	€ 0
	01700466- 1	Documentation - Portuguese version	€ 0
	01700467- 1	Documentation - Spanish version	€ 0

OPTIONAL

Rear hydraulic scv			
	01640379- 1	Double acting rear scv	€ 409
Weights			
	01800550- 1	Weights for wheels kg.30X2 set of 2 (tot.60 kg.)	€ 350

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

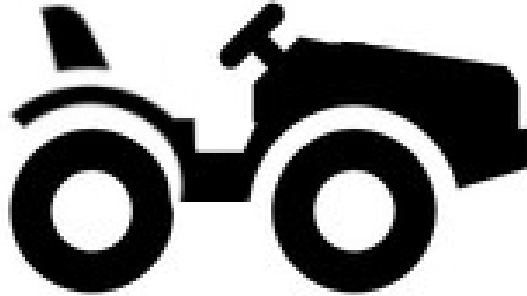

- +** STEERING
- +** LOWERED, SPACIOUS AND ERGONOMIC COCKPIT

The Goldoni equal-size wheels tractors present themselves renewed and compliant with the new TMR 2 norm (Tractor Mother Regulation). The combination of a tapered chassis, a reduced steering radius, 4 drive wheels and direct injection engines from 20 to 48 hp, make the E series the ideal machines for working between narrow rows in vineyards and low-hanging orchards with limited room to manoeuvre. The compact load-bearing structure of this model ensures the centre of gravity remains low and close to the centre of the machine, enabling optimal weight distribution for safe operation, even when using very heavy tools.

NOTES



PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | – not available

DESCRIPTION	VALUE
MODEL	
Type	● Equal wheels tractor
Structure	● Self supporting integral
Version	● Steering wheels
ENGINE	
Trademark	● Lombardini
Model	● LDW 1503
Fuel supply	● Diesel
Rated power (ECE R120)	● 24 KW / 33 HP
Legislation on emission	● STEP 3A
Number of cylinders	● 3
Aspiration	● Aspirated
Nominal rate	● 2800 rpm
Cooling	● On liquid
Swept volume	● 1649 cm3
Specific fuel consumption (maximum torque speed)	● 265 g/kWh
Max torque	● 94Nm@2000rpm
Torque reserve	● 14,2 %
Air filter	● Dry
Tank capacity	● 30 litres
Engine bonnet	● RTM
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 6+3 plug-in easy connection
Gearbox control	● Mechanical with front lever
Clutch	● Single dry plate clutch
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on clutch pedal and Interlock on gear lever
Type reverser	● Mechanical, synchronized
Rear differential lock	● Mechanic
Front wheel drive coupling control	● Mechanic
Front differential lock	● Mechanic
Front swinging	● 8° right + 8° left
Minimum speed	● 1,2 Km/h
Maximum speed (homologated)	● 30 Km/h
BRAKES	
Rear braking	● DRUM BRAKES, MECHANICALLY CONTROLLED
Front braking type	–
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
STEERING WHEEL	
Steering wheel system	● Hydrostatic
Steering angle	● 34°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Mechanical with dry disc (same transmission plate clutch)
Clutch control	● Mechanic
Security	● PUSH & START device on clutch pedal and PTO
REAR LIFTER	

DESCRIPTION	VALUE
Type	● Up-down, floating
Lifting capacity at the rear arms	● 1000 Kg
3-points hitch	● Category 1N
3rd point mechanical arm	● Category 1N
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 22 lt/min
First rear hydraulic scv	○ Double acting
Rear hydraulic scv	–
Free oil discharge	–
ELECTRICAL FITTINGS	
Battery	● 12V 360A 44Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
7 pins socket	● 12 Volt
Rear working light	–
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	–
Front mudguard	● Independent, swivelling, rubber made
Rear mudguard protection	–
Front mudguard protection	–
Roll-bar	● Central, all-tilting
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	
Rear tow hook	● Category B / CEE
Front tow hook	● Fix
WEIGHTS	
Front	–
By tyre filled with water	● With air / water valve
Wheel	● Weights for wheels kg.30X2 set of 2 (tot.60 kg.)
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1155 mm
Lenght (front bumper / rear lifting arms)	● 3026 mm
Width (min-max)	● 1103 - 1203 mm
Height with ROPS (min-max)	● 1936 - 1959 mm
Height at steering wheel (min-max)	● 1092 - 1186 mm
Height at seat (min-max)	● 629 - 708 mm
Connection angle	● 24°
Ground clearance (min-max)	● 233 - 272 mm
Distance between insides of tyres	● 691 - 767 mm
Weight with roll-bar	● 1130 Kg
Maximum towable weight (without braking), with roll bar	● 1280 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 3500 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear and Front 7.50X16	● Minimum width 1101 mm; Height 1959 mm; Ground clearance 272 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



E40 RS

Equal-wheel tractors

PRICE LIST

DESCRIPTION	VALUE
Set of wheels Rear and Front 260/70R16	Minimum width 1194 mm; ● Height 1936 mm; Ground clearance 249 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



E40 RS

Equal-wheel tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---


VERSIONS

Trims			
	01150295- 1	E40 RS	€ 19,982
Wheels			
	01800831- 1	Set of wheels Rear and Front 7.50X16	€ 1,167
	01800686- 1	Set of wheels Rear and Front 260/70R16	€ 1,751
Towing devices			
	01730357- 1	Rear tow hook category CEE-X D.28	€ 138
	01730358- 1	Rear tow hook category CEE D.31	€ 271
Electrical fittings			
	01900125- 1	Rotating lamp for roll bar	€ 74
Documentation language			
	01700453- 1	Documentation - Italian version	€ 0
	01700454- 1	Documentation - English version	€ 0
	01700455- 1	Documentation - French version	€ 0
	01700456- 1	Documentation - German version	€ 0
	01700457- 1	Documentation - Slovenian version	€ 0
	01700458- 1	Documentation - Croatian version	€ 0
	01700459- 1	Documentation - Polish version	€ 0
	01700466- 1	Documentation - Portuguese version	€ 0
	01700467- 1	Documentation - Spanish version	€ 0

OPTIONAL

Rear hydraulic scv			
	01640379- 1	Double acting rear scv	€ 409
Weights			
	01800550- 1	Weights for wheels kg.30X2 set of 2 (tot.60 kg.)	€ 350

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

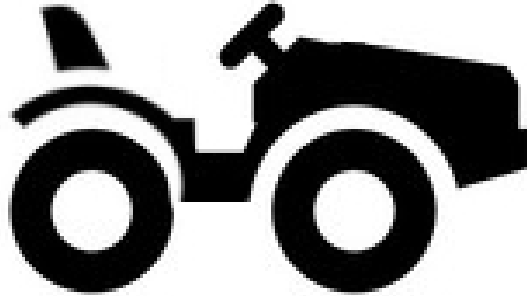

- + **STEERING**
- + **LOWERED, SPACIOUS AND ERGONOMIC COCKPIT**

The Goldoni equal-size wheels tractors present themselves renewed and compliant with the new TMR 2 norm (Tractor Mother Regulation). The combination of a tapered chassis, a reduced steering radius, 4 drive wheels and direct injection engines from 20 to 48 hp, make the E series the ideal machines for working between narrow rows in vineyards and low-hanging orchards with limited room to manoeuvre. The compact load-bearing structure of this model ensures the centre of gravity remains low and close to the centre of the machine, enabling optimal weight distribution for safe operation, even when using very heavy tools.

NOTES

PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | – not available

DESCRIPTION	VALUE
MODEL	
Type	● Equal wheels tractor
Structure	● Self supporting integral
Version	● Steering wheels
ENGINE	
Trademark	● Lombardini
Model	● LDW 1603
Fuel supply	● Diesel
Rated power (ECE R120)	● 28 KW / 38 hp
Legislation on emission	● STEP 3A
Number of cylinders	● 3
Aspiration	● Aspirated
Nominal rate	● 2800 rpm
Cooling	● On liquid
Swept volume	● 1649 cm3
Specific fuel consumption (maximum torque speed)	● 250 g/KWh
Max torque	● 113 Nm @ 1650 rpm
Torque reserve	● 8,9 %
Air filter	● Dry
Tank capacity	● 30 litres
Engine bonnet	● RTM
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 6+3 plug-in easy connection
Gearbox control	● Mechanical with front lever
Clutch	● Single dry plate clutch
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on clutch pedal and Interlock on gear lever
Type reverser	– Mechanical, synchronized
Rear differential lock	● Mechanic
Front wheel drive coupling control	● Mechanic
Front differential lock	● Mechanic
Front swinging	● 8° right + 8° left
Minimum speed	● 1,2 Km/h
Maximum speed (homologated)	● 30 Km/h
BRAKES	
Rear braking	● DRUM BRAKES, MECHANICALLY CONTROLLED
Front braking type	–
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
STEERING WHEEL	
Steering wheel system	● Hydrostatic
Steering angle	● 34°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Mechanical with dry disc (same transmission plate clutch)
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on clutch pedal and PTO

DESCRIPTION	VALUE
REAR LIFTER	
Type	● Up-down, floating
Lifting capacity at the rear arms	● 1200 Kg
3-points hitch	● Category 1N
3rd point mechanical arm	● Category 1N
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 22 l/min
First rear hydraulic scv	○ Double acting
Rear hydraulic scv	–
Free oil discharge	–
ELECTRICAL FITTINGS	
Battery	● 12V 360A 44Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
7 pins socket	● 12 Volt
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	–
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	
Rear tow hook	● Category B / CEE
Front tow hook	● Fix
WEIGHTS	
By tyre filled with water	● With air / water valve
Wheel	● Weights for wheels kg.30X2 set of 2 (tot.60 kg.)
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1155 mm
Lenght (front bumper / rear lifting arms)	● 3026 mm
Width (min-max)	● 1222 - 1396 mm
Height with ROPS (min-max)	● 2985 - 2073 mm
Height at steering wheel (min-max)	● 1149 mm
Height at seat (min-max)	● 645 - 849 mm
Connection angle	● 24°
Ground clearance (min-max)	● 290 mm
Distance between insides of tyres	● 798 - 972 mm
Weight with roll-bar	● 1350 Kg
Maximum laden mass	● 2100 Kg
Maximum towable weight (without braking), with roll bar	● 1280 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 3350 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear 8.25x16 Front 8.25x16	Minimum width 1222 mm; ● Height 2026 mm; Ground clearance 290 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



E50 RS

Equal-wheel tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---


VERSIONS

Trims			
	01150296- 1	E50 RS	€ 21,733
Wheels			
	01800684- 1	Set of wheels Rear and Front 8.25X16	€ 1,379
	01800685- 1	Set of wheels Rear and Front 260/70R16	€ 1,942
Towing devices			
	01730357- 1	Rear tow hook category CEE-X D.28	€ 138
	01730358- 1	Rear tow hook category CEE D.31	€ 271
Electrical fittings			
	01900125- 1	Rotating lamp for roll bar	€ 74
Documentation language			
	01700453- 1	Documentation - Italian version	€ 0
	01700454- 1	Documentation - English version	€ 0
	01700455- 1	Documentation - French version	€ 0
	01700456- 1	Documentation - German version	€ 0
	01700457- 1	Documentation - Slovenian version	€ 0
	01700458- 1	Documentation - Croatian version	€ 0
	01700459- 1	Documentation - Polish version	€ 0
	01700466- 1	Documentation - Portuguese version	€ 0
	01700467- 1	Documentation - Spanish version	€ 0

OPTIONAL

Rear hydraulic scv			
	01640380- 1	Double acting rear scv	€ 409

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

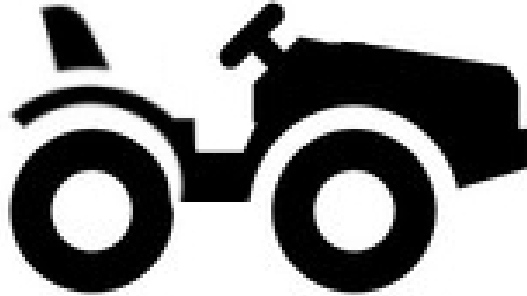

- ⊕ **ARTICULATED**
- ⊕ **LOWERED, SPACIOUS AND ERGONOMIC COCKPIT**

The Goldoni equal-size wheels tractors present themselves renewed and compliant with the new TMR 2 norm (Tractor Mother Regulation). The combination of a tapered chassis, a reduced steering radius, 4 drive wheels and direct injection engines from 20 to 48 hp, make the E series the ideal machines for working between narrow rows in vineyards and low-hanging orchards with limited room to manoeuvre. The compact load-bearing structure of this model ensures the centre of gravity remains low and close to the centre of the machine, enabling optimal weight distribution for safe operation, even when using very heavy tools.

NOTES

PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | – not available

DESCRIPTION	VALUE
MODEL	
Type	● Equal wheels tractor
Structure	● Self supporting integral
Version	● Articulated (in the middle)
ENGINE	
Trademark	● Lombardini
Model	● LDW 1603
Fuel supply	● Diesel
Rated power (ECE R120)	● 28 KW / 38 hp
Legislation on emission	● STEP 3A
Number of cylinders	● 3
Aspiration	● Aspirated
Nominal rate	● 2800 rpm
Cooling	● On liquid
Swept volume	● 1649 cm3
Specific fuel consumption (maximum torque speed)	● 250 g/KWh
Max torque	● 113 Nm @ 1650 rpm
Torque reserve	● 8,2 %
Air filter	● Dry
Tank capacity	● 30 litres
Engine bonnet	● RTM
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 6+3 plug-in easy connection
Gearbox control	● Mechanical with front lever
Clutch	● Single dry plate clutch
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on clutch pedal and Interlock on gear lever
Type reverser	– Mechanical, synchronized
Rear differential lock	● Hydraulic
Front wheel drive coupling control	● Mechanic
Front differential lock	● Hydraulic
Front swinging	● 8° right + 8° left
Minimum speed	● 1,2 Km/h
Maximum speed (homologated)	● 30 Km/h
BRAKES	
Rear braking	● Drum brakes, with hydraulic control
Front braking type	–
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
STEERING WHEEL	
Steering wheel system	● Hydrostatic
Swinging front axle	● 30°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Mechanical with dry disc (same transmission plate clutch)
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on clutch pedal and PTO
REAR LIFTER	

DESCRIPTION	VALUE
Type	● Up-down, floating
Lifting capacity at the rear arms	● 1200 Kg
3-points hitch	● Category 1N
3rd point mechanical arm	● Category 1N
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 22 l/min
First rear hydraulic scv	○ Double acting
Rear hydraulic scv	–
Free oil discharge	–
ELECTRICAL FITTINGS	
Battery	● 12V 360A 44Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
7 pins socket	● 12 Volt
Rear working light	–
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	–
Front mudguard	● Body integrated
Rear mudguard protection	–
Front mudguard protection	–
Roll-bar	● Central, all-tilting
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	
Rear tow hook	● Category B / CEE
Front tow hook	● Fix
WEIGHTS	
By tyre filled with water	● With air / water valve
Wheel	● Weights for wheels kg.30X2 set of 2 (tot.60 kg.)
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1294 mm
Lenght (front bumper / rear lifting arms)	● 2920 mm
Width (min-max)	● 855 - 1306 mm
Height with ROPS (min-max)	● 2009 - 2056 mm
Height at steering wheel (min-max)	● 1113 - 1163 mm
Height at seat (min-max)	● 921 mm
Connection angle	● 24°
Ground clearance (min-max)	● 301 mm
Distance between insides of tyres	● 729 - 877 mm
Front track (min-max)	● 643 - 1089 mm
Rear track (min-max)	● 643 - 1089 mm
Weight with roll-bar	● 1360 Kg
Maximum laden mass	● 2800 Kg
Maximum towable weight (without braking), with roll bar	● 1130 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 3350 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear 8.25x16 Front 8.25x16	Minimum width 1000 mm; ● Height 2050 mm; Ground clearance 301 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



E50 SN

Equal-wheel tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01150293- 1	E50 SN	€ 20,189
Wheels			
	01800690- 1	Set of wheels Rear and Front 8.25X16	€ 1,613
Towing devices			
	01730357- 1	Rear tow hook category CEE-X D.28	€ 138
	01730358- 1	Rear tow hook category CEE D.31	€ 271
Electrical fittings			
	01900125- 1	Rotating lamp for roll bar	€ 74
Documentation language			
	01700453- 1	Documentation - Italian version	€ 0
	01700454- 1	Documentation - English version	€ 0
	01700455- 1	Documentation - French version	€ 0
	01700456- 1	Documentation - German version	€ 0
	01700457- 1	Documentation - Slovenian version	€ 0
	01700458- 1	Documentation - Croatian version	€ 0
	01700459- 1	Documentation - Polish version	€ 0
	01700466- 1	Documentation - Portuguese version	€ 0
	01700467- 1	Documentation - Spanish version	€ 0

OPTIONAL

Rear hydraulic scv			
	01640378- 1	Double acting rear scv	€ 409
Weights			
	01800543- 1 01800673- 1	Weights for wheels kg.30X2 set of 2 (tot.60 kg.)	€ 498

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- ⊕ **SHORT WEELBASE**
- ⊕ **MAXIMUM WHEEL GRIP**
- ⊕ **16+16 GEARBOX WITH SYNCHRONIZED REVERSE SHUTTLE**
- ⊕ **1650 KG**

The Goldoni equal-size wheels tractors present themselves renewed and compliant with the new TMR 2 norm (Tractor Mother Regulation). The combination of a tapered chassis, a reduced steering radius, 4 drive wheels and direct injection engines from 20 to 48 hp, make the E series the ideal machines for working between narrow rows in vineyards and low-hanging orchards with limited room to manoeuvre. The compact load-bearing structure of this model ensures the centre of gravity remains low and close to the centre of the machine, enabling optimal weight distribution for safe operation, even when using very heavy tools.

NOTES



PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | - not available

DESCRIPTION	VALUE
MODEL	
Type	● Equal wheels tractor
Structure	● Self supporting integral
Version	● Steering wheels
ENGINE	
Trademark	● VM
Model	● D703 E3
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 35,3KW / 48hp
Legislation on emission	● STEP 3A
Number of cylinders	● 3
Aspiration	● Aspirated
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 2082 cm3
Specific fuel consumption (maximum torque speed)	● .
Max torque	● 145Nm@1600rpm
Torque reserve	● 8,8%
Tank capacity	● 30 litres
Engine bonnet	● RTM
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 16+16 synchronized
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Hydraulic
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanical, synchronized with NO-SPIN Interlock
Reverse control	● Lever
Rear differential lock	● Mechanic
Front wheel drive coupling control	-
Front differential lock	● Mechanic
Front swinging	● 15° right side + 15° left side
Minimum speed	● 0,9 Km/h
Maximum speed (homologated)	● 30 Km/h
BRAKES	
Rear braking	● Multiplates bath oil, mechanical control
Front braking type	-
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	-
Trailer brake mechanical lever support	● CUNA type
STEERING WHEEL	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 34°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
More speeds independent from gearbox	-
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Hydraulic control, multiplates bath-oil

DESCRIPTION	VALUE
Clutch control	● Electro-hydraulic
Security	● PUSH & START device on PTO selector
FRONT PTO	
Type	-
REAR LIFTER	
Type	● Lifts and lowers hydraulic
Lifting capacity at the rear arms	● 1500 Kg
3-points hitch	● Category 1
3rd point mechanical arm	● Category 1
Hydraulic 3rd point arm	-
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
FRONT LIFTER	
Type	-
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 38 litres/minute
First rear hydraulic scv	● Double acting
Second rear hydraulic scv	● Double acting
Third rear hydraulic scv	-
Front hydraulic scv	-
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 680A 74Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	● Integral platform
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Folding Roll Bar
Standard cab	-
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	
Rear tow hook	○ C/CEE Category 7 heights adjustable
Front tow hook	● Fix
WEIGHTS	
Front	-
By tyre filled with water	● With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1372 mm
Lenght (front bumper / rear lifting arms)	● 3312 mm
Width (min-max)	● 1422 - 1518 mm
Height with ROPS (min-max)	● 2130 - 2210 mm
Height on grille bonnet (min-max)	● 993 - 1001 mm
Height at steering wheel (min-max)	● 1200 - 1260 mm
Height at seat (min-max)	● 885 - 893 mm
Height at rear mudguard (min-max)	● 996 - 1004 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

DESCRIPTION	VALUE
Ground clearance (min-max)	● 230 - 290 mm
Distance between insides of tyres	● 804 - 956 mm
Minimum turning radius (internal)	● 3,5 m
Weight with roll-bar	● 1680 Kg
Maximum laden mass	● 2800 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear 8.25x16 Front 8.25x16	Minimum width 1241 mm; ○ Height 2099 mm; Ground clearance 383 mm
Set of wheels Rear 280/70R18 Front 280/70R18	Minimum width 1422 mm; ○ Height 2107 mm; Ground clearance 291 mm



E60 RS

Equal-wheel tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01100228- 1	E60 RS	€ 27,413
Wheels			
	01800737- 1	Set of wheels Rear and Front 8.25X16	€ 1,613
	01800803- 1	Set of wheels Rear and Front 280/70R18	€ 2,122
	01800890- 1	Set of wheels Rear 250/80R18 Front 250/80R18	€ 2,440
Towing devices			
	01730345- 1	Rear tow hook category CEE-X D.28	€ 191
	01730346- 1	Rear tow hook category CEE D.31	€ 222
Lifters			
	01640845- 1	Pair of rear arms 1 category	€ 207
Electrical fittings			
	01900125- 1	Rotating lamp for roll bar	€ 74
Documentation language			
	01700519- 1	Documentation - Italian version	€ 0
	01700520- 1	Documentation - English version	€ 0
	01700521- 1	Documentation - French version	€ 0
	01700522- 1	Documentation - German version	€ 0
	01700523- 1	Documentation - Spanish version	€ 0
	01700524- 1	Documentation - Portuguese version	€ 0
	01700525- 1	Documentation - Slovenian version	€ 0
	01700526- 1	Documentation - Croatian version	€ 0

OPTIONAL

Electrical fittings			
	01900092- 1	Rear working light <ul style="list-style-type: none">Adjustable	€ 106

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- + SHORT WEELBASE**
- + MAXIMUM WHEEL GRIP**
- + 1650 KG**

The Goldoni equal-size wheels tractors present themselves renewed and compliant with the new TMR 2 norm (Tractor Mother Regulation). The combination of a tapered chassis, a reduced steering radius, 4 drive wheels and direct injection engines from 20 to 48 hp, make the E series the ideal machines for working between narrow rows in vineyards and low-hanging orchards with limited room to manoeuvre. The compact load-bearing structure of this model ensures the centre of gravity remains low and close to the centre of the machine, enabling optimal weight distribution for safe operation, even when using very heavy tools.

NOTES

- The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | – not available

DESCRIPTION	VALUE
MODEL	
Type	● Equal wheels tractor
Structure	● Self supporting integral
Version	● Articulated (in the middle)
ENGINE	
Trademark	● VM
Model	● D703 E3
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 35,3KW / 48hp
Legislation on emission	● STEP 3A
Number of cylinders	● 3
Aspiration	● Aspirated
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 2082 cm3
Specific fuel consumption (maximum torque speed)	● .
Max torque	● 145Nm@1600rpm
Torque reserve	● 8,8%
Tank capacity	● 30 litres
Engine bonnet	● RTM
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 12+4 synchronized
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Hydraulic
Security	● PUSH & START device on clutch pedal and Interlock on gear lever
Rear differential lock	● Mechanic
Front wheel drive coupling control	–
Front differential lock	● Mechanic
Front swinging	● 15° right side + 15° left side
Minimum speed	● 1,2 Km/h
Maximum speed (homologated)	● 30 Km/h
BRAKES	
Rear braking	● Multiplates bath oil, mechanical control
Front braking type	–
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	–
Trailer brake mechanical lever support	● CUNA type
STEERING WHEEL	
Steering wheel system	● Hydrostatic with Load Sensing valve
Swinging front axle	● 45°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
More speeds independent from gearbox	–
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Hydraulic control, multiplates bath-oil
Clutch control	● Electro-hydraulic

DESCRIPTION	VALUE
Security	● PUSH & START device on PTO selector
FRONT PTO	
Type	–
REAR LIFTER	
Type	● Lifts and lowers hydraulic
Lifting capacity at the rear arms	● 1500 Kg
3-points hitch	● Category 1
3rd point mechanical arm	● Category 1
Hydraulic 3rd point arm	–
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
FRONT LIFTER	
Type	–
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 38 litres/minute
First rear hydraulic scv	● Double acting
Second rear hydraulic scv	● Double acting
Third rear hydraulic scv	–
Front hydraulic scv	–
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 680A 74Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	● Integral platform
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Folding Roll Bar
Standard cab	–
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	
Rear tow hook	○ C/CEE Category 7 heights adjustable
Front tow hook	● Fix
WEIGHTS	
Front	–
By tyre filled with water	● With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1372 mm
Lenght (front bumper / rear lifting arms)	● 3312 mm
Width (min-max)	● 1194 - 378 mm
Height with ROPS (min-max)	● 2160 - 2240 mm
Height on grille bonnet (min-max)	● 993 - 1048 mm
Height at steering wheel (min-max)	● 1200 - 1307 mm
Height at seat (min-max)	● 885 - 940 mm
Height at rear mudguard (min-max)	● 996 - 1051 mm
Ground clearance (min-max)	● 250 - 320 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

DESCRIPTION	VALUE
Distance between insides of tyres	● 629 - 823 mm
Minimum turning radius (internal)	● 2,38 m
Weight with roll-bar	● 1680 Kg
Maximum laden mass	● 2800 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear 8.25x16 Front 8.25x16	Minimum width 1101 mm; ○ Height 2099 mm; Ground clearance 283 mm
Set of wheels Rear 280/70R18 Front 280/70R18	Minimum width 1194 mm; ○ Height 2107 mm; Ground clearance 291 mm
Set of wheels Rear 300/70R20 Front 300/70R20	Minimum width 1219 mm; ○ Height 2154 mm; Ground clearance 338 mm



E60 SN

Equal-wheel tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01100229- 1	E60 SN	€ 26,687
Wheels			
	01800738- 1	Set of wheels Rear and Front 8.25X16	€ 1,613
	01800802- 1	Set of wheels Rear and Front 280/70R18	€ 2,122
	01800903- 1	Rear and Front Wheel Set 280/70R20	€ 2,324
Towing devices			
	01730345- 1	Rear tow hook category CEE-X D.28	€ 191
	01730346- 1	Rear tow hook category CEE D.31	€ 222
Lifters			
	01640845- 1	Pair of rear arms 1 category	€ 207
Electrical fittings			
	01900125- 1	Rotating lamp for roll bar	€ 74
Documentation language			
	01700519- 1	Documentation - Italian version	€ 0
	01700520- 1	Documentation - English version	€ 0
	01700521- 1	Documentation - French version	€ 0
	01700522- 1	Documentation - German version	€ 0
	01700523- 1	Documentation - Spanish version	€ 0
	01700524- 1	Documentation - Portuguese version	€ 0
	01700525- 1	Documentation - Slovenian version	€ 0
	01700526- 1	Documentation - Croatian version	€ 0

OPTIONAL

Electrical fittings			
	01900092- 1	Rear working light <ul style="list-style-type: none">Adjustable	€ 106

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- + STAGE 3B**
- + 3-4 CYLINDERS, UP TO 92,5 HP**
- + MAXIMUM WHEEL GRIP**
- + 16+16 GEARBOX WITH SYNCHRONIZED REVERSE SHUTTLE**

Firmly planted on their 4 drive-wheels, large, short and all equal size, E isodiametric tractors represent the perfect answer to work safely even in the most difficult situations, also thanks to their brand new tapered bodywork and their extremely reduced steering radius. Now, also available with 4 cylinders up to 92 HP.

NOTES



PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | – not available

DESCRIPTION	VALUE
MODEL	
Type	● Equal wheels tractor
Structure	● Self supporting integral
Version	● Steering wheels
ENGINE	
Trademark	● VM
Model	● R753 IE 4
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 52,2 KW/71 HP
Legislation on emission	● STAGE 3B
Number of cylinders	● 3
Aspiration	● Intercooler turbocharged
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 2199 cm3
Specific fuel consumption (maximum torque speed)	● 242 g/KWh
Max torque	● 246Nm@1800rpm
Torque reserve	● 28%
Tank capacity	● 70 liters
Engine bonnet	● RTM
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 16+16 synchronized
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Hydraulic
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Electro-hydraulic
Front wheel drive coupling control	● 4WD permanente
Front differential lock	● Electro-hydraulic
Front swinging	● 15° right side + 15° left side
Minimum speed	● 0,58 Km/h
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Rear braking	● Multiplates oil-bath, hydraulic control
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Trailer brake mechanical lever support	● CUNA type
STEERING WHEEL	
Steering wheel system	● Hydrostatic
Steering angle	● 40°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
More speeds independent from gearbox	–
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Hydraulic control, multiplates bath-oil
Clutch control	● Electro-hydraulic
REAR LIFTER	
Type	● Hydraulic with position/draft control and LOM
Lifting capacity at the rear arms	● 2100 Kg
3-points hitch	● Category 1 and 2

DESCRIPTION	VALUE
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	○ Category 1 and 2 / 1 and 2 with fast connection
Type of lower arms	● Telescopic with fixed ball ends
Tipo bracci inferiori opzionali	○ Telescopic with quick couplers
Mechanical right tie rod	●
Hydraulic right tie rod	○
FRONT LIFTER	
Type	–
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 55 l/min with double pump
Third rear hydraulic scv	–
Rear hydraulic scv	● N.3 in 1 single block
Front hydraulic scv	–
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 850A 95Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	● Integral platform
Platform support	● Silent-block
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	–
Rear-view mirrors, LH and RH side	● Adjustable
Seat	● On spring suspension, with seat belt and OPS
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	
Rear tow hook	● C/CEE adjustable
Front tow hook	● Fix
Draw bar	–
WEIGHTS	
Front	–
By tyre filled with water	● With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1505 mm
Lenght (front bumper / rear lifting arms)	● 3245 mm
Width (min-max)	● 1223 - 1708 mm
Height with ROPS (min-max)	● 2268 - 2333 mm
Height on grille bonnet (min-max)	● 1086 - 1308 mm
Height at steering wheel (min-max)	● 1267 - 1370 mm
Height at seat (min-max)	● 855 - 979 mm
Height at rear mudguard (min-max)	● 938 - 1009 mm
Ground clearance (min-max)	● 268 - 333 mm
Distance between insides of tyres	● 542 - 997 mm
Minimum turning radius (internal)	● 2,83 m
Weight with roll-bar	● 2050 KG
WHEELS AND DIMENSIONS ROLL BAR VERSION	

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

DESCRIPTION	VALUE
Set of wheels Rear 8.25x16 Front 8.25x16	Minimum width 1447 mm; ○ Height 2170 mm; Ground clearance 172 mm
Set of wheels Rear 425/55R17 MPT Front 425/55R17 MPT	○
Set of wheels Rear 400/55-17.5 Front 400/55-17.5	○
Set of wheels Rear 250/80R18 Front 250/80R18	○
Set of wheels Rear 320/65R18 Front 320/65R18	○
Set of wheels Rear 280/70R18 Front 280/70R18	Minimum width 1552 mm; ○ Height 2220 mm; Ground clearance 222 mm
Set of wheels Rear 340/65R18 Front 340/65R18	○
Set of wheels Rear 300/70R20 Front 300/70R20	○
Set of wheels Rear 320/70R20 Front 320/70R20	○

**PRICE LIST**

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01100169- 1	E80 RS	€ 45,338
Wheels			
	01800383- 1	Set of wheels Rear 8.25x16 Front 8.25x16	€ 2,388
	01800890- 1	Set of wheels Rear 250/80R18 Front 250/80R18	€ 2,440
	01800423- 1	Set of wheels Rear 280/70R18 Front 280/70R18	€ 3,140
	01800847- 1	Set of wheels Rear 320/65R18 Front 320/65R18	€ 3,077
	01800892- 1	Set of wheels Rear 340/65R18 Front 340/65R18	€ 3,289
	01800894- 1	Set of wheels Rear 300/70R20 Front 300/70R20	€ 3,448
	01800896- 1	Set of wheels Rear 320/70R20 Front 320/70R20	€ 3,501
	01800898- 1	Set of wheels Rear 400/55-17.5 Front 400/55-17.5	€ 4,191
	01800900- 1	Set of wheels Rear 425/55R17 MPT Front 425/55R17 MPT	€ 3,767
Towing devices			
	01730345- 1	Rear tow hook category CEE-X D.28	€ 191
	01730346- 1	Rear tow hook category CEE D.31	€ 222
Documentation language			
	01700343- 1	Documentation - Italian version	€ 0
	01700344- 1	Documentation - English version	€ 0
	01700345- 1	Documentation - French version	€ 0
	01700350- 1	Documentation - German version	€ 0
	01700346- 1	Documentation - Spanish version	€ 0
	01700347- 1	Documentation - Portuguese version	€ 0
	01700348- 1	Documentation - Slovenian version	€ 0
	01700349- 1	Documentation - Croatian version	€ 0
	01700427- 1	Documentation - Greek version	€ 0
	01700430- 1	Documentation - Polish version	€ 0
	01700429- 1	Documentation - Czech version	€ 0
	01700428- 1	Documentation - Hebrew version	€ 0
Lifters			
	01640329- 1	Pair of rear arms cat. 1-1N	€ 191
	01640348- 1	Pair of rear arms cat. 1-1N with quick couplers	€ 456

OPTIONAL

Lifters			
	01640370- 1	Hydraulic registration for the 3rd point rear arm, with quick connection • Diverter required	€ 573
	01640349- 1	Hydraulic right tie rod • Diverter required	€ 435
Hydraulic SCVs			
	01640339- 1	3 rear hydraulic SCVs (2 double effect + 1 FLOAT + 1 KICK-OUT) + diverter	€ 318
Electrical fittings			

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



E80 RS

Equal-wheel tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
	01900134- 1	Adjustable rear worklight <ul style="list-style-type: none">• 01900134• Not available on cab versions	€ 106
	01900135- 1	Rotating lamp for roll bar <ul style="list-style-type: none">• Mandatory	€ 74

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- + 48 HP ENGINE**
- + 12+12 GEARBOX WITH FAST RELEASE
(ADDITIONAL 4 FAST REV SPEEDS)**
- + ITALIAN STYLE**
- + MULTIFUNCTIONAL**

Ronin is the range designed by Goldoni for a wide variety of specialistic uses: work in the open fields, between the rows of vineyards and orchards, in greenhouses and nurseries as well as all the many transport jobs required in farms and for professional ground care. Ronin is the answer for those who need a versatile, multifunction machine that possesses all the strong points of a Goldoni tractor: compact size, sturdiness and reliability.

NOTES



PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
MODEL	
Type	● Compact tractor
Structure	● Self supporting integral
ENGINE	
Trademark	● Lombardini
Model	● LDW 2204
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 35,3KW / 48hp
Legislation on emission	● STEP 3A
Number of cylinders	● 4
Aspiration	● Aspirated
Nominal rate	● 2800 rpm
Cooling	● On liquid
Swept volume	● 2199 cm3
Specific fuel consumption (maximum torque speed)	● 260 g/KWh
Max torque	● 130Nm@1600rpm
Torque reserve	● 8%
Tank capacity	● 45 litres
Engine bonnet	● VTR (Reinforced plastic with glass)
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 12+12+4 Fast Reverse
Gearbox control	● Mechanical with front lever
Clutch	● Dry Single-disc, diameter 9"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Mechanic
Front axle	● Four wheel drive
Front wheel drive coupling control	● Mechanic
Front axle swing	● 11°
Minimum speed	● 0,7 Km/h
Maximum speed (homologated)	● 30 Km/h
BRAKES	
Rear braking	● Multiplates bath oil, mechanical control
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Trailer brake mechanical lever support	● CUNA type
STEERING WHEEL	
Steering wheel system	● Hydrostatic
Steering angle	● 55°
REAR PTO	
Type	● Twin shaft, synchronized and independent
Independent speed from the gearbox	● 540/1000 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate
Clutch control	● Mechanic
Security	● PUSH & START device on PTO selector
FRONT PTO	
Type	○ Independent single shaft

DESCRIPTION	VALUE
Independent speed from the gearbox	○ 1000 rpm
Rotation way (looking at the pto)	○ Anticlockwise
Version	○ 6 grooves 1-3/8"
Clutch	○ Electromagnetic
Clutch control	○ Electric
REAR LIFTER	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 1800 Kg
3-points hitch	● Category 1
3rd point mechanical arm	● Category 1
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
FRONT LIFTER	
Type	○ Lifts and lowers hydraulic
Lifting capacity at the rear arms	○ 350 Kg
3-points hitch	○ Category 1N
3rd point mechanical arm	○ Category 1N
UNDER BELLY LIFTER	
Type	○ Floating and double acting
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 33 litres per minutes
Rear hydraulic scv	● N.2 in a monoblock double acting with recovery
Front hydraulic scv	○ Monobloc with 3 points front scv
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 500A 60Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	● Integral platform
Platform support	● Variable deformation silicone ● Silent-Block
Rear mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni Overview GL12 Full Glass with A/C
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
STANDARD CAB FITTING OUT	
ROPS homologation	● Goldoni Overview GL12 Full Glass
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper
Air filter cab treatment-repellent	○ Active charcoal
Front glass	● Openable
Rear glass	● Openable
Front wiper	● 1 speed
Rear wiper	● 1 speed
Front windscreen washer	● 0,5 litres

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

DESCRIPTION	VALUE
Rear-view mirror right/left	● Adjustable and lockable
Window shade	● Height adjustable
Rotating lamp set up	● Switch in cab and external bayonet coupling
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	● 2
Rear working light	● 2
Radio set up	● Radio and speakers housing
TOWING DEVICES	
Rear tow hook	○ Categoria X/Y (ex C/D2)
Front tow hook	● Fix
WEIGHTS	
Front	○ 75Kg in 5 pieces 15Kg each
By tyre filled with water	● With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1723 mm
Lenght (front bumper / rear lifting arms)	● 2949 mm
Length with ballast	● 3126 mm
Width (min-max)	● 1090 - 1500 mm
Height with ROPS (min-max)	● 1885-1940 mm
Height with Standard Cab (min-max)	○ 2090-2180 mm
Height on grille bonnet (min-max)	● 1033 - 1039 mm
Height at steering wheel (min-max)	● 1348 - 1374 mm
Height at seat (min-max)	● 1075 - 1187 mm
Height at rear mudguard (min-max)	● 1208 - 1240 mm
Ground clearance (min-max)	● 296 - 316 mm
Distance between insides of tyres	● 650 - 751 mm
Minimum turning radius (internal)	● 2,3 m
Front track (min-max)	● 900 - 1216 mm
Rear track (min-max)	● 834 - 1200 mm
Weight with roll-bar	● 1475 Kg
Weight with Standard cab	○ 1645 kg
Maximum laden mass	● 2500 Kg
Maximum towable weight (without braking), with roll bar	● 1475 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 4425 mm
Maximum towable weight (without braking), with standard cab	● 1645 kg
Maximum towable mass (with mechanical braking system), with standard cab	● 4935 kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear 8.3-24 Front 200/70R16	○ Min. width 1098 mm; Height 1948 mm; Ground clearance 302 mm
Set of wheels Rear 360/70R20 Front 11.0/65R12	○ Minimum width 1340 mm; Height 1959 mm; Ground clearance 316 mm
Set of wheels Rear 38/14x20 Front 27/8.5R15	○ Minimum width 1363 mm; Height 1933 mm; Ground clearance 296 mm
Set of wheels Rear 280/85R20 Front 200/70R16	○ Minimum width 1223 mm; Height 1940 mm; Ground clearance 302 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01560353- 1 01641063- 1	Ronin 50 - Roll-bar • Complete with rear lift arms	€ 24,911
	01560355- 1 01641063- 1	Ronin 50 - Roll-bar - Front Lift & PTO • Complete with rear lift arms	€ 30,003
	01560356- 1 01641063- 1	Ronin 50 - Standard Cab • Complete with rear lift arms	€ 31,956
	01560358- 1 01641063- 1	Ronin 50 - Standard cab - Front PTO and front lifter • Complete with rear lift arms	€ 37,049
Wheels			
	01800833- 1	Set of wheels Rear 280/85R20 Front 200/70R16	€ 2,525
	01800818- 1	Set of wheels Rear 360/70X20 Front 11.0/65X12	€ 2,748
	01800711- 1	Set of wheels Rear 320/70R24 Front 240/70R16	€ 2,600
	01800858- 1	Set of wheels Rear 8.3-24 Front 200/70R16	€ 2,519
	01800596- 1	Set of wheels Rear 38/14.00X20 Front 27/8.50X15 garden	€ 3,511
Towing devices			
	01730349- 1	Rear tow hook category CEE-X D.28	€ 191
	01730350- 1	Rear tow hook category CEE D.31	€ 222
Documentation language			
	01700495- 1	Documentation - Italian version	€ 0
	01700499- 1	Documentation - English version	€ 0
	01700496- 1	Documentation - Spanish version	€ 0
	01700497- 1	Documentation - French version	€ 0
	01700498- 1	Documentation - German version	€ 0
	01700500- 1	Documentation - Portuguese version	€ 0
	01700501- 1	Documentation - Slovenian version	€ 0
	01700502- 1	Documentation - Croatian version	€ 0
	01700503- 1	Documentation - Czech version	€ 0
	01700504- 1	Documentation - Polish version	€ 0
	01700505- 1	Documentation - Hungarian version	€ 0
	01700506- 1	Documentation - Greek version	€ 0

OPTIONAL

Front hydraulic scv			
	01640346- 1	Monobloc with 3 points front scv	€ 637
Weights			
	01800846- 1	Front weight set of 5x15 kg. (tot.75 kg.)	€ 329
Electrical fittings			
	01640347- 1	High beams KIT	€ 260
	01900128- 1	Rear working light	€ 106
	01900127- 1	Rotating lamp for roll bar	€ 74
	01900113- 1	Rotating lamp for cab	€ 74

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- +** THE SHORTEST WHEELBASE IN ITS CATEGORY
- +** EXCLUSIVE PATENTED GEARBOX WITH "DUAL POWER" SYSTEM
- +** MINIMUM TURNING RADIUS
- +** MAXIMUM STABILITY AND WHEEL GRIP THANKS TO OPTIMUM WEIGHT BALANCE

Goldoni S series is the optimal answer to the needs of professional users who work in vineyards and orchards: powerful and easily handled, reliable and able to provide an excellent performance, these tractors are the ideal partners when it comes to working in the often difficult conditions in which specialized crops are cultivated. One of the salient features of the S Plus series is its compact size.

NOTES

PRICE LIST
TECHNICAL FEATURES

● standard | ○ on demand | – not available

DESCRIPTION	VALUE
MODEL	
Type	● Specialized tractor
Structure	● Self supporting integral
Version	● Low
ENGINE	
Trademark	● VM
Model	● D703 E3
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 36 KW/49 hp
Legislation on emission	● STEP 3A
Number of cylinders	● 3
Aspiration	● Aspirated
Nominal rate	● 2300rpm
Cooling	● On liquid
Swept volume	● 2082 cm3
Specific fuel consumption (maximum torque speed)	● 242 g/KWh
Max torque	● 145Nm @ 1200 rpm
Torque reserve	● 8,8%
Tank capacity	● 50 litres
Engine bonnet	● RTM
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● DUAL POWER 16 +8 / 8 +8 synchronized
Gearbox control	● Mechanical with side levers
Clutch	● Dry Single-disc, diameter 9"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Mechanic
Front axle	● Four wheel drive
Front wheel drive coupling control	● Electro-hydraulic
Front wheel drive clutch	–
Front differential lock	–
Front axle swing	● 11°
Minimum speed	● 0,9 Km/h
Maximum speed (homologated)	● 30 Km/h
BRAKES	
Rear braking	● Multiplates bath oil, mechanical control
Front braking type	● Synchronized 4-wheel drive in braking
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	–
Trailer brake mechanical lever support	● CUNA type
STEERING WHEEL	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 55°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
More speeds independent from gearbox	–
Synchronized speed to the gearbox	● Yes

DESCRIPTION	VALUE
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate
Clutch control	● Mechanic
Security	● PUSH & START device on clutch pedal and PTO
FRONT PTO	
Type	–
REAR LIFTER	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 2300 Kg
3-points hitch	● Category 1 and 2
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	–
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
FRONT LIFTER	
Type	–
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 39 litres per minute
First rear hydraulic scv	● Switching to single and double acting valve
Second rear hydraulic scv	○ Single acting with coupling in floating position; or double acting with coupling levers; or double acting with recovery; or double acting with 4th floating position
Third rear hydraulic scv	○ Single acting with coupling in floating position; or double acting with coupling levers; or double acting with recovery; or double acting with 4th floating position
Front hydraulic scv	–
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 680A 74Ah
Security	● Battery disconnection
Instrument	● Analog
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	● Semi-platform
Platform support	–
Front mudguard	○ Independent, swivelling, rubber made
Rear mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	–
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes


**PRICE LIST**

DESCRIPTION	VALUE
Rear tow hook	○ C/CEE Category 7 heights adjustable
Front tow hook	● Fix
Draw bar	○ Swinging CEE-BT1 Category (2 heights available)
WEIGHTS	
Front	○ 100Kg 5 pcs 20 kg.each
By tyre filled with water	● With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1690 mm
Lenght (front bumper / rear lifting arms)	● 3231 mm
Width (min-max)	● 1364-1794 mm
Height with ROPS (min-max)	● 2040 mm
Height on grille bonnet (min-max)	● 1137 mm
Height at steering wheel (min-max)	● 1280 - 1328 mm
Height at seat (min-max)	● 1121-1149 mm
Height at rear mudguard (min-max)	● 1109-1143 mm
Ground clearance (min-max)	● 225 -250 mm
Distance between insides of tyres	● 724 - 1108 mm
Minimum turning radius (internal)	● 2,3 m
Weight with roll-bar	● 1930 Kg
Maximum laden mass	● 3050 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 5550 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear 320/70R24 Front 240/70R16	Minimum width 1364 mm; ● Height 2021 mm; Ground clearance 257 mm

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01091383- 1 01640847- 1	S60 - Roll-bar • Complete with rear lift arms	€ 29,668
Wheels			
	01800861- 1	Set of wheels Rear 320/70R24 Front 240/70R16	€ 2,600
	01800824- 1	Set of wheels Rear 360/70X20 Front 11.0/65X12	€ 2,769
	01800853- 1	Set of wheels Rear 41X14.00-20 Front 27X10.50-15 garden	€ 4,350
	01800471- 1	Set of wheels Rear 320/85R20 Front 11.0/65R12	€ 2,790
Towing devices			
	01730351- 1	Rear tow hook category CEE-X D.28	€ 191
	01730352- 1	Rear tow hook category CEE D.31	€ 222
	01730354- 1	Swinging drawbar category CEE-X D.28	€ 387
	01730353- 1	Swinging drawbar cat. CEE-D31	€ 387
Documentation language			
	01700385- 1	Documentation - Italian version	€ 0
	01700386- 1	Documentation - English version	€ 0
	01700387- 1	Documentation - French version	€ 0
	01700388- 1	Documentation - German version	€ 0
	01700389- 1	Documentation - Spanish version	€ 0
	01700390- 1	Documentation - Portuguese version	€ 0
	01700391- 1	Documentation - Slovenian version	€ 0
	01700392- 1	Documentation - Croatian version	€ 0
	01700393- 1	Documentation - Polish version	€ 0
	01700460- 1	Documentation - Greek version	€ 0
	01700461- 1	Documentation - Hungarian version	€ 0

OPTIONAL

Lifters			
	01640269- 1	Pair of stabilizers for rear lifter arms	€ 222
Rear hydraulic scv			
	01640335- 1	2nd rear hydraulic SCV, simple effect with coupling lever in floating position	€ 398
	01640336- 1	2nd rear hydraulic SCV, double effect with coupling lever	€ 424
	01640337- 1	2nd rear hydraulic SCV, double effect with recovery	€ 398
	01640338- 1	2nd rear hydraulic SCV, double effect with double coupling lever in floating position	€ 424
	01640331- 1	3rd rear hydraulic SCV, simple effect with coupling lever in floating position	€ 398
	01640332- 1	3rd rear hydraulic SCV, double effect with coupling lever	€ 424
	01640333- 1	3rd rear hydraulic SCV, double effect with recovery	€ 398
	01640334- 1	3rd rear hydraulic SCV, double effect with double coupling lever in floating position	€ 424
Weights			

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

**S60**

Specialized Tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
	01800663- 1	Front weight set of 5x20 Kg (tot.100 kg.)	€ 435
Electrical fittings			
	01900135- 1	Rotating lamp for roll bar <ul style="list-style-type: none">• Mandatory	€ 74
	01900092- 1	Rear working light <ul style="list-style-type: none">• Adjustable	€ 106
Front mudguard			
	01810013- 1	Pair of front mudguard	€ 435

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- +** SHORT WHEELBASE
- +** EXCLUSIVE PATENTED GEARBOX WITH "DUAL POWER" SYSTEM
- +** COMFORTABLE DRIVING: PLATFORM ON "SILENT BLOCKS" AND "OVERVIEW" CAB WITH A/C
- +** EXCELLENT WEIGHT/POWER RATIO AND BALANCED WEIGHTS
- +** TYPE-APPROVED FOR 40 KM/H

Goldoni S Plus series is the optimal answer to the needs of professional users who work in vineyards and orchards: powerful and easily handled, reliable and able to provide an excellent performance, these tractors are the ideal partners when it comes to working in the often difficult conditions in which specialized crops are cultivated. One of the salient features of the S Plus series is its compact size.

NOTES



PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | - not available

DESCRIPTION	VALUE
MODEL	
Type	● Specialized tractor
Structure	● Self supporting integral
Version	● Low
ENGINE	
Trademark	● VM
Model	● R754 ISET4
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 55 KW / 75 HP
Legislation on emission	● STAGE 3B
Number of cylinders	● 4
Aspiration	● Turbocharged
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 2970 cm3
Specific fuel consumption (maximum torque speed)	● 238 g/KWh
Max torque	● 310Nm@1100rpm
Torque reserve	● 53%
Tank capacity	● 50 litres
Engine bonnet	● RTM
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● DUAL POWER 16 +8 / 8 +8 synchronized
Gearbox control	● Mechanical with side levers
Clutch	● Dry single-disc, diameter 10"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Mechanic
Front axle	● 4-wheel drive engagement on the go
Front wheel drive coupling control	● Electro-hydraulic
Front wheel drive clutch	● Bath oil multiplates
Front differential lock	● NO-SPIN (Automatic)
Front axle swing	● 11°
Minimum speed	● 1,2 Km/h
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Rear braking	● Multiplates bath oil, mechanical control
Front braking type	● Synchronized 4-wheel drive in braking
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
STEERING WHEEL	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 55°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate

DESCRIPTION	VALUE
Clutch control	● Mechanic
Security	● PUSH & START device on clutch pedal and PTO
FRONT PTO	
Type	○ Independent single shaft
Independent speed from the gearbox	○ 1000 rpm
Rotation way (looking at the pto)	○ Anticlockwise
Version	○ 6 grooves 1-3/8"
Clutch	○ Electro-hydraulic
Clutch control	○ Electric
REAR LIFTER	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 2300 Kg
3-points hitch	● Category 1 and 2
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	-
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
FRONT LIFTER	
Type	○ Up and down
Lifting capacity at the rear arms	● 1000 Kg
3-points hitch	○ 1 and 1N category
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 43 litres/minute
First rear hydraulic scv	● Switching to single and double acting valve
Second rear hydraulic scv	● Double acting
Third rear hydraulic scv	○ Single acting with coupling in floating position; or double acting with coupling levers; or double acting with recovery; or double acting with 4th floating position
Front hydraulic scv	○ Maximum 3, single/double acting
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 850A 95Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	● Integral platform
Platform support	● Silent-block
Front mudguard	● Independent, swivelling, rubber made
Rear mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni Overview GL9
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt and OPS
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
STANDARD CAB FITTING OUT	
ROPS homologation	● GL9 type

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



S80 PLUS HIGH

Specialized Tractors

PRICE LIST

DESCRIPTION	VALUE
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper
Front glass	● Openable
Rear glass	● Openable
Front wiper	● 1 speed
Rear wiper	● 1 speed
Front windscreen washer	● 0,5 litres
Rear-view mirror right/left	● Adjustable and lockable
Window shade	● Height adjustable
Rotating lamp set up	● Switch in cab and external bayonet coupling
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	● 2
Rear working light	● 2
Radio set up	● Radio and speakers housing
TOWING DEVICES	
Rear tow hook	○ C/CEE Category 7 heights adjustable
Front tow hook	● Fix
Draw bar	○ Swinging CEE-BT1 Category (2 heights available)
WEIGHTS	
Front	○ 100Kg 5 pcs 20 kg.each
By tyre filled with water	● With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1854 mm
Length without ballast	● 3394 mm
Width (min-max)	● 1398 - 1818 mm
Height with ROPS (min-max)	● 2075 - 2121 mm
Height with Standard Cab (min-max)	○ 2196 - 2251 mm
Height on grille bonnet (min-max)	● 1106 - 1143 mm
Height at steering wheel (min-max)	● 1382 - 1407 mm
Height at seat (min-max)	● 1181 - 1237 mm
Height at rear mudguard (min-max)	● 1186 - 1205 mm
Ground clearance (min-max)	● 304 - 323 mm
Distance between insides of tyres	● 720 - 1108 mm
Minimum turning radius (internal)	● 2,90 m
Weight with roll-bar	● 1930 Kg
Weight with Standard cab	○ 2070 Kg
Maximum laden mass	● 3050 Kg
Maximum towable weight (without braking), with roll bar	● 1930 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 5000 Kg
Maximum towable weight (without braking), with standard cab	○ 2070 Kg
Maximum towable mass (with mechanical braking system), with standard cab	● 5000 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear 320/70R24 Front 240/70R16	○ Minimum width 1364 mm; Height 2163 mm; Ground clearance 304 mm
Set of wheels Rear 360/70R24 Front 260/70R16	○ Minimum width 1440 mm; Height 2176 mm; Ground clearance 323 mm
STANDARD CAB VERSION TYRES AND DIMENSION	
Set of wheels Rear 320/70R24 Front 240/70R16	○ Minimum width 1364 mm; Height 2206 mm; Ground clearance 304 mm

DESCRIPTION	VALUE
Set of wheels Rear 360/70R24 Front 260/70R16	○ Minimum width 1440 mm; Height 2225 mm; Ground clearance 323 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



S80 PLUS HIGH

Specialized Tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01091399- 1 01640847- 1	S80 Plus high - Roll-bar <ul style="list-style-type: none"> Complete with rear lift arms 	€ 41,247
	01091412- 1 01640847- 1	S80 Plus high - Standard cab <ul style="list-style-type: none"> Complete with rear lift arms Requires third hydraulic rear SCV 	€ 47,664
Wheels			
	01800861- 1	Set of wheels Rear 320/70R24 Front 240/70R16	€ 2,600
	01800768- 1	Set of wheels Rear 360/70R24 Front 260/70R16	€ 3,024
Towing devices			
	01730351- 1	Rear tow hook category CEE-X D.28	€ 191
	01730352- 1	Rear tow hook category CEE D.31	€ 222
	01730354- 1	Swinging drawbar category CEE-X D.28	€ 387
	01730353- 1	Swinging drawbar cat. CEE-D31	€ 387
Documentation language			
	01700385- 1	Documentation - Italian version	€ 0
	01700386- 1	Documentation - English version	€ 0
	01700387- 1	Documentation - French version	€ 0
	01700388- 1	Documentation - German version	€ 0
	01700389- 1	Documentation - Spanish version	€ 0
	01700390- 1	Documentation - Portuguese version	€ 0
	01700391- 1	Documentation - Slovenian version	€ 0
	01700392- 1	Documentation - Croatian version	€ 0
	01700393- 1	Documentation - Polish version	€ 0
	01700460- 1	Documentation - Greek version	€ 0
	01700461- 1	Documentation - Hungarian version	€ 0

OPTIONAL

Lifters			
	01640269- 1	Pair of stabilizers for rear lifter arms	€ 222
Power take off			
	01950069- 1	Front power take off 1000 rpm	€ 3,061
Lifters			
	01640741- 1 01640901- 1	Front up and down lifter <ul style="list-style-type: none"> SCV and his connecting flange included Pair of front lifter arms, category 1 	€ 2,132
Rear hydraulic scv			
	01640331- 1	3rd rear hydraulic SCV, simple effect with coupling lever in floating position	€ 398
	01640332- 1	3rd rear hydraulic SCV, double effect with coupling lever	€ 424
	01640333- 1	3rd rear hydraulic SCV, double effect with recovery	€ 398
	01640334- 1	3rd rear hydraulic SCV, double effect with double coupling lever in floating position	€ 424
Front hydraulic scv			
	01640377- 1	Set up kit for front scv assembling	€ 424

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



S80 PLUS HIGH

Specialized Tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
	01640882- 1	Front hydraulic scv, simple effect with coupling lever in floating position	€ 398
	01640883- 1	Front hydraulic scv, double effect	€ 403
	01640884- 1	Front hydraulic scv, double effect with double coupling lever	€ 409
	01640885- 1	Front hydraulic scv, double effect with coupling lever and 4th floating position	€ 414
Weights			
	01800663- 1	Front weight set of 5x20 Kg (tot.100 kg.)	€ 435
Electrical fittings			
	01900135- 1	Rotating lamp for roll bar <ul style="list-style-type: none">• Mandatory	€ 74
	01900136- 1	Rotating lamp for standard cab <ul style="list-style-type: none">• Mandatory	€ 74
	01900092- 1	Rear working light <ul style="list-style-type: none">• Adjustable	€ 106

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- +** SHORT WHEELBASE
- +** EXCLUSIVE PATENTED GEARBOX WITH "DUAL POWER" SYSTEM
- +** COMFORTABLE DRIVING: PLATFORM ON "SILENT BLOCKS" AND "OVERVIEW" CAB WITH A/C
- +** EXCELLENT WEIGHT/POWER RATIO AND BALANCED WEIGHTS
- +** TYPE-APPROVED FOR 40 KM/H

Goldoni S Plus series is the optimal answer to the needs of professional users who work in vineyards and orchards: powerful and easily handled, reliable and able to provide an excellent performance, these tractors are the ideal partners when it comes to working in the often difficult conditions in which specialized crops are cultivated. One of the salient features of the S Plus series is its compact size.

NOTES



PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
MODEL	
Type	● Specialized tractor
Structure	● Self supporting integral
Version	● Low
ENGINE	
Trademark	● VM
Model	● R754 ISET4
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 55 KW / 75 HP
Legislation on emission	● STAGE 3B
Number of cylinders	● 4
Aspiration	● Turbocharged
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 2970 cm3
Specific fuel consumption (maximum torque speed)	● 238 g/KWh
Max torque	● 310Nm@1100rpm
Torque reserve	● 53%
Tank capacity	● 50 litres
Engine bonnet	● RTM
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● DUAL POWER 16 +8 / 8 +8 synchronized
Gearbox control	● Mechanical with side levers
Clutch	● Dry single-disc, diameter 10"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Mechanic
Front axle	● 4-wheel drive engagement on the go
Front wheel drive coupling control	● Electro-hydraulic
Front wheel drive clutch	● Bath oil multiplates
Front differential lock	● NO-SPIN (Automatic)
Front axle swing	● 11°
Minimum speed	● 1,0 Km/h
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Rear braking	● Multiplates bath oil, mechanical control
Front braking type	● Synchronized 4-wheel drive in braking
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
STEERING WHEEL	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 55°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate

DESCRIPTION	VALUE
Clutch control	● Mechanic
Security	● PUSH & START device on clutch pedal and PTO
FRONT PTO	
Type	○ Independent single shaft
Independent speed from the gearbox	○ 1000 rpm
Rotation way (looking at the pto)	○ Anticlockwise
Version	○ 6 grooves 1-3/8"
Clutch	○ Electro-hydraulic
Clutch control	○ Electric
REAR LIFTER	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 2300 Kg
3-points hitch	● Category 1 and 2
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	—
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
FRONT LIFTER	
Type	○ Up and down
Lifting capacity at the rear arms	● 1000 Kg
3-points hitch	○ 1 and 1N category
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 43 litres/minute
First rear hydraulic scv	● Switching to single and double acting valve
Second rear hydraulic scv	● Double acting
Third rear hydraulic scv	○ Single acting with coupling in floating position; or double acting with coupling levers; or double acting with recovery; or double acting with 4th floating position
Front hydraulic scv	○ Maximum 3, single/double acting
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 850A 95Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	● Integral platform
Platform support	● Silent-block
Front mudguard	● Independent, swivelling, rubber made
Rear mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni Overview GL9
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt and OPS
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
STANDARD CAB FITTING OUT	
ROPS homologation	● GL9 type

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



S80 PLUS LOW

Specialized Tractors

PRICE LIST

DESCRIPTION	VALUE
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper
Air filter cab treatment-repellent	○ Active charcoal
Front glass	● Openable
Rear glass	● Openable
Front wiper	● 1 speed
Rear wiper	● 1 speed
Front windscreen washer	● 0,5 litres
Rear-view mirror right/left	● Adjustable and lockable
Window shade	● Height adjustable
Rotating lamp set up	● Switch in cab and external bayonet coupling
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	● 2
Rear working light	● 2
Radio set up	● Radio and speakers housing
TOWING DEVICES	
Rear tow hook	○ C/CEE Category 7 heights adjustable
Front tow hook	● Fix
Draw bar	○ Swinging CEE-BT1 Category (2 heights available)
WEIGHTS	
Front	○ 100Kg 5 pcs 20 kg.each
By tyre filled with water	● With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1831 mm
Width (min-max)	● 1364-1794 mm
Height with ROPS (min-max)	● 2010 - 2056 mm
Height with Standard Cab (min-max)	○ 2131 - 2169 mm
Height on grille bonnet (min-max)	● 1106 - 1143 mm
Height at steering wheel (min-max)	● 1275 - 1350 mm
Height at seat (min-max)	● 1125 - 1134 mm
Height at rear mudguard (min-max)	● 1120 - 1175 mm
Ground clearance (min-max)	● 212 - 267 mm
Distance between insides of tyres	● 654 - 1109 mm
Minimum turning radius (internal)	● 2,90 m
Weight with roll-bar	● 1930 Kg
Weight with Standard cab	○ 2070 Kg
Maximum laden mass	● 3050 Kg
Maximum towable weight (without braking), with roll bar	● 1940 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 5000 Kg
Maximum towable weight (without braking), with standard cab	○ 2070 Kg
Maximum towable mass (with mechanical braking system), with standard cab	● 5000 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear 360/70R20 Front 11.0/65R12	○ Minimum width 1464 mm; Height 2131 mm; Ground clearance 212 mm
Set of wheels Rear 320/70R24 Front 240/70R16	○ Minimum width 1364 mm; Height 2135 mm; Ground clearance 248 mm
Set of wheels Rear 360/70R24 Front 260/70R16	○ Minimum width 1464 mm; Height 2148 mm; Ground clearance 267 mm
STANDARD CAB VERSION TYRES AND DIMENSION	

DESCRIPTION	VALUE
Set of wheels Rear 320/70R24 Front 240/70R16	○ Minimum width 1364 mm; Height 2150 mm; Ground clearance 248 mm
Set of wheels Rear 360/70R20 Front 11.0/65R12	○ Minimum width 1464 mm; Height 2131 mm; Ground clearance 212 mm
Set of wheels Rear 360/70R24 Front 260/70R16	○ Minimum width 1464 mm; Height 2148 mm; Ground clearance 267 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



S80 PLUS LOW

Specialized Tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01091398- 1 01640847- 1	S80 Plus low - Roll-bar <ul style="list-style-type: none"> Complete with rear lift arms 	€ 40,382
	01091411- 1 01640847- 1	S80 Plus low - Standard cab <ul style="list-style-type: none"> Complete with rear lift arms Requires third rear hydraulic SCV, DE with double coupling lever in floating position 	€ 46,799
Wheels			
	01800861- 1	Set of wheels Rear 320/70R24 Front 240/70R16	€ 2,600
	01800768- 1	Set of wheels Rear 360/70R24 Front 260/70R16	€ 3,024
	01800824- 1	Set of wheels Rear 360/70X20 Front 11.0/65X12	€ 2,769
	01800853- 1	Set of wheels Rear 41X14.00-20 Front 27X10.50-15 garden	€ 4,350
Towing devices			
	01730351- 1	Rear tow hook category CEE-X D.28	€ 191
	01730352- 1	Rear tow hook category CEE D.31	€ 222
	01730354- 1	Swinging drawbar category CEE-X D.28	€ 387
	01730353- 1	Swinging drawbar cat. CEE-D31	€ 387
Documentation language			
	01700385- 1	Documentation - Italian version	€ 0
	01700386- 1	Documentation - English version	€ 0
	01700387- 1	Documentation - French version	€ 0
	01700388- 1	Documentation - German version	€ 0
	01700389- 1	Documentation - Spanish version	€ 0
	01700390- 1	Documentation - Portuguese version	€ 0
	01700391- 1	Documentation - Slovenian version	€ 0
	01700392- 1	Documentation - Croatian version	€ 0
	01700393- 1	Documentation - Polish version	€ 0
	01700460- 1	Documentation - Greek version	€ 0
	01700461- 1	Documentation - Hungarian version	€ 0

OPTIONAL

Lifters			
	01640269- 1	Pair of stabilizers for rear lifter arms	€ 222
Power take off			
	01950069- 1	Front power take off 1000 rpm	€ 3,061
Lifters			
	01640741- 1 01640901- 1	Front up and down lifter <ul style="list-style-type: none"> SCV and his connecting flange included Pair of front lifter arms, category 1 	€ 2,132
Rear hydraulic scv			
	01640331- 1	3rd rear hydraulic SCV, simple effect with coupling lever in floating position	€ 398
	01640332- 1	3rd rear hydraulic SCV, double effect with coupling lever	€ 424
	01640333- 1	3rd rear hydraulic SCV, double effect with recovery	€ 398

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



S80 PLUS LOW

Specialized Tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
	01640334- 1	3rd rear hydraulic SCV, double effect with double coupling lever in floating position	€ 424
Front hydraulic scv			
	01640377- 1	Set up kit for front scv assembling	€ 424
	01640882- 1	Front hydraulic scv, simple effect with coupling lever in floating position	€ 398
	01640883- 1	Front hydraulic scv, double effect	€ 403
	01640884- 1	Front hydraulic scv, double effect with double coupling lever	€ 409
	01640885- 1	Front hydraulic scv, double effect with coupling lever and 4th floating position	€ 414
Hydraulic trailer braking system			
Weights			
	01800663- 1	Front weight set of 5x20 Kg (tot.100 kg.)	€ 435
Electrical fittings			
	01900135- 1	Rotating lamp for roll bar <ul style="list-style-type: none">• Mandatory	€ 74
	01900136- 1	Rotating lamp for standard cab <ul style="list-style-type: none">• Mandatory	€ 74
	01900092- 1	Rear working light <ul style="list-style-type: none">• Adjustable	€ 106
Front mudguard			
	01810013- 1	Pair of front mudguard	€ 435

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- +** THE SHORTEST WHEELBASE IN ITS CATEGORY
- +** EXCLUSIVE PATENTED GEARBOX WITH "DUAL POWER" SYSTEM
- +** MINIMUM TURNING RADIUS
- +** MAXIMUM STABILITY AND WHEEL GRIP THANKS TO OPTIMUM WEIGHT BALANCE

Goldoni S series is the optimal answer to the needs of professional users who work in vineyards and orchards: powerful and easily handled, reliable and able to provide an excellent performance, these tractors are the ideal partners when it comes to working in the often difficult conditions in which specialized crops are cultivated. One of the salient features of the S Plus series is its compact size.

NOTES



PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | – not available

DESCRIPTION	VALUE
MODEL	
Type	● Specialized tractor
Structure	● Self supporting integral
Version	● Low
ENGINE	
Trademark	● VM
Model	● R754 ISET4
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 55 KW / 75 HP
Legislation on emission	● STAGE 3B
Number of cylinders	● 4
Aspiration	● Turbocharged
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 2970 cm ³
Specific fuel consumption (maximum torque speed)	● 238 g/KWh
Max torque	● 310Nm@110rpm
Torque reserve	● 53%
Tank capacity	● 50 litres
Engine bonnet	● RTM
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● DUAL POWER 16 +8 / 8 +8 synchronized
Gearbox control	● Mechanical with side levers
Clutch	● Dry single-disc, diameter 10"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Mechanic
Front axle	● Four wheel drive
Front wheel drive coupling control	● Electro-hydraulic
Front wheel drive clutch	● Bath oil multiplates
Front differential lock	● NO-SPIN (Automatic)
Front axle swing	● 11°
Minimum speed	● 0,9 Km/h
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Rear braking	● Multiplates bath oil, mechanical control
Front braking type	● Synchronized 4-wheel drive in braking
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	–
Trailer brake mechanical lever support	● CUNA type
STEERING WHEEL	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 55°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
More speeds independent from gearbox	–
Synchronized speed to the gearbox	● Yes

DESCRIPTION	VALUE
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate
Clutch control	● Mechanical with lever
Security	● PUSH & START device on clutch pedal and PTO
FRONT PTO	
Type	–
REAR LIFTER	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 2300 Kg
3-points hitch	● Category 1 and 2
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	–
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
FRONT LIFTER	
Type	–
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● 43 litres/minute
First rear hydraulic scv	● Switching to single and double acting valve
Second rear hydraulic scv	○ Single acting with coupling in floating position; or double acting with coupling levers; or double acting with recovery; or double acting with 4th floating position
Third rear hydraulic scv	○ Single acting with coupling in floating position; or double acting with coupling levers; or double acting with recovery; or double acting with 4th floating position
Front hydraulic scv	–
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 850A 95Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	● Semi-platform
Platform support	–
Front mudguard	○ Independent, swivelling, rubber made
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	–
Rear-view mirrors, LH and RH side	● Adjustable
Seat	● On spring suspension, with seat belt and OPS
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

DESCRIPTION	VALUE
TOWING DEVICES	
Rear tow hook	○ C/CEE Category 7 heights adjustable
Front tow hook	● Fix
Draw bar	○ Swinging, cat. CEE-BT1
WEIGHTS	
Front	○ 100Kg 5 pcs 20 kg.each
By tyre filled with water	● With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1831 mm
Length (front bumper / rear lifting arms)	● 3231 mm
Length with ballast	● 3344 mm
Width (min-max)	● 1364-1794 mm
Height with ROPS (min-max)	● 2007 - 2037 mm
Height on grille bonnet (min-max)	● 1106 - 1131 mm
Height at steering wheel (min-max)	● 1268 - 1333 mm
Height at seat (min-max)	● 1121-1149 mm
Height at rear mudguard (min-max)	● 1109-1143 mm
Ground clearance (min-max)	● 225 -250 mm
Distance between insides of tyres	● 654 - 1109 mm
Minimum turning radius (internal)	● 2,4 m
Weight with roll-bar	● 1940 Kg
Maximum laden mass	● 3050 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 5790 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear 360/70R20 Front 11.0/65R12	○ Minimum width 1464 mm; Height 2108 mm; Ground clearance 242 mm
Set of wheels Rear 320/70R24 Front 240/70R16	○ Minimum width 1364 mm; Height 2075 mm; Ground clearance 243 mm
Set of wheels Rear 320/85R20 Front 11.0/65R12	● Minimum width 1364 mm; Height 2108 mm; Ground clearance 242 mm
Set of wheels Rear 41x14.00-20 Front 10.50-15 GARDEN	● Minimum width 1487 mm; Height 2030 mm; Ground clearance 217 mm



S80 40KPH

Specialized Tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01092423- 1 01640847- 1	S80 - Roll-bar • 40 Km/h	€ 38,351
Wheels			
	01800824- 1	Set of wheels Rear 360/70X20 Front 11.0/65X12	€ 2,769
	01800861- 1	Set of wheels Rear 320/70R24 Front 240/70R16	€ 2,600
	01800853- 1	Set of wheels Rear 41X14.00-20 Front 27X10.50-15 garden	€ 4,350
	01800471- 1	Set of wheels Rear 320/85R20 Front 11.0/65R12	€ 2,790
Towing devices			
	01730351- 1	Rear tow hook category CEE-X D.28	€ 191
	01730352- 1	Rear tow hook category CEE D.31	€ 222
	01730354- 1	Swinging drawbar category CEE-X D.28	€ 387
	01730353- 1	Swinging drawbar cat. CEE-D31	€ 387
Documentation language			
	01700385- 1	Documentation - Italian version	€ 0
	01700386- 1	Documentation - English version	€ 0
	01700387- 1	Documentation - French version	€ 0
	01700388- 1	Documentation - German version	€ 0
	01700389- 1	Documentation - Spanish version	€ 0
	01700390- 1	Documentation - Portuguese version	€ 0
	01700391- 1	Documentation - Slovenian version	€ 0
	01700392- 1	Documentation - Croatian version	€ 0
	01700393- 1	Documentation - Polish version	€ 0
	01700460- 1	Documentation - Greek version	€ 0
	01700461- 1	Documentation - Hungarian version	€ 0

OPTIONAL

Lifters			
	01640269- 1	Pair of stabilizers for rear lifter arms	€ 222
Rear hydraulic scv			
	01640335- 1	2nd rear hydraulic SCV, simple effect with coupling lever in floating position	€ 398
	01640336- 1	2nd rear hydraulic SCV, double effect with coupling lever	€ 424
	01640337- 1	2nd rear hydraulic SCV, double effect with recovery	€ 398
	01640338- 1	2nd rear hydraulic SCV, double effect with double coupling lever in floating position	€ 424
	01640331- 1	3rd rear hydraulic SCV, simple effect with coupling lever in floating position	€ 398
	01640332- 1	3rd rear hydraulic SCV, double effect with coupling lever	€ 424
	01640333- 1	3rd rear hydraulic SCV, double effect with recovery	€ 398
	01640334- 1	3rd rear hydraulic SCV, double effect with double coupling lever in floating position	€ 424
Weights			
	01800663- 1	Front weight set of 5x20 Kg (tot.100 kg.)	€ 435

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



S80 40KPH

Specialized Tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
Electrical fittings			
	01900135- 1	Rotating lamp for roll bar <ul style="list-style-type: none">• Mandatory	€ 74
	01900092- 1	Rear working light <ul style="list-style-type: none">• Adjustable	€ 106
Front mudguard			
	01810013- 1	Pair of front mudguard	€ 435

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- + STAGE 3B**
- + GEARBOX 24+12 SYNCHRONIZED**
- + MAXIMUM LUGGING POWER AND WHEEL GRIP
THANKS TO ITS LOW CENTER OF GRAVITY**
- + "LOW PROFILE" VERSION WITH SUPER-
LOWERED CAB FROM 180 CM**
- + COMFORTABLE DRIVING: PLATFORM ON
"SILENT BLOCKS" WITH VARIABLE VISCOSITY**
- + MORE VERSATILE THAN AN EQUAL-WHEEL
TRACTOR, MORE PERFORMANCE-ORIENTED
THAN A CRAWLER TRACTOR, EXCELLENT ON
THE ROADS**
- + PERFECTLY BALANCED WEIGHTS**

Q is a class of its own and know no rivals on the market. The bodywork with its aggressive and sloping design, the tight turning radius, the big, almost isodiametric driving wheels and the powerful engine make Q the ideal machine for working between the rows of orchards and vineyards with low plants, where there's not much room for manoeuvring, and generally speaking, on heavy soil, sloping and rugged ground. Thanks to the compact bearing structure, which distributes 50% of the weight on the front axle and 50% on the rear one, the center of gravity has been kept low and near to the middle of the machine, while all the traction is fully discharged towards the ground, thus allowing the operator to work in complete safety even with very heavy implements and steeply sloping ground.

NOTES

PRICE LIST
TECHNICAL FEATURES

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
MODEL	
Type	● Specialized tractor
Structure	● Self supporting integral
Version	● Low
ENGINE	
Trademark	● VM
Model	● R754 IE417
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 67 KW / 91,1 HP
Legislation on emission	● STAGE 3B
Number of cylinders	● 4
Aspiration	● Intercooler turbocharged
Nominal rate	● 2300rpm
Cooling	● On liquid
Swept volume	● 2970 cm3
Specific fuel consumption (maximum torque speed)	● 212 g/KWh
Max torque	● 380Nm@ 1100rpm
Torque reserve	● 34%
Tank capacity	● 70 liters
Engine bonnet	● SMC
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 24+12 synchronized
Gearbox control	● Mechanical with side levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Electro-hydraulic
Front axle	● 4-wheel drive engagement on the go
Front wheel drive coupling control	● Electro-hydraulic
Front wheel drive clutch	● Bath oil multiplates
Front differential lock	● NO-SPIN (Automatic)
Front axle swing	● 12°
Minimum speed	● 0,4 Km/h
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Rear braking	● Multiplates oil-bath, hydraulic control
Front braking type	● Synchronized 4-wheel drive in braking
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	○ Hydraulic control acting on main circuit
STEERING WHEEL	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 57°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate
Clutch control	● Mechanical with lever

DESCRIPTION	VALUE
Security	● PUSH & START device on PTO selector
FRONT PTO	
Type	○ Independent single shaft
Independent speed from the gearbox	○ 1000 rpm
Rotation way (looking at the pto)	○ Anticlockwise
Version	○ 6 grooves 1-3/8"
Clutch	○ Electro-hydraulic
Clutch control	○ Electric
REAR LIFTER	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 2500 Kg
Electronic Rear Lift	○
3-points hitch	● Category 1 and 2
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	○ Category 1 and 2 / 1 and 2 with fast connection
Type of lower arms	● Telescopic with quick connection
Hydraulic right tie rod	●
FRONT LIFTER	
Type	○ Up and down
Lifting capacity at the rear arms	○ 1200 Kg
3-points hitch	○ Category 1
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● Double pump, 38 + 61 liters per minute
Rear hydraulic scv	● N.3 in 1 single block
Optional rear hydraulic SCVs	○ 1 meccanico (con diverter) ○ 2 elettronici (solo con sollevatore elettronico)
Front hydraulic scv	○ 3 electronic
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 850A 95Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	● Orange
OPERATING POSITION	
Platform	● Integral platform
Platform support	● Variable deformation silicone ● Silent-Block
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni Overview
Low profile cab	○ Goldoni LowProfile
Rear-view mirrors, LH and RH side	● Adjustable
Seat	● On spring suspension, with seat belt and OPS
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
STANDARD CAB FITTING OUT	
Side doors	● With bar, gas spring, key closing

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

DESCRIPTION	VALUE
Cab air filter dust-repellent	● Paper
Front glass	● Openable
Rear glass	● Openable
Front wiper	● 1 speed
Rear wiper	● 1 speed
Front windscreen washer	● 0,5 litres
Rear-view mirror right/left	● Adjustable and lockable
Window shade	● Height adjustable
Rotating lamp set up	● Switch in cab and external bayonet coupling
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	● 2
Rear working light	● 2
Radio set up	● Radio and speakers housing
LOW AND SUPER LOW PROFILE CAB TRIM	
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper
Front glass	● Heat-absorbing fixed
Rear glass	● Openable
Front wiper	● 1 speed
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	-
Rear working light	● 2
Radio set up	-
TOWING DEVICES	
Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable
SLIDER Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable, slider type
Front tow hook	● Fix
Draw bar	○ Swinging, category CEE/CEE-X
WEIGHTS	
Front	○ 204Kg 6 pieces 34Kg each
By tyre filled with water	● With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1925 mm
Length with ballast	● 3681 - 3781 mm
Length without ballast	● 3421 - 3521 mm
Width (min-max)	● 1170 - 1878 mm
Height with ROPS (min-max)	● 2170 - 2245 mm
Height with Standard Cab (min-max)	● 2075 - 2150 mm
Height with Super Low Profile cab (min-max)	● 1804 - 1879 mm
Height on grille bonnet (min-max)	● 1134 - 1185 mm
Height at steering wheel (min-max)	● 1204 - 1330 mm
Height at seat (min-max)	● 852 - 1186 mm
Height at rear mudguard (min-max)	● 1075 - 1119 mm
Bonnet height	● 1250 - 1325 mm
Ground clearance (min-max)	● 171-216 mm
Distance between insides of tyres	● 716-1115 mm
Minimum turning radius (internal)	○ 2,83 m
Weight with roll-bar	● 2275 Kg
Weight with Standard cab	● 2425 Kg
Weight with super low profile cab	● 2540 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear 340/65R20 Front 280/70R16	Min. width 1447mm; Height ● 2170mm; Ground clearance 172mm

DESCRIPTION	VALUE
Set of wheels Rear 360/70R20 Front 280/70R18	Min. width 1464mm; Height ● 2220mm; Ground clearance 222mm
Set of wheels Rear 420/65R20 Front 320/65R18	Min. width 1552mm; Height ● 2220mm; Ground clearance 222mm
STANDARD CAB VERSION TYRES AND DIMENSION	
Set of wheels Rear 340/65R20 Front 280/70R16	Min. width 1447mm; Height ● 2039mm; Ground clearance 172mm
Set of wheels Rear 360/70R20 Front 280/70R18	Min. width 1464mm; Height ● 2089mm; Ground clearance 222mm
Set of wheels Rear 420/65R20 Front 320/65R18	Min. width 1552mm; Height ● 2089mm; Ground clearance 222mm
SUPER LOW PROFILE CAB VERSION TYRES AND DIMENSIONS	
Set of wheels Rear 340/65R20 Front 280/70R16	Min. width 1447mm; Height ● 1804mm; Ground clearance 172mm
Set of wheels Rear 360/70R20 Front 280/70R18	Min. width 1464mm; Height ● 1854mm; Ground clearance 222mm
Set of wheels Rear 420/65R20 Front 320/65R18	Min. width 1552mm; Height ● 1854mm; Ground clearance 222mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01093532- 1	Q100 - Roll-bar	€ 51,279
	01093527- 1	Q100 - Standard cab	€ 57,984
	01093525- 1	Q100 - Standard cab with ELECTRONIC REAR LIFT <ul style="list-style-type: none"> • 2 electronic rear SCVs included 	€ 60,168
	01093538- 1	Q100 - Low Profile cab	€ 60,402
	01093536- 1	Q100 - Low Profile cab with ELECTRONIC REAR LIFT <ul style="list-style-type: none"> • 2 electronic rear SCVs included 	€ 62,588
Wheels			
	01800856- 1	Set of wheels Rear 340/65R20 Front 280/70R16	€ 2,716
	01800577- 1	Set of wheels Rear 360/70R20 Front 280/70R18	€ 3,130
	01800904- 1	Set of wheels Rear 420/65R20 Front 320/65R18	€ 3,448
Towing devices			
	01730509- 1	Rear tow hook category CEE-X D.28	€ 228
	01730510- 1	Rear tow hook category CEE-X D.28, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded 	€ 266
	01730511- 1	Rear tow hook category CEE D.31	€ 329
	01730512- 1	Rear tow hook category CEE D.31, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded 	€ 329
	01730516- 1	Rear tow hook category CEE-Y D.43 <ul style="list-style-type: none"> • Mandatory with Hydraulic Trailer Brake 	€ 361
	01730517- 1	Rear tow hook category CEE-Y D.43, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded • Mandatory with Hydraulic Trailer Brake 	€ 361
	01730514- 1	Swinging drawbar category CEE-X D.28	€ 392
	01730513- 1	Swinging drawbar cat. CEE-D31	€ 392
	01730515- 1	Sliding tow hook guides, SLIDER type	€ 266
Documentation language			
	01700310- 1	Documentation - Italian version	€ 0
	01700311- 1	Documentation - English version	€ 0
	01700312- 1	Documentation - French version	€ 0
	01700313- 1	Documentation - German version	€ 0
	01700314- 1	Documentation - Spanish version	€ 0
	01700330- 1	Documentation - Portuguese version	€ 0
	01700331- 1	Documentation - Slovenian version	€ 0
	01700332- 1	Documentation - Croatian version	€ 0
	01700415- 1	Documentation - Czech version	€ 0
	01700413- 1	Documentation - Greek version	€ 0
	01700416- 1	Documentation - Polish version	€ 0
	01700414- 1	Documentation - Hebrew version	€ 0
	01700464- 1	Documentation - Hungarian version	€ 0
	01700535- 1	Documentation - Romanian version	€ 0
OPTIONAL			
Lifters			

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

PRICE LIST

	PART NUMBER	DESCRIPTION	€
	01640313- 1	Front up and down lifter <ul style="list-style-type: none"> • 01640313 • For rear SCV • Including pair of front lift arms, cat. 1 • Front PTO Mandatory 	€ 2,652
	01640314- 1	Front up and down lifter <ul style="list-style-type: none"> • 01640314 • For front SCV • Pair of front lifter arms, category 1 • Front PTO Mandatory 	€ 2,652
	01640315- 1	Hydraulic registration for the rear arm 3rd point, 1-2 category <ul style="list-style-type: none"> • 01640315 • Diverter required with mechanical rear lift 	€ 446
	01640316- 1	Hydraulic registration for the 3rd point rear arm, with quick connection <ul style="list-style-type: none"> • Diverter required with mechanical rear lift • 01640316 	€ 584
Power take off			
	01950078- 1	Front power take off 1000 rpm <ul style="list-style-type: none"> • 01950078 	€ 3,555
Hydraulic SCVs			
	01640318- 1	3 hydraulic rear SCVs + diverter (2 double effect + 1 FLOAT + 1 KICK-OUT) + 3 electronic front SCVs (2 double effect + 1 FLOAT) with flow divider + electronic joystick on gear lever <ul style="list-style-type: none"> • 01640318 • For mechanical lift 	€ 2,026
	01640320- 1	5 rear SCVs + 3 front SCVs: 3 hydraulic rear SCVs (1 double effect + 1 FLOAT + 1 KICK-OUT) + 2 electronic rear SCVs + 3 electronic front SCVs with flow divider + electronic joystick on gear lever <ul style="list-style-type: none"> • 01640320 • For rear electronic lift 	€ 1,655
Diverter			
	01640317- 1	Diverter on STD/DE <ul style="list-style-type: none"> • 01640317 • For mechanical lift 	€ 372
Push-pull			
Weights			
	01800882- 1	Front weight set kg.34x6(tot. 204Kg)	€ 801
Hydraulic trailer braking system			
	01640324- 1 01640375- 1	Hydraulic trailer braking system CUNA type (Italy) <ul style="list-style-type: none"> • For Italy only • 01640375 	€ 1,125
	01640324- 1 01640376- 1	Hydraulic trailer braking system MOTHER REGULATION type <ul style="list-style-type: none"> • 01640376 	€ 1,623
Electrical fittings			
	01900134- 1	Adjustable rear worklight <ul style="list-style-type: none"> • 01900134 • Not available on cab versions 	€ 106
	01900135- 1	Rotating lamp for roll bar <ul style="list-style-type: none"> • Mandatory 	€ 74
	01900136- 1	Rotating lamp for standard cab <ul style="list-style-type: none"> • Mandatory 	€ 74

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

**Q100**

Specialized Tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
	01900137- 1	Rotating lamp for Low Profile cab • Mandatory	€ 74

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- + STAGE 3B**
- + GEARBOX 24+12 SYNCHRONIZED**
- + MAXIMUM LUGGING POWER AND WHEEL GRIP
THANKS TO ITS LOW CENTER OF GRAVITY**
- + "LOW PROFILE" VERSION WITH SUPER-
LOWERED CAB FROM 180 CM**
- + COMFORTABLE DRIVING: PLATFORM ON
"SILENT BLOCKS" WITH VARIABLE VISCOSITY**
- + MORE VERSATILE THAN AN EQUAL-WHEEL
TRACTOR, MORE PERFORMANCE-ORIENTED
THAN A CRAWLER TRACTOR, EXCELLENT ON
THE ROADS**
- + PERFECTLY BALANCED WEIGHTS**

Q is a class of its own and know no rivals on the market. The bodywork with its aggressive and sloping design, the tight turning radius, the big, almost isodiametric driving wheels and the powerful engine make Q the ideal machine for working between the rows of orchards and vineyards with low plants, where there's not much room for manoeuvring, and generally speaking, on heavy soil, sloping and rugged ground. Thanks to the compact bearing structure, which distributes 50% of the weight on the front axle and 50% on the rear one, the center of gravity has been kept low and near to the middle of the machine, while all the traction is fully discharged towards the ground, thus allowing the operator to work in complete safety even with very heavy implements and steeply sloping ground.

NOTES

PRICE LIST
TECHNICAL FEATURES

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
MODEL	
Type	● Specialized tractor
Structure	● Self supporting integral
Version	● Low
ENGINE	
Trademark	● VM
Model	● R754 IE417
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 76 KW / 102 hp
Legislation on emission	● STAGE 3B
Number of cylinders	● 4
Aspiration	● Intercooler turbocharged
Nominal rate	● 2300rpm
Cooling	● On liquid
Swept volume	● 2970 cm3
Specific fuel consumption (maximum torque speed)	● 212 g/KWh
Max torque	● 380Nm@ 1100rpm
Torque reserve	● 21%
Tank capacity	● 70 liters
Engine bonnet	● SMC
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 24+12 synchronized
Gearbox control	● Mechanical with side levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Electro-hydraulic
Front axle	● 4-wheel drive engagement on the go
Front wheel drive coupling control	● Electro-hydraulic
Front wheel drive clutch	● Bath oil multiplates
Front differential lock	● NO-SPIN (Automatic)
Front axle swing	● 12°
Minimum speed	● 0,4 Km/h
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Rear braking	● Multiplates oil-bath, hydraulic control
Front braking type	● Synchronized 4-wheel drive in braking
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	○ Hydraulic control acting on main circuit
STEERING WHEEL	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 57°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate
Clutch control	● Mechanical with lever

DESCRIPTION	VALUE
Security	● PUSH & START device on PTO selector
FRONT PTO	
Type	○ Independent single shaft
Independent speed from the gearbox	○ 1000 rpm
Rotation way (looking at the pto)	○ Anticlockwise
Version	○ 6 grooves 1-3/8"
Clutch	○ Electro-hydraulic
Clutch control	○ Electric
REAR LIFTER	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 2500 Kg
Electronic Rear Lift	○
3-points hitch	● Category 1 and 2
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	○ Category 1 and 2 / 1 and 2 with fast connection
Type of lower arms	● Telescopic with quick connection
Hydraulic right tie rod	●
FRONT LIFTER	
Type	○ Up and down
Lifting capacity at the rear arms	○ 1200 Kg
3-points hitch	○ Category 1
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● Double pump, 38 + 61 liters per minute
Rear hydraulic scv	● N.3 in 1 single block
Optional rear hydraulic SCVs	○ 1 meccanico (con diverter) o 2 elettronici (solo con sollevatore elettronico)
Front hydraulic scv	— 3 electronic
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 850A 95Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	● Orange
OPERATING POSITION	
Platform	● Integral platform
Platform support	● Variable deformation silicone ● Silent-Block
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni Overview
Low profile cab	○ Goldoni LowProfile
Rear-view mirrors, LH and RH side	● Adjustable
Seat	● On spring suspension, with seat belt and OPS
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
STANDARD CAB FITTING OUT	
Side doors	● With bar, gas spring, key closing

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

DESCRIPTION	VALUE
Cab air filter dust-repellent	● Paper
Front glass	● Openable
Rear glass	● Openable
Front wiper	● 1 speed
Rear wiper	● 1 speed
Front windscreen washer	● 0,5 litres
Rear-view mirror right/left	● Adjustable and lockable
Window shade	● Height adjustable
Rotating lamp set up	● Switch in cab and external bayonet coupling
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	● 2
Rear working light	● 2
Radio set up	● Radio and speakers housing
LOW AND SUPER LOW PROFILE CAB TRIM	
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper
Front glass	● Heat-absorbing fixed
Rear glass	● Openable
Front wiper	● 1 speed
Rotating lamp	○
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	-
Rear working light	● 2
Radio set up	-
TOWING DEVICES	
Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable
SLIDER Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable, slider type
Front tow hook	● Fix
Draw bar	○ Swinging, category CEE/CEE-X
WEIGHTS	
Front	○ 204Kg 6 pieces 34Kg each
By tyre filled with water	● With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1925 mm
Length with ballast	● 3681 - 3781 mm
Length without ballast	● 3421 - 3521 mm
Width (min-max)	● 1170 - 1878 mm
Height with ROPS (min-max)	● 2170 - 2245 mm
Height with Standard Cab (min-max)	● 2075 - 2150 mm
Height with Super Low Profile cab (min-max)	● 1804 - 1879 mm
Height on grille bonnet (min-max)	● 1134 - 1185 mm
Height at steering wheel (min-max)	● 1204 - 1330 mm
Height at seat (min-max)	● 852 - 1186 mm
Height at rear mudguard (min-max)	● 1075 - 1119 mm
Bonnet height	● 1250 - 1325 mm
Ground clearance (min-max)	● 172 - 247 mm
Distance between insides of tyres	● 716-1115 mm
Minimum turning radius (internal)	○ 2,83 m
Weight with roll-bar	● 2275 Kg
Weight with Standard cab	● 2425 Kg
Weight with super low profile cab	● 2540 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	

DESCRIPTION	VALUE
Set of wheels Rear 340/65R20 Front 280/70R16	Min. width 1447mm; Height ● 2170mm; Ground clearance 172mm
Set of wheels Rear 360/70R20 Front 280/70R18	Min. width 1464mm; Height ● 2220mm; Ground clearance 222mm
Set of wheels Rear 420/65R20 Front 320/65R18	Min. width 1552mm; Height ● 2220mm; Ground clearance 222mm
STANDARD CAB VERSION TYRES AND DIMENSION	
Set of wheels Rear 340/65R20 Front 280/70R16	Min. width 1447mm; Height ● 2039mm; Ground clearance 172mm
Set of wheels Rear 360/70R20 Front 280/70R18	Min. width 1464mm; Height ● 2089mm; Ground clearance 222mm
Set of wheels Rear 420/65R20 Front 320/65R18	Min. width 1552mm; Height ● 2089mm; Ground clearance 222mm
SUPER LOW PROFILE CAB VERSION TYRES AND DIMENSIONS	
Set of wheels Rear 340/65R20 Front 280/70R16	Min. width 1447mm; Height ● 1804mm; Ground clearance 172mm
Set of wheels Rear 360/70R20 Front 280/70R18	Min. width 1464mm; Height ● 1854mm; Ground clearance 222mm
Set of wheels Rear 420/65R20 Front 320/65R18	Min. width 1552mm; Height ● 1854mm; Ground clearance 222mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01093616- 1	Q110 - Roll-bar	€ 54,397
	01093611- 1	Q110 - Standard cab	€ 61,086
	01093609- 1	Q110 - Standard cab with ELECTRONIC REAR LIFT <ul style="list-style-type: none"> • 2 electronic rear SCVs included 	€ 63,272
	01093622- 1	Q110 - Low Profile cab	€ 63,558
	01093620- 1	Q110 - Low Profile cab with ELECTRONIC REAR LIFT <ul style="list-style-type: none"> • 2 electronic rear SCVs included 	€ 65,744
Wheels			
	01800856- 1	Set of wheels Rear 340/65R20 Front 280/70R16	€ 2,716
	01800577- 1	Set of wheels Rear 360/70R20 Front 280/70R18	€ 3,130
	01800904- 1	Set of wheels Rear 420/65R20 Front 320/65R18	€ 3,448
Towing devices			
	01730509- 1	Rear tow hook category CEE-X D.28	€ 228
	01730510- 1	Rear tow hook category CEE-X D.28, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded 	€ 266
	01730511- 1	Rear tow hook category CEE D.31	€ 329
	01730512- 1	Rear tow hook category CEE D.31, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded 	€ 329
	01730516- 1	Rear tow hook category CEE-Y D.43 <ul style="list-style-type: none"> • Mandatory with Hydraulic Trailer Brake 	€ 361
	01730517- 1	Rear tow hook category CEE-Y D.43, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded • Mandatory with Hydraulic Trailer Brake 	€ 361
	01730513- 1	Swinging drawbar cat. CEE-D31	€ 392
	01730514- 1	Swinging drawbar category CEE-X D.28	€ 392
	01730515- 1	Sliding tow hook guides, SLIDER type	€ 266
Documentation language			
	01700310- 1	Documentation - Italian version	€ 0
	01700311- 1	Documentation - English version	€ 0
	01700312- 1	Documentation - French version	€ 0
	01700313- 1	Documentation - German version	€ 0
	01700314- 1	Documentation - Spanish version	€ 0
	01700330- 1	Documentation - Portuguese version	€ 0
	01700331- 1	Documentation - Slovenian version	€ 0
	01700332- 1	Documentation - Croatian version	€ 0
	01700415- 1	Documentation - Czech version	€ 0
	01700413- 1	Documentation - Greek version	€ 0
	01700416- 1	Documentation - Polish version	€ 0
	01700414- 1	Documentation - Hebrew version	€ 0
	01700464- 1	Documentation - Hungarian version	€ 0
	01700535- 1	Documentation - Romanian version	€ 0
OPTIONAL			
Lifters			

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

PRICE LIST

	PART NUMBER	DESCRIPTION	€
	01640313- 1	Front up and down lifter <ul style="list-style-type: none"> • 01640313 • For rear SCV • Including pair of front lift arms, cat. 1 • Front PTO Mandatory 	€ 2,652
	01640315- 1	Hydraulic registration for the rear arm 3rd point, 1-2 category <ul style="list-style-type: none"> • 01640315 • Diverter required with mechanical rear lift 	€ 446
	01640316- 1	Hydraulic registration for the 3rd point rear arm, with quick connection <ul style="list-style-type: none"> • Diverter required with mechanical rear lift • 01640316 	€ 584
Power take off			
	01950078- 1	Front power take off 1000 rpm <ul style="list-style-type: none"> • 01950078 	€ 3,555
Diverter			
	01640317- 1	Diverter on STD/DE <ul style="list-style-type: none"> • 01640317 • For mechanical lift 	€ 372
Weights			
	01800882- 1	Front weight set kg.34x6(tot. 204Kg)	€ 801
Hydraulic trailer braking system			
	01640324- 1 01640375- 1	Hydraulic trailer braking system CUNA type (Italy) <ul style="list-style-type: none"> • For Italy only • 01640375 	€ 1,125
	01640324- 1 01640376- 1	Hydraulic trailer braking system MOTHER REGULATION type <ul style="list-style-type: none"> • 01640376 	€ 1,623
Electrical fittings			
	01900134- 1	Adjustable rear worklight <ul style="list-style-type: none"> • 01900134 • Not available on cab versions 	€ 106
	01900135- 1	Rotating lamp for roll bar <ul style="list-style-type: none"> • Mandatory 	€ 74
	01900136- 1	Rotating lamp for standard cab <ul style="list-style-type: none"> • Mandatory 	€ 74
	01900137- 1	Rotating lamp for Low Profile cab <ul style="list-style-type: none"> • Mandatory 	€ 74



- + STAGE 3B**
- + GEARBOX 24+12 SYNCHRONIZED**
- + HYDRAULIC CIRCUIT 39+61 LITRES**
- + PERFECT WEIGHT BALANCE**
- + GREAT VERSATILITY: S, MANEUVERABLE AND AGILE - S GT, SOLID AND COMPACT**
- + COMFORTABLE DRIVING: PLATFORM SUSPENDED ON "SILENT BLOCKS" AND STANDARD CAB WITH A/C**

A "little" machine for orchards and vineyards with more than 100 horsepower? The S series (turbo intercooler, four-wheel drive, platform mounted on silent-blocks and a cab with a 360-degree view and air conditioning) will give you no cause to wish for a larger tractor. Balanced, compact, tough and tireless, these are the ideal companions for working worry-free, and there are 6 versions, so that you can find one that EXACTLY suits your needs.

NOTES

PRICE LIST
TECHNICAL FEATURES

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
MODEL	
Type	● Specialized tractor
Structure	● Self supporting integral
Version	● Low
ENGINE	
Trademark	● VM
Model	● R754 IE417
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 67 KW / 91,1 HP
Legislation on emission	● STAGE 3B
Number of cylinders	● 4
Aspiration	● Intercooler turbocharged
Nominal rate	● 2300rpm
Cooling	● On liquid
Swept volume	● 2970 cm3
Specific fuel consumption (maximum torque speed)	● 212 g/KWh
Max torque	● 380Nm@ 1100rpm
Torque reserve	● 34%
Tank capacity	● 70 liters
Engine bonnet	● SMC
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 24+12 synchronized
Gearbox control	● Mechanical with side levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Electro-hydraulic
Front axle	● 4-wheel drive engagement on the go
Front wheel drive coupling control	● Electro-hydraulic
Front wheel drive clutch	● Bath oil multiplates
Front differential lock	● NO-SPIN (Automatic)
Front axle swing	● 12°
Minimum speed	● 0,4 Km/h
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Rear braking	● Multiplates oil-bath, hydraulic control
Front braking type	● Synchronized 4-wheel drive in braking
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	○ Hydraulic control acting on main circuit
STEERING WHEEL	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 57°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate
Clutch control	● Mechanical with lever

DESCRIPTION	VALUE
Security	● PUSH & START device on PTO selector
FRONT PTO	
Type	○ Independent single shaft
Independent speed from the gearbox	○ 1000 rpm
Rotation way (looking at the pto)	○ Anticlockwise
Version	○ 6 grooves 1-3/8"
Clutch	○ Electro-hydraulic
Clutch control	○ Electric
REAR LIFTER	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 2500 Kg
Electronic Rear Lift	○
3-points hitch	● Category 1 and 2
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	○ Category 1 and 2 / 1 and 2 with fast connection
Type of lower arms	● Telescopic with quick connection
Hydraulic right tie rod	●
FRONT LIFTER	
Type	○ Up and down
Lifting capacity at the rear arms	○ 1200 Kg
3-points hitch	○ Category 1
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● Double pump, 38 + 61 liters per minute
Rear hydraulic scv	● N.3 in 1 single block
Optional rear hydraulic SCVs	○ 1 meccanico (con diverter) o 2 elettronici (solo con sollevatore elettronico)
Front hydraulic scv	— 3 electronic
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 850A 95Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	● Orange
OPERATING POSITION	
Platform	● Integral platform
Platform support	● Variable deformation silicone ● Silent-Block
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni Overview
Rear-view mirrors, LH and RH side	● Adjustable
Seat	● On spring suspension, with seat belt and OPS
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
STANDARD CAB FITTING OUT	
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

DESCRIPTION	VALUE
Front glass	● Openable
Rear glass	● Openable
Front wiper	● 1 speed
Rear wiper	● 1 speed
Front windscreen washer	● 0,5 litres
Rear-view mirror right/left	● Adjustable and lockable
Window shade	● Height adjustable
Rotating lamp set up	● Switch in cab and external bayonet coupling
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	● 2
Rear working light	● 2
Radio set up	● Radio and speakers housing
TOWING DEVICES	
Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable
SLIDER Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable, slider type
Front tow hook	● Fix
Draw bar	○ Swinging, category CEE/CEE-X
WEIGHTS	
Front	○ 204Kg 6 pieces 34Kg each
By tyre filled with water	● With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1973 mm
Width (min-max)	● 1190 - 1878 mm
Height with ROPS (min-max)	● 2243 - 2293mm
Height with Standard Cab (min-max)	● 2156,5 - 2206.5 mm
Height on grille bonnet (min-max)	● 1185 - 1235mm
Height at steering wheel (min-max)	● 1315 - 1365mm
Height at seat (min-max)	● 995 - 1045mm
Height at rear mudguard (min-max)	● 1190 - 1240mm
Bonnet height	● 1323 - 1373 mm
Ground clearance (min-max)	● 242 - 292mm
Distance between insides of tyres	● 742 - 1090mm
Minimum turning radius (internal)	● 3,0 m
Weight with roll-bar	● 2375 Kg
Weight with Standard cab	● 2610 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear 320/70R24 Front 240/70R16	Min. width 1404mm; Height ● 2243mm; Ground clearance 242mm
Set of rear tyres 380/70R24 Front 280/70R16	Min. width 1482mm; Height ● 2293mm; Ground clearance 292mm
Set of wheels Rear 360/70R24 Front 260/70R16	Min. width 1462mm; Height ● 2268mm; Ground clearance 267mm
Set of wheels Rear 380/70R20 Front 240/70R16	Min. width 1524mm; Height ● 2243mm; Ground clearance 242mm
STANDARD CAB VERSION TYRES AND DIMENSION	
Set of wheels Rear 320/70R24 Front 240/70R16	Min. width 1404mm; Height ● 2156mm; Ground clearance 242mm
Set of wheels Rear 360/70R24 Front 260/70R16	Min. width 1462mm; Height ● 2181mm; Ground clearance 267mm
Set of wheels Rear 380/70R20 Front 240/70R16	Min. width 1524mm; Height ● 2156mm; Ground clearance 242mm

DESCRIPTION	VALUE
Set of wheels Rear 380/70R24 Front 280/70R16	Min. width 1482mm; Height ● 2206mm; Ground clearance 292mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

**S100**

Specialized Tractors

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01093551- 1	S100 - Roll-bar	€ 49,229
	01093545- 1	S100 - Cab	€ 56,284
	01093547- 1	S100 - Cab with Electronic Rear Lift <ul style="list-style-type: none"> • 2 electronic rear SCVs included 	€ 58,469
Wheels			
	01800860- 1	Set of wheels Rear 320/70R24 Front 240/70R16	€ 2,600
	01800579- 1	Set of wheels Rear 360/70R24 Front 260/70R16	€ 3,024
	01800907- 1	Set of wheels Rear 380/70R20 Front 240/70R16	€ 3,098
	01800578- 1	Set of wheels Rear 380/70R24 Front 280/70R16	€ 3,267
Towing devices			
	01730509- 1	Rear tow hook category CEE-X D.28	€ 228
	01730510- 1	Rear tow hook category CEE-X D.28, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded 	€ 266
	01730511- 1	Rear tow hook category CEE D.31	€ 329
	01730512- 1	Rear tow hook category CEE D.31, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded 	€ 329
	01730516- 1	Rear tow hook category CEE-Y D.43 <ul style="list-style-type: none"> • Mandatory with Hydraulic Trailer Brake 	€ 361
	01730517- 1	Rear tow hook category CEE-Y D.43, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded • Mandatory with Hydraulic Trailer Brake 	€ 361
	01730513- 1	Swinging drawbar cat. CEE-D31	€ 392
	01730514- 1	Swinging drawbar category CEE-X D.28	€ 392
	01730515- 1	Sliding tow hook guides, SLIDER type	€ 266
Documentation language			
	01700310- 1	Documentation - Italian version	€ 0
	01700311- 1	Documentation - English version	€ 0
	01700312- 1	Documentation - French version	€ 0
	01700313- 1	Documentation - German version	€ 0
	01700314- 1	Documentation - Spanish version	€ 0
	01700330- 1	Documentation - Portuguese version	€ 0
	01700331- 1	Documentation - Slovenian version	€ 0
	01700332- 1	Documentation - Croatian version	€ 0
	01700415- 1	Documentation - Czech version	€ 0
	01700413- 1	Documentation - Greek version	€ 0
	01700416- 1	Documentation - Polish version	€ 0
	01700414- 1	Documentation - Hebrew version	€ 0
	01700464- 1	Documentation - Hungarian version	€ 0
	01700535- 1	Documentation - Romanian version	€ 0
OPTIONAL			
Lifters			

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

PRICE LIST

	PART NUMBER	DESCRIPTION	€
	01640313- 1	Front up and down lifter <ul style="list-style-type: none"> • 01640313 • For rear SCV • Including pair of front lift arms, cat. 1 • Front PTO Mandatory 	€ 2,652
	01640315- 1	Hydraulic registration for the rear arm 3rd point, 1-2 category <ul style="list-style-type: none"> • 01640315 • Diverter required with mechanical rear lift 	€ 446
	01640316- 1	Hydraulic registration for the 3rd point rear arm, with quick connection <ul style="list-style-type: none"> • Diverter required with mechanical rear lift • 01640316 	€ 584
Power take off			
	01950078- 1	Front power take off 1000 rpm <ul style="list-style-type: none"> • 01950078 	€ 3,555
Diverter			
	01640317- 1	Diverter on STD/DE <ul style="list-style-type: none"> • 01640317 • For mechanical lift 	€ 372
Weights			
	01800882- 1	Front weight set kg.34x6(tot. 204Kg)	€ 801
Hydraulic trailer braking system			
	01640324- 1 01640375- 1	Hydraulic trailer braking system CUNA type (Italy) <ul style="list-style-type: none"> • For Italy only • 01640375 	€ 1,125
	01640324- 1 01640376- 1	Hydraulic trailer braking system MOTHER REGULATION type <ul style="list-style-type: none"> • 01640376 	€ 1,623
Front mudguard			
	01810038- 1	Pair of front mudguard	€ 446
Electrical fittings			
	01900134- 1	Adjustable rear worklight <ul style="list-style-type: none"> • 01900134 • Not available on cab versions 	€ 106
	01900135- 1	Rotating lamp for roll bar <ul style="list-style-type: none"> • Mandatory 	€ 74
	01900136- 1	Rotating lamp for standard cab <ul style="list-style-type: none"> • Mandatory 	€ 74



- + STAGE 3B**
- + GEARBOX 24+12 SYNCHRONIZED**
- + HYDRAULIC CIRCUIT 39+61 LITRES**
- + PERFECT WEIGHT BALANCE**
- + GREAT VERSATILITY: S, MANEUVERABLE AND AGILE - S GT, SOLID AND COMPACT**
- + COMFORTABLE DRIVING: PLATFORM SUSPENDED ON "SILENT BLOCKS" AND STANDARD CAB WITH A/C**

A "little" machine for orchards and vineyards with more than 100 horsepower? The S series (turbo intercooler, four-wheel drive, platform mounted on silent-blocks and a cab with a 360-degree view and air conditioning) will give you no cause to wish for a larger tractor. Balanced, compact, tough and tireless, these are the ideal companions for working worry-free, and there are 6 versions, so that you can find one that EXACTLY suits your needs.

NOTES

PRICE LIST
TECHNICAL FEATURES

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
MODEL	
Type	● Specialized tractor
Structure	● Self supporting integral
Version	● Low
ENGINE	
Trademark	● VM
Model	● R754 IE417
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 76 KW / 102 hp
Legislation on emission	● STAGE 3B
Number of cylinders	● 4
Aspiration	● Intercooler turbocharged
Nominal rate	● 2300rpm
Cooling	● On liquid
Swept volume	● 2970 cm3
Specific fuel consumption (maximum torque speed)	● 212 g/KWh
Max torque	● 380Nm@ 1100rpm
Torque reserve	● 21%
Tank capacity	● 70 liters
Engine bonnet	● SMC
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 24+12 synchronized
Gearbox control	● Mechanical with side levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Electro-hydraulic
Front axle	● 4-wheel drive engagement on the go
Front wheel drive coupling control	● Electro-hydraulic
Front wheel drive clutch	● Bath oil multiplates
Front differential lock	● NO-SPIN (Automatic)
Front axle swing	● 12°
Minimum speed	● 0,4 Km/h
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Rear braking	● Multiplates oil-bath, hydraulic control
Front braking type	● Synchronized 4-wheel drive in braking
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	○ Hydraulic control acting on main circuit
STEERING WHEEL	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 57°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate
Clutch control	● Mechanical with lever

DESCRIPTION	VALUE
Security	● PUSH & START device on PTO selector
FRONT PTO	
Type	○ Independent single shaft
Independent speed from the gearbox	○ 1000 rpm
Rotation way (looking at the pto)	○ Anticlockwise
Version	○ 6 grooves 1-3/8"
Clutch	○ Electro-hydraulic
Clutch control	○ Electric
REAR LIFTER	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 2500 Kg
Electronic Rear Lift	○
3-points hitch	● Category 1 and 2
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	○ Category 1 and 2 / 1 and 2 with fast connection
Type of lower arms	● Telescopic with quick connection
Hydraulic right tie rod	●
FRONT LIFTER	
Type	○ Up and down
Lifting capacity at the rear arms	○ 1200 Kg
3-points hitch	○ Category 1
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● Double pump, 38 + 61 liters per minute
Rear hydraulic scv	● N.3 in 1 single block
Optional rear hydraulic SCVs	○ 1 meccanico (con diverter) o 2 elettronici (solo con sollevatore elettronico)
Front hydraulic scv	— 3 electronic
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 850A 95Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	● Orange
OPERATING POSITION	
Platform	● Integral platform
Platform support	● Variable deformation silicone ● Silent-Block
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni Overview
Rear-view mirrors, LH and RH side	● Adjustable
Seat	● On spring suspension, with seat belt and OPS
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
STANDARD CAB FITTING OUT	
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

DESCRIPTION	VALUE
Front glass	● Openable
Rear glass	● Openable
Front wiper	● 1 speed
Rear wiper	● 1 speed
Front windscreen washer	● 0,5 litres
Rear-view mirror right/left	● Adjustable and lockable
Window shade	● Height adjustable
Rotating lamp set up	● Switch in cab and external bayonet coupling
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	● 2
Rear working light	● 2
Radio set up	● Radio and speakers housing
TOWING DEVICES	
Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable
SLIDER Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable, slider type
Front tow hook	● Fix
Draw bar	○ Swinging, category CEE/CEE-X
WEIGHTS	
Front	○ 204Kg 6 pieces 34Kg each
By tyre filled with water	● With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	● 1973 mm
Length with ballast	● 3721 - 3821 mm
Length without ballast	● 3471 - 3571 mm
Width (min-max)	● 1447 - 1837 mm
Height with ROPS (min-max)	● 2243 - 2293mm
Height with Standard Cab (min-max)	● 2229 - 2270 mm
Height on grille bonnet (min-max)	● 1185 - 1235mm
Height at steering wheel (min-max)	● 1315 - 1365mm
Height at seat (min-max)	● 1195 - 1238 mm
Height at rear mudguard (min-max)	● 1190 - 1240mm
Bonnet height	● 1323 - 1373 mm
Ground clearance (min-max)	● 242 - 292mm
Distance between insides of tyres	● 742 - 1090mm
Minimum turning radius (internal)	● 3,0 m
Weight with roll-bar	● 2375 Kg
Weight with Standard cab	● 2610 Kg
Weight with super low profile cab	● 2540 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of wheels Rear 320/70R24 Front 240/70R16	Min. width 1404mm; Height ● 2243mm; Ground clearance 242mm
Set of rear tyres 380/70R24 Front 280/70R16	Min. width 1482mm; Height ● 2293mm; Ground clearance 292mm
Set of wheels Rear 360/70R24 Front 260/70R16	Min. width 1462mm; Height ● 2268mm; Ground clearance 267mm
Set of wheels Rear 380/70R20 Front 240/70R16	Min. width 1524mm; Height ● 2243mm; Ground clearance 242mm
STANDARD CAB VERSION TYRES AND DIMENSION	
Set of wheels Rear 320/70R24 Front 240/70R16	Min. width 1404mm; Height ● 2156mm; Ground clearance 242mm
Set of wheels Rear 360/70R24 Front 260/70R16	Min. width 1462mm; Height ● 2181mm; Ground clearance 267mm

DESCRIPTION	VALUE
Set of wheels Rear 380/70R20 Front 240/70R16	Min. width 1524mm; Height ● 2156mm; Ground clearance 242mm
Set of wheels Rear 380/70R24 Front 280/70R16	Min. width 1482mm; Height ● 2206mm; Ground clearance 292mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01093635- 1	S110 - Roll-bar	€ 52,319
	01093629- 1	S110 - Cab	€ 59,343
	01093631- 1	S110 - Cab with Electronic Rear Lift <ul style="list-style-type: none"> • 2 electronic rear SCVs included 	€ 61,529
Wheels			
	01800860- 1	Set of wheels Rear 320/70R24 Front 240/70R16	€ 2,600
	01800579- 1	Set of wheels Rear 360/70R24 Front 260/70R16	€ 3,024
	01800907- 1	Set of wheels Rear 380/70R20 Front 240/70R16	€ 3,098
	01800578- 1	Set of wheels Rear 380/70R24 Front 280/70R16	€ 3,267
Towing devices			
	01730509- 1	Rear tow hook category CEE-X D.28	€ 228
	01730510- 1	Rear tow hook category CEE-X D.28, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded 	€ 266
	01730511- 1	Rear tow hook category CEE D.31	€ 329
	01730512- 1	Rear tow hook category CEE D.31, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded 	€ 329
	01730516- 1	Rear tow hook category CEE-Y D.43 <ul style="list-style-type: none"> • Mandatory with Hydraulic Trailer Brake 	€ 361
	01730517- 1	Rear tow hook category CEE-Y D.43, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded • Mandatory with Hydraulic Trailer Brake 	€ 361
	01730513- 1	Swinging drawbar cat. CEE-D31	€ 392
	01730514- 1	Swinging drawbar category CEE-X D.28	€ 392
	01730515- 1	Sliding tow hook guides, SLIDER type	€ 266
Documentation language			
	01700310- 1	Documentation - Italian version	€ 0
	01700311- 1	Documentation - English version	€ 0
	01700312- 1	Documentation - French version	€ 0
	01700313- 1	Documentation - German version	€ 0
	01700314- 1	Documentation - Spanish version	€ 0
	01700330- 1	Documentation - Portuguese version	€ 0
	01700331- 1	Documentation - Slovenian version	€ 0
	01700332- 1	Documentation - Croatian version	€ 0
	01700415- 1	Documentation - Czech version	€ 0
	01700413- 1	Documentation - Greek version	€ 0
	01700416- 1	Documentation - Polish version	€ 0
	01700414- 1	Documentation - Hebrew version	€ 0
	01700464- 1	Documentation - Hungarian version	€ 0
	01700535- 1	Documentation - Romanian version	€ 0
OPTIONAL			
Lifters			

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

PRICE LIST

	PART NUMBER	DESCRIPTION	€
	01640313- 1	Front up and down lifter <ul style="list-style-type: none"> • 01640313 • For rear SCV • Including pair of front lift arms, cat. 1 • Front PTO Mandatory 	€ 2,652
	01640315- 1	Hydraulic registration for the rear arm 3rd point, 1-2 category <ul style="list-style-type: none"> • 01640315 • Diverter required with mechanical rear lift 	€ 446
	01640316- 1	Hydraulic registration for the 3rd point rear arm, with quick connection <ul style="list-style-type: none"> • Diverter required with mechanical rear lift • 01640316 	€ 584
Power take off			
	01950078- 1	Front power take off 1000 rpm <ul style="list-style-type: none"> • 01950078 	€ 3,555
Diverter			
	01640317- 1	Diverter on STD/DE <ul style="list-style-type: none"> • 01640317 • For mechanical lift 	€ 372
Weights			
	01800882- 1	Front weight set kg.34x6(tot. 204Kg)	€ 801
Hydraulic trailer braking system			
	01640324- 1 01640375- 1	Hydraulic trailer braking system CUNA type (Italy) <ul style="list-style-type: none"> • For Italy only • 01640375 	€ 1,125
	01640324- 1 01640376- 1	Hydraulic trailer braking system MOTHER REGULATION type <ul style="list-style-type: none"> • 01640376 	€ 1,623
Front mudguard			
	01810038- 1	Pair of front mudguard	€ 446
Electrical fittings			
	01900134- 1	Adjustable rear worklight <ul style="list-style-type: none"> • 01900134 • Not available on cab versions 	€ 106
	01900135- 1	Rotating lamp for roll bar <ul style="list-style-type: none"> • Mandatory 	€ 74
	01900136- 1	Rotating lamp for standard cab <ul style="list-style-type: none"> • Mandatory 	€ 74



- + STAGE 3B**
- + GEARBOX 24+12 SYNCHRONIZED**
- + HYDRAULIC CIRCUIT 39+61 LITRES**
- + PERFECT WEIGHT BALANCE**
- + GREAT VERSATILITY: S, MANEUVERABLE AND AGILE - S GT, SOLID AND COMPACT**
- + COMFORTABLE DRIVING: PLATFORM SUSPENDED ON "SILENT BLOCKS" AND STANDARD CAB WITH A/C**

A "little" machine for orchards and vineyards with more than 100 horsepower? The S series (turbo intercooler, four-wheel drive, platform mounted on silent-blocks and a cab with a 360-degree view and air conditioning) will give you no cause to wish for a larger tractor. Balanced, compact, tough and tireless, these are the ideal companions for working worry-free, and there are 6 versions, so that you can find one that EXACTLY suits your needs.

NOTES



PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
MODEL	
Type	● Specialized tractor
Structure	● Self supporting integral
Version	● High
ENGINE	
Trademark	● VM
Model	● R754 IE417
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 67 KW / 91,1 HP
Legislation on emission	● STAGE 3B
Number of cylinders	● 4
Aspiration	● Intercooler turbocharged
Nominal rate	● 2300rpm
Cooling	● On liquid
Swept volume	● 2970 cm3
Specific fuel consumption (maximum torque speed)	● 212 g/KWh
Max torque	● 380Nm@ 1100rpm
Torque reserve	● 34%
Tank capacity	● 70 liters
Engine bonnet	● SMC
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 24+12 synchronized
Gearbox control	● Mechanical with side levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Electro-hydraulic
Front axle	● 4-wheel drive engagement on the go
Front wheel drive coupling control	● Electro-hydraulic
Front wheel drive clutch	● Bath oil multiplates
Front differential lock	● NO-SPIN (Automatic)
Front axle swing	● 12°
Minimum speed	● 0,4 Km/h
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Rear braking	● Multiplates oil-bath, hydraulic control
Front braking type	● Synchronized 4-wheel drive in braking
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	○ Hydraulic control acting on main circuit
STEERING WHEEL	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 57°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate
Clutch control	● Mechanical with lever

DESCRIPTION	VALUE
Security	● PUSH & START device on PTO selector
FRONT PTO	
Type	○ Independent single shaft
Independent speed from the gearbox	○ 1000 rpm
Rotation way (looking at the pto)	○ Anticlockwise
Version	○ 6 grooves 1-3/8"
Clutch	○ Electro-hydraulic
Clutch control	○ Electric
REAR LIFTER	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 2500 Kg
Electronic Rear Lift	○
3-points hitch	● Category 1 and 2
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	○ Category 1 and 2 / 1 and 2 with fast connection
Type of lower arms	● Telescopic with quick connection
Hydraulic right tie rod	●
FRONT LIFTER	
Type	○ Up and down
Lifting capacity at the rear arms	○ 1200 Kg
3-points hitch	● Category 1
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● Double pump, 38 + 61 liters per minute
Rear hydraulic scv	● N.3 in 1 single block
Optional rear hydraulic SCVs	○ 1 meccanico (con diverter) ○ 2 elettronici (solo con sollevatore elettronico)
Front hydraulic scv	— 3 electronic
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 850A 95Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	● Orange
OPERATING POSITION	
Platform	● Integral platform
Platform support	● Variable deformation silicone ● Silent-Block
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni Overview
Rear-view mirrors, LH and RH side	● Adjustable
Seat	● On spring suspension, with seat belt and OPS
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
STANDARD CAB FITTING OUT	
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

DESCRIPTION	VALUE
Front glass	• Openable
Rear glass	• Openable
Front wiper	• 1 speed
Rear wiper	• 1 speed
Front windscreen washer	• 0,5 litres
Rear-view mirror right/left	• Adjustable and lockable
Window shade	• Height adjustable
Rotating lamp set up	• Switch in cab and external bayonet coupling
Heating and ventilation system	• Electro-ventilated
Air conditioning	• Fan-electric condenser on the cab roof
Front working light	• 2
Rear working light	• 2
Radio set up	• Radio and speakers housing
TOWING DEVICES	
Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable
SLIDER Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable, slider type
Front tow hook	• Fix
Draw bar	○ Swinging, category CEE/CEE-X
WEIGHTS	
Front	○ 204Kg 6 pieces 34Kg each
By tyre filled with water	• With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	• 1992mm
Width (min-max)	• 1487 - 1943 mm
Height with ROPS (min-max)	• 2378 - 2403 mm
Height with Standard Cab (min-max)	• 2331 - 2367 mm
Height on grille bonnet (min-max)	• 1246 - 1263 mm
Height at steering wheel (min-max)	• 1425 - 1450mm
Height at seat (min-max)	• 1297 - 1335 mm
Height at rear mudguard (min-max)	• 1300 - 1325mm
Bonnet height	• 1433 - 1458 mm
Ground clearance (min-max)	• 352 - 377mm
Distance between insides of tyres	• 609 - 1221 mm
Minimum turning radius (internal)	• 3,0 m
Weight with roll-bar	• 2375 Kg
Weight with Standard cab	• 2610 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of rear tyres 380/70R24 Front 280/70R16	Min. width 1482mm; Height • 2353mm; Ground clearance 352mm
Set of wheels Rear 420/70R24 Front 280/70R18	Min. width 1462mm; Height • 2378mm; Ground clearance 377mm
Set of wheels Rear 360/70R28 Front 280/70R18	Min. width 1404mm; Height • 2378mm; Ground clearance 377mm
STANDARD CAB VERSION TYRES AND DIMENSION	
Set of wheels Rear 380/70R24 Front 280/70R16	Min. width 1482mm; Height • 2266mm; Ground clearance 352mm
Set of wheels Rear 420/70R24 Front 280/70R18	Min. width 1462mm; Height • 2291,5mm; Ground clearance 377mm
Set of wheels Rear 360/70R28 Front 280/70R18	Min. width 1404mm; Height • 2291,5mm; Ground clearance 377mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01093563- 1	S100 GT - Roll-bar	€ 49,795
	01093556- 1	S100 GT - Cab	€ 56,902
	01093558- 1	S100 GT - Cab with Electronic Rear Lift <ul style="list-style-type: none"> • 2 electronic rear SCVs included 	€ 59,088
Wheels			
	01800880- 1	Set of wheels Rear 360/70R28 Front 280/70R18	€ 3,947
	01800578- 1	Set of wheels Rear 380/70R24 Front 280/70R16	€ 3,267
	01800742- 1	Set of wheels Rear 420/70R24 Front 280/70R18	€ 3,585
Towing devices			
	01730509- 1	Rear tow hook category CEE-X D.28	€ 228
	01730510- 1	Rear tow hook category CEE-X D.28, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded 	€ 266
	01730511- 1	Rear tow hook category CEE D.31	€ 329
	01730512- 1	Rear tow hook category CEE D.31, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded 	€ 329
	01730516- 1	Rear tow hook category CEE-Y D.43 <ul style="list-style-type: none"> • Mandatory with Hydraulic Trailer Brake 	€ 361
	01730517- 1	Rear tow hook category CEE-Y D.43, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded • Mandatory with Hydraulic Trailer Brake 	€ 361
	01730513- 1	Swinging drawbar cat. CEE-D31	€ 392
	01730514- 1	Swinging drawbar category CEE-X D.28	€ 392
	01730515- 1	Sliding tow hook guides, SLIDER type	€ 266
Documentation language			
	01700310- 1	Documentation - Italian version	€ 0
	01700311- 1	Documentation - English version	€ 0
	01700312- 1	Documentation - French version	€ 0
	01700313- 1	Documentation - German version	€ 0
	01700314- 1	Documentation - Spanish version	€ 0
	01700330- 1	Documentation - Portuguese version	€ 0
	01700331- 1	Documentation - Slovenian version	€ 0
	01700332- 1	Documentation - Croatian version	€ 0
	01700415- 1	Documentation - Czech version	€ 0
	01700413- 1	Documentation - Greek version	€ 0
	01700416- 1	Documentation - Polish version	€ 0
	01700414- 1	Documentation - Hebrew version	€ 0
	01700464- 1	Documentation - Hungarian version	€ 0
	01700535- 1	Documentation - Romanian version	€ 0

OPTIONAL

Lifters			
---------	--	--	--

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

PRICE LIST

	PART NUMBER	DESCRIPTION	€
	01640313- 1	Front up and down lifter <ul style="list-style-type: none"> • 01640313 • For rear SCV • Including pair of front lift arms, cat. 1 • Front PTO Mandatory 	€ 2,652
	01640315- 1	Hydraulic registration for the rear arm 3rd point, 1-2 category <ul style="list-style-type: none"> • 01640315 • Diverter required with mechanical rear lift 	€ 446
	01640316- 1	Hydraulic registration for the 3rd point rear arm, with quick connection <ul style="list-style-type: none"> • Diverter required with mechanical rear lift • 01640316 	€ 584
Power take off			
	01950078- 1	Front power take off 1000 rpm <ul style="list-style-type: none"> • 01950078 	€ 3,555
Diverter			
	01640317- 1	Diverter on STD/DE <ul style="list-style-type: none"> • 01640317 • For mechanical lift 	€ 372
Weights			
	01800882- 1	Front weight set kg.34x6(tot. 204Kg)	€ 801
Hydraulic trailer braking system			
	01640324- 1 01640375- 1	Hydraulic trailer braking system CUNA type (Italy) <ul style="list-style-type: none"> • For Italy only • 01640375 	€ 1,125
	01640324- 1 01640376- 1	Hydraulic trailer braking system MOTHER REGULATION type <ul style="list-style-type: none"> • 01640376 	€ 1,623
Front mudguard			
	01810039- 1	Pair of front mudguard	€ 446
Electrical fittings			
	01900134- 1	Adjustable rear worklight <ul style="list-style-type: none"> • 01900134 • Not available on cab versions 	€ 106
	01900135- 1	Rotating lamp for roll bar <ul style="list-style-type: none"> • Mandatory 	€ 74
	01900136- 1	Rotating lamp for standard cab <ul style="list-style-type: none"> • Mandatory 	€ 74



- + STAGE 3B**
- + GEARBOX 24+12 SYNCHRONIZED**
- + HYDRAULIC CIRCUIT 39+61 LITRES**
- + PERFECT WEIGHT BALANCE**
- + GREAT VERSATILITY: S, MANEUVERABLE AND AGILE - S GT, SOLID AND COMPACT**
- + COMFORTABLE DRIVING: PLATFORM SUSPENDED ON "SILENT BLOCKS" AND STANDARD CAB WITH A/C**

A "little" machine for orchards and vineyards with more than 100 horsepower? The S series (turbo intercooler, four-wheel drive, platform mounted on silent-blocks and a cab with a 360-degree view and air conditioning) will give you no cause to wish for a larger tractor. Balanced, compact, tough and tireless, these are the ideal companions for working worry-free, and there are 6 versions, so that you can find one that EXACTLY suits your needs.

NOTES



PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
MODEL	
Type	● Specialized tractor
Structure	● Self supporting integral
Version	● High
ENGINE	
Trademark	● VM
Model	● R754 IE417
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 76 KW / 102 hp
Legislation on emission	● STAGE 3B
Number of cylinders	● 4
Aspiration	● Intercooler turbocharged
Nominal rate	● 2300rpm
Cooling	● On liquid
Swept volume	● 2970 cm3
Specific fuel consumption (maximum torque speed)	● 212 g/KWh
Max torque	● 380Nm@ 1100rpm
Torque reserve	● 21%
Tank capacity	● 70 liters
Engine bonnet	● SMC
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 24+12 synchronized
Gearbox control	● Mechanical with side levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Electro-hydraulic
Front axle	● 4-wheel drive engagement on the go
Front wheel drive coupling control	● Electro-hydraulic
Front wheel drive clutch	● Bath oil multiplates
Front differential lock	● NO-SPIN (Automatic)
Front axle swing	● 12°
Minimum speed	● 0,4 Km/h
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Rear braking	● Multiplates oil-bath, hydraulic control
Front braking type	● Synchronized 4-wheel drive in braking
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	○ Hydraulic control acting on main circuit
STEERING WHEEL	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 57°
REAR PTO	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate
Clutch control	● Mechanical with lever

DESCRIPTION	VALUE
Security	● PUSH & START device on PTO selector
FRONT PTO	
Type	○ Independent single shaft
Independent speed from the gearbox	○ 1000 rpm
Rotation way (looking at the pto)	○ Anticlockwise
Version	○ 6 grooves 1-3/8"
Clutch	○ Electro-hydraulic
Clutch control	○ Electric
REAR LIFTER	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 2500 Kg
Electronic Rear Lift	○
3-points hitch	● Category 1 and 2
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	○ Category 1 and 2 / 1 and 2 with fast connection
Type of lower arms	● Telescopic with quick connection
Hydraulic right tie rod	●
FRONT LIFTER	
Type	○ Up and down
Lifting capacity at the rear arms	○ 1200 Kg
3-points hitch	● Category 1
HYDRAULIC SYSTEM	
Type	● Open center
Pump flow rate	● Double pump, 38 + 61 liters per minute
Rear hydraulic scv	● N.3 in 1 single block
Optional rear hydraulic SCVs	○ 1 meccanico (con diverter) ○ 2 elettronici (solo con sollevatore elettronico)
Front hydraulic scv	— 3 electronic
Free oil discharge	● Quick 1/2 NPTF
ELECTRICAL FITTINGS	
Battery	● 12V 850A 95Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	● Orange
OPERATING POSITION	
Platform	● Integral platform
Platform support	● Variable deformation silicone ● Silent-Block
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni Overview
Rear-view mirrors, LH and RH side	● Adjustable
Seat	● On spring suspension, with seat belt and OPS
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
STANDARD CAB FITTING OUT	
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

DESCRIPTION	VALUE
Front glass	• Openable
Rear glass	• Openable
Front wiper	• 1 speed
Rear wiper	• 1 speed
Front windscreen washer	• 0,5 litres
Rear-view mirror right/left	• Adjustable and lockable
Window shade	• Height adjustable
Rotating lamp set up	• Switch in cab and external bayonet coupling
Heating and ventilation system	• Electro-ventilated
Air conditioning	• Fan-electric condenser on the cab roof
Front working light	• 2
Rear working light	• 2
Radio set up	• Radio and speakers housing
TOWING DEVICES	
Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable
SLIDER Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable, slider type
Front tow hook	• Fix
Draw bar	○ Swinging, category CEE/CEE-X
WEIGHTS	
Front	○ 204Kg 6 pieces 34Kg each
By tyre filled with water	• With air / water valve
WEIGHTS AND DIMENSIONS	
Wheelbase	• 1992mm
Length with ballast	• 3750 - 3850 mm
Length without ballast	• 3490 - 3590 mm
Width (min-max)	• 1487 - 1943 mm
Height with ROPS (min-max)	• 2378 - 2403 mm
Height with Standard Cab (min-max)	• 2331 - 2367 mm
Height on grille bonnet (min-max)	• 1246 - 1263 mm
Height at steering wheel (min-max)	• 1425 - 1450mm
Height at seat (min-max)	• 1297 - 1335 mm
Height at rear mudguard (min-max)	• 1300 - 1325mm
Bonnet height	• 1433 - 1458 mm
Ground clearance (min-max)	• 352 - 377mm
Distance between insides of tyres	• 609 - 1221 mm
Minimum turning radius (internal)	• 3,0 m
Weight with roll-bar	• 2375 Kg
Weight with Standard cab	• 2610 Kg
WHEELS AND DIMENSIONS ROLL BAR VERSION	
Set of rear tyres 380/70R24 Front 280/70R16	Min. width 1482mm; Height • 2353mm; Ground clearance 352mm
Set of wheels Rear 420/70R24 Front 280/70R18	Min. width 1462mm; Height • 2378mm; Ground clearance 377mm
Set of wheels Rear 360/70R28 Front 280/70R18	Min. width 1404mm; Height • 2378mm; Ground clearance 377mm
STANDARD CAB VERSION TYRES AND DIMENSION	
Set of wheels Rear 380/70R24 Front 280/70R16	Min. width 1482mm; Height • 2266mm; Ground clearance 352mm
Set of wheels Rear 420/70R24 Front 280/70R18	Min. width 1462mm; Height • 2291,5mm; Ground clearance 377mm
Set of wheels Rear 360/70R28 Front 280/70R18	Min. width 1404mm; Height • 2291,5mm; Ground clearance 377mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01093652- 1	S110 GT - Roll-bar	€ 0
	01093641- 1	S110 GT - Cab	€ 60,023
	01093644- 1	S110 GT - Cab with Electronic Rear Lift <ul style="list-style-type: none"> • 2 electronic rear SCVs included 	€ 62,209
Wheels			
	01800880- 1	Set of wheels Rear 360/70R28 Front 280/70R18	€ 3,947
	01800578- 1	Set of wheels Rear 380/70R24 Front 280/70R16	€ 3,267
	01800742- 1	Set of wheels Rear 420/70R24 Front 280/70R18	€ 3,585
Towing devices			
	01730509- 1	Rear tow hook category CEE-X D.28	€ 228
	01730510- 1	Rear tow hook category CEE-X D.28, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded 	€ 266
	01730511- 1	Rear tow hook category CEE D.31	€ 329
	01730512- 1	Rear tow hook category CEE D.31, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded 	€ 329
	01730516- 1	Rear tow hook category CEE-Y D.43 <ul style="list-style-type: none"> • Mandatory with Hydraulic Trailer Brake 	€ 361
	01730517- 1	Rear tow hook category CEE-Y D.43, SLIDER type <ul style="list-style-type: none"> • Tow hook guides demanded • Mandatory with Hydraulic Trailer Brake 	€ 361
	01730513- 1	Swinging drawbar cat. CEE-D31	€ 392
	01730514- 1	Swinging drawbar category CEE-X D.28	€ 392
	01730515- 1	Sliding tow hook guides, SLIDER type	€ 266
Documentation language			
	01700310- 1	Documentation - Italian version	€ 0
	01700311- 1	Documentation - English version	€ 0
	01700312- 1	Documentation - French version	€ 0
	01700313- 1	Documentation - German version	€ 0
	01700314- 1	Documentation - Spanish version	€ 0
	01700330- 1	Documentation - Portuguese version	€ 0
	01700331- 1	Documentation - Slovenian version	€ 0
	01700332- 1	Documentation - Croatian version	€ 0
	01700415- 1	Documentation - Czech version	€ 0
	01700413- 1	Documentation - Greek version	€ 0
	01700416- 1	Documentation - Polish version	€ 0
	01700414- 1	Documentation - Hebrew version	€ 0
	01700464- 1	Documentation - Hungarian version	€ 0
	01700535- 1	Documentation - Romanian version	€ 0

OPTIONAL

Lifters			
---------	--	--	--

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



PRICE LIST

	PART NUMBER	DESCRIPTION	€
	01640313- 1	Front up and down lifter <ul style="list-style-type: none">• 01640313• For rear SCV• Including pair of front lift arms, cat. 1• Front PTO Mandatory	€ 2,652
	01640315- 1	Hydraulic registration for the rear arm 3rd point, 1-2 category <ul style="list-style-type: none">• 01640315• Diverter required with mechanical rear lift	€ 446
	01640316- 1	Hydraulic registration for the 3rd point rear arm, with quick connection <ul style="list-style-type: none">• Diverter required with mechanical rear lift• 01640316	€ 584
Power take off			
	01950078- 1	Front power take off 1000 rpm <ul style="list-style-type: none">• 01950078	€ 3,555
Diverter			
	01640317- 1	Diverter on STD/DE <ul style="list-style-type: none">• 01640317• For mechanical lift	€ 372
Weights			
	01800882- 1	Front weight set kg.34x6(tot. 204Kg)	€ 801
Hydraulic trailer braking system			
	01640324- 1 01640375- 1	Hydraulic trailer braking system CUNA type (Italy) <ul style="list-style-type: none">• For Italy only• 01640375	€ 1,125
	01640324- 1 01640376- 1	Hydraulic trailer braking system MOTHER REGULATION type <ul style="list-style-type: none">• 01640376	€ 1,623
Front mudguard			
	01810039- 1	Pair of front mudguard	€ 446
Electrical fittings			
	01900135- 1	Rotating lamp for roll bar <ul style="list-style-type: none">• Mandatory	€ 74
	01900136- 1	Rotating lamp for standard cab <ul style="list-style-type: none">• Mandatory	€ 74



- ⊕ **FOUR WHEELS DRIVE WITH FRONT TRACTION MAINLY**
- ⊕ **RIDE COMFORT: PLATFORM ON "SILENT BLOCK"**
- ⊕ **FRONT AND REAR DIFFERENTIAL LOCKS HYDRAULICALLY OPERATED**
- ⊕ **FOUR INTEGRATED POWERFUL BRAKES OF 290 MM DIAMETER**

Goldoni Transcar range has been designed to meet the specific needs of people who work in mountainous areas and require a machine that's particularly suitable for materials handling. With 38 to 71 hp, air or water cooled engines to choose from, steering wheels or articulated versions, 2 homologated versions available such as agricultural tractor or as utility vehicle.

NOTES



TRANSCAR 40SN MR

Tractors with load platform

PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
MODEL	
Type	● Tractor with loading platform
Structure	● Self supporting integral
Version	● Articulated (in the middle)
ENGINE	
Trademark	● Lombardini
Model	● LDW 1603
Fuel supply	● Diesel
Rated power (ECE R120)	● 28 KW / 38 hp
Legislation on emission	● STEP 3A
Number of cylinders	● 3
Aspiration	● Aspirated
Nominal rate	● 2800 rpm
Cooling	● On liquid
Swept volume	● 1649 cm ³
Specific fuel consumption (maximum torque speed)	● 250 g/KWh
Max torque	● 104Nm@1650rpm
Torque reserve	● 8,2 %
Air filter	● Dry
Tank capacity	● 38 litres
Engine bonnet	● VTR (Reinforced plastic with glass)
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 8+8 synchronized
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanic
Reverse control	● Lever
Rear differential lock	● Hydraulic
Rear traction engagement	● Mechanical with lever
Front differential lock	● Hydraulic
Front swinging	● 15° right side + 15° left side
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Braking	● Self-centering drum brakes, hydraulic control, separate double circuit.
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
STEERING WHEEL	
Steering wheel system	● Hydrostatic
Swinging front axle	● 37°
REAR PTO	
Type	● Independent single shaft
Independent speed from the gearbox	● 540 rpm
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Mechanical with dry disc (same transmission plate clutch)
Clutch control	● Mechanical with lever
Security	● PUSH & START device on PTO selector
ELECTRICAL FITTINGS	
Battery	● 12V 680A 74Ah
Security	● Battery disconnection
Instrument	● Digital / analogic

DESCRIPTION	VALUE
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	● Semi-platform
Platform support	● Silent-block
Front mudguard	● Body integrated
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Security	● Driver guard grille
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	
Rear tow hook	● Category CEE/CEE-X/CEE-Y adjustable
LOADING PLATFORM	
Type of platform	● Tipping, with 4 sides, steel made
Type of sides	● Steel made, interchangeable with ribs
Type of lifting	● Hydraulic with 5 segments cylinder
Type of tip	● Three-sided (left/rear/right)
Platform dimensions "L"	○ Length 2200 mm; Width 1300 mm; Height 350 mm
Platform dimensions "XL"	○ Length 2200 mm; Width 1500mm; Height 350 mm
WEIGHTS AND DIMENSIONS	
Wheelbase	● 2280 mm
Length (front bumper / rear platform)	● 4680 mm
Height with ROPS (min-max)	● 2185 mm
Height at steering wheel (min-max)	● 1310 mm
Loading platform height	● 860 mm
Connection angle	● 20°
Front protrusion (wheel centre/front bumper)	● 1330
Back protrusion (wheel centre/rear drop side)	● 1070 mm
Ground clearance (min-max)	● 245 mm
Distance between insides of tyres	● 754 - 927 mm
Minimum turning radius (internal)	● 4,25 m
Weight with roll-bar	● 1885 Kg
Load capacity with roll bar	● 2615 Kg
Fully load overall weight with roll bar	● 4500 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 6000 Kg
WHEELS	
Set of 4 wheels on fix disc	● 10.0/75-15.3

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



TRANSCAR 40SN MR

Tractors with load platform

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01170327- 1	Transcar 40SN - Roll-bar	€ 26,535
Wheels			
	01800838- 1	Set of wheels Rear and Front 10.0/75-15.3	€ 1,809
Towing devices			
	01730355- 1	Rear tow hook category CEE-X D.28	€ 222
	01730356- 1	Rear tow hook category CEE D.31	€ 254
Documentation language			
	01700537- 1	Documentation - Italian version	€ 0
	01700538- 1	Documentation - English version	€ 0
	01700539- 1	Documentation - French version	€ 0
	01700540- 1	Documentation - German version	€ 0
	01700541- 1	Documentation - Spanish version	€ 0
	01700542- 1	Documentation - Portuguese version	€ 0

OPTIONAL

Wagons			
	01630232- 1 01800665- 1	Three way tipping body 2400X1300X400 • Including set of 2 track spacers	€ 2,472
	01630233- 1	Three way tipping body 2400X1500X400	€ 2,270
Electrical fittings			
	01900126- 1	Rotating lamp for roll bar	€ 76

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- ⊕ **FOUR WHEELS DRIVE WITH FRONT TRACTION MAINLY**
- ⊕ **RIDE COMFORT: PLATFORM ON "SILENT BLOCK"**
- ⊕ **FRONT AND REAR DIFFERENTIAL LOCKS HYDRAULICALLY OPERATED**
- ⊕ **FOUR INTEGRATED POWERFUL BRAKES OF 290 MM DIAMETER**

Goldoni Transcar range has been designed to meet the specific needs of people who work in mountainous areas and require a machine that's particularly suitable for materials handling. With 38 to 71 hp, air or water cooled engines to choose from, steering wheels or articulated versions, 2 homologated versions available such as agricultural tractor or as utility vehicle.

NOTES



TRANSCAR 40RS MR

Tractors with load platform

PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | - not available

DESCRIPTION	VALUE
MODEL	
Type	● Tractor with loading platform
Structure	● Self supporting integral
Version	● Steering wheels
ENGINE	
Trademark	● Lombardini
Model	● LDW 1603
Fuel supply	● Diesel
Rated power (ECE R120)	● 28 KW / 38 hp
Legislation on emission	● STEP 3A
Number of cylinders	● 3
Aspiration	● Aspirated
Nominal rate	● 2800 rpm
Cooling	● On liquid
Swept volume	● 1649 cm3
Specific fuel consumption (maximum torque speed)	● 250 g/KWh
Max torque	● 104Nm@1650rpm
Torque reserve	● 8,2 %
Air filter	● Dry
Tank capacity	● 38 litres
Engine bonnet	● VTR (Reinforced plastic with glass)
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 8+8 synchronized
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanic
Reverse control	● Lever
Rear differential lock	● Hydraulic
Rear traction engagement	● Mechanical with lever
Front differential lock	● Hydraulic
Front swinging	● 15° right side + 15° left side
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Braking	● Self-centering drum brakes, hydraulic control, separate double circuit.
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
STEERING WHEEL	
Steering wheel system	● Hydrostatic
Steering angle	● .
REAR PTO	
Type	● Independent single shaft
Independent speed from the gearbox	● 540 rpm
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Mechanical with dry disc (same transmission plate clutch)
Clutch control	● Mechanical with lever
Security	● PUSH & START device on PTO selector
ELECTRICAL FITTINGS	
Battery	● 12V 680A 74Ah
Security	● Battery disconnection
Instrument	● Digital / analogic

DESCRIPTION	VALUE
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	● Semi-platform (roll-bar) - Suspended integral (cab)
Platform support	● Silent-block
Front mudguard	● Body integrated
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni SG2
Security	● Driver guard grille
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	
Rear tow hook	● Category CEE/CEE-X/CEE-Y adjustable
LOADING PLATFORM	
Type of platform	● Tipping, with 4 sides, steel made
Type of sides	● Steel made, interchangeable with ribs
Type of lifting	● Hydraulic with 5 segments cylinder
Type of tip	● Three-sided (left/rear/right)
Platform dimensions "L"	-
Platform dimensions "XL"	● Length 2200 mm; Width 1500mm; Height 350 mm
WEIGHTS AND DIMENSIONS	
Wheelbase	● 2580 mm
Length (front bumper / rear platform)	● 4980 mm
Height with ROPS (min-max)	● 2210 mm
Height with Standard Cab (min-max)	● 2020 mm
Height at steering wheel (min-max)	● 1310 mm
Loading platform height	● 860 mm
Connection angle	● 20°
Front protrusion (wheel centre/front bumper)	● 1130 mm
Back protrusion (wheel centre/rear drop side)	● 1080 mm
Ground clearance (min-max)	● 245 mm
Distance between insides of tyres	● 957 mm
Minimum turning radius (internal)	● 5,50 m
Weight with roll-bar	● 1930 Kg
Weight with Standard cab	● 2145 Kg
Load capacity with roll bar	● 2570 Kg
Load capacity with standard cab	● 2355 Kg
Fully load overall weight with roll bar	● 4500 Kg
Fully load overall weight with standard cab	● 4500 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 6000 Kg
WHEELS	
Set of 4 wheels on fix disc	● 10.0/75-15.3

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



TRANSCAR 40RS MR

Tractors with load platform

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01170326- 1	Transcar 40RS - Roll-bar	€ 27,362
Wheels			
	01800838- 1	Set of wheels Rear and Front 10.0/75-15.3	€ 1,809
Towing devices			
	01730355- 1	Rear tow hook category CEE-X D.28	€ 222
	01730356- 1	Rear tow hook category CEE D.31	€ 254
Documentation language			
	01700537- 1	Documentation - Italian version	€ 0
	01700538- 1	Documentation - English version	€ 0
	01700539- 1	Documentation - French version	€ 0
	01700540- 1	Documentation - German version	€ 0
	01700541- 1	Documentation - Spanish version	€ 0
	01700542- 1	Documentation - Portuguese version	€ 0

OPTIONAL

Wagons			
	01630233- 1	Three way tipping body 2400X1500X400	€ 2,270
	01630234- 1	Three way tipping body 2700X1500X400	€ 2,625
Electrical fittings			
	01900126- 1	Rotating lamp for roll bar	€ 76

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- ⊕ **FOUR WHEELS DRIVE WITH FRONT TRACTION MAINLY**
- ⊕ **RIDE COMFORT: PLATFORM ON "SILENT BLOCK"**
- ⊕ **FRONT AND REAR DIFFERENTIAL LOCKS HYDRAULICALLY OPERATED**
- ⊕ **FOUR INTEGRATED POWERFUL BRAKES OF 290 MM DIAMETER**

Goldoni Transcar range has been designed to meet the specific needs of people who work in mountainous areas and require a machine that's particularly suitable for materials handling. With 38 to 71 hp, air or water cooled engines to choose from, steering wheels or articulated versions, 2 homologated versions available such as agricultural tractor or as utility vehicle.

NOTES



TRANSCAR 80SN MR

Tractors with load platform

PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
MODEL	
Type	● Tractor with loading platform
Structure	● Self supporting integral
Version	● Articulated (in the middle)
ENGINE	
Trademark	● VM
Model	● D703 IE3
Fuel supply	● Diesel
Rated power (ECE R120)	● 48,6 KW / 66 HP
Legislation on emission	● STAGE 3B
Number of cylinders	● 3
Aspiration	● Intercooler turbocharged
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 2082 cm3
Specific fuel consumption (maximum torque speed)	● 212 g/KWh
Max torque	● 260Nm@1200rpm
Torque reserve	● 31,3%
Air filter	● Dry
Tank capacity	● 38 litres
Engine bonnet	● VTR (Reinforced plastic with glass)
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 8+8 synchronized
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanic
Reverse control	● Lever
Rear differential lock	● Hydraulic
Rear traction engagement	● Mechanical with lever
Front differential lock	● Hydraulic
Front swinging	● 15° right side + 15° left side
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Braking	● Self-centering drum brakes, hydraulic control, separate double circuit.
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
STEERING WHEEL	
Steering wheel system	● Hydrostatic
Swinging front axle	● 37°
REAR PTO	
Type	● Independent single shaft
Independent speed from the gearbox	● 540 rpm
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Mechanical with dry disc (same transmission plate clutch)
Clutch control	● Mechanical with lever
Security	● PUSH & START device on PTO selector
ELECTRICAL FITTINGS	
Battery	● 12V 680A 74Ah
Security	● Battery disconnection
Instrument	● Digital / analogic

DESCRIPTION	VALUE
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	● Semi-platform
Platform support	● Silent-block
Front mudguard	● Body integrated
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Security	● Driver guard grille
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	
Rear tow hook	● Category CEE/CEE-X/CEE-Y adjustable
LOADING PLATFORM	
Type of platform	● Tipping, with 4 sides, steel made
Type of sides	● Steel made, interchangeable with ribs
Type of lifting	● Hydraulic with 5 segments cylinder
Type of tip	● Three-sided (left/rear/right)
Platform dimensions "L"	○ Length 2400 mm; width 1300 mm; height 400 mm
Platform dimensions "XL"	○ Length 2400 mm; Width 1500 mm; Height 400 mm
WEIGHTS AND DIMENSIONS	
Wheelbase	● 2280 mm
Length (front bumper / rear platform)	● 4680 mm
Height with ROPS (min-max)	● 2185 mm
Height at steering wheel (min-max)	● 1310 mm
Loading platform height	● 860 mm
Connection angle	● 20°
Front protrusion (wheel centre/front bumper)	● 1330
Back protrusion (wheel centre/rear drop side)	● 1070 mm
Ground clearance (min-max)	● 245 mm
Distance between insides of tyres	● 754 - 927 mm
Minimum turning radius (internal)	● 4,25 m
Weight with roll-bar	● 1970 Kg
Load capacity with roll bar	● 2620 Kg
Fully load overall weight with roll bar	● 4500 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 6000 Kg
WHEELS	
Set of 4 wheels on fix disc	● 10.0/75-15.3

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



TRANSCAR 80SN MR

Tractors with load platform

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01170312- 1	Transcar 80SN - Roll-bar	€ 32,759
Wheels			
	01800838- 1	Set of wheels Rear and Front 10.0/75-15.3	€ 1,809
Towing devices			
	01730355- 1	Rear tow hook category CEE-X D.28	€ 222
	01730356- 1	Rear tow hook category CEE D.31	€ 254
Documentation language			
	01700537- 1	Documentation - Italian version	€ 0
	01700538- 1	Documentation - English version	€ 0
	01700539- 1	Documentation - French version	€ 0
	01700540- 1	Documentation - German version	€ 0
	01700541- 1	Documentation - Spanish version	€ 0
	01700542- 1	Documentation - Portuguese version	€ 0

OPTIONAL

Wagons			
	01630232- 1 01800665- 1	Three way tipping body 2400X1300X400 • Including set of 2 track spacers	€ 2,472
	01630233- 1	Three way tipping body 2400X1500X400	€ 2,270
Electrical fittings			
	01900126- 1	Rotating lamp for roll bar	€ 76

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- ⊕ **FOUR WHEELS DRIVE WITH FRONT TRACTION MAINLY**
- ⊕ **RIDE COMFORT: PLATFORM ON "SILENT BLOCK"**
- ⊕ **FRONT AND REAR DIFFERENTIAL LOCKS HYDRAULICALLY OPERATED**
- ⊕ **FOUR INTEGRATED POWERFUL BRAKES OF 290 MM DIAMETER**

Goldoni Transcar range has been designed to meet the specific needs of people who work in mountainous areas and require a machine that's particularly suitable for materials handling. With 38 to 71 hp, air or water cooled engines to choose from, steering wheels or articulated versions, 2 homologated versions available such as agricultural tractor or as utility vehicle.

NOTES



TRANSCAR 80RS MR

Tractors with load platform

PRICE LIST

TECHNICAL FEATURES

● standard | ○ on demand | - not available

DESCRIPTION	VALUE
MODEL	
Type	● Tractor with loading platform
Structure	● Self supporting integral
Version	● Steering wheels
ENGINE	
Trademark	● VM
Model	● D703 IE3
Fuel supply	● Diesel
Rated power (ECE R120)	● 48,6 KW / 66 HP
Legislation on emission	● STAGE 3B
Number of cylinders	● 3
Aspiration	● Intercooler turbocharged
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 2082 cm3
Specific fuel consumption (maximum torque speed)	● 212 g/KWh
Max torque	● 260Nm@1200rpm
Torque reserve	● 31,3%
Air filter	● Dry
Tank capacity	● 38 litres
Engine bonnet	● VTR (Reinforced plastic with glass)
TRANSMISSION	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 8+8 synchronized
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanic
Reverse control	● Lever
Rear differential lock	● Hydraulic
Rear traction engagement	● Mechanical with lever
Front differential lock	● Hydraulic
Front swinging	● 15° right side + 15° left side
Maximum speed (homologated)	● 40 Km/h
BRAKES	
Braking	● Self-centering drum brakes, hydraulic control, separate double circuit.
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
STEERING WHEEL	
Steering wheel system	● Hydrostatic
Steering angle	● .
REAR PTO	
Type	● Independent single shaft
Independent speed from the gearbox	● 540 rpm
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Mechanical with dry disc (same transmission plate clutch)
Clutch control	● Mechanical with lever
Security	● PUSH & START device on PTO selector
ELECTRICAL FITTINGS	
Battery	● 12V 680A 74Ah
Security	● Battery disconnection
Instrument	● Digital / analogic

DESCRIPTION	VALUE
Rotating lamp	○ Orange
OPERATING POSITION	
Platform	● Semi-platform (roll-bar) - Suspended integral (cab)
Platform support	● Silent-block
Front mudguard	● Body integrated
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni SG2
Security	● Driver guard grille
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
TOWING DEVICES	
Rear tow hook	● Category CEE/CEE-X/CEE-Y adjustable
LOADING PLATFORM	
Type of platform	● Tipping, with 4 sides, steel made
Type of sides	● Steel made, interchangeable with ribs
Type of lifting	● Hydraulic with 5 segments cylinder
Type of tip	● Three-sided (left/rear/right)
Platform dimensions "L"	-
Platform dimensions "XL"	● Length 2700 mm; Width 1500 mm; Height 400 mm
WEIGHTS AND DIMENSIONS	
Wheelbase	● 2580 mm
Length (front bumper / rear platform)	● 4900 mm
Height with ROPS (min-max)	● 2180 mm
Height with Standard Cab (min-max)	● 2020 mm
Height at steering wheel (min-max)	● 1310 mm
Loading platform height	● 860 mm
Connection angle	● 20°
Front protrusion (wheel centre/front bumper)	● 1240 mm
Back protrusion (wheel centre/rear drop side)	● 1080 mm
Ground clearance (min-max)	● 245 mm
Distance between insides of tyres	● 957 mm
Minimum turning radius (internal)	● 5,50 m
Weight with roll-bar	● 1970 Kg
Weight with Standard cab	● 2185 Kg
Load capacity with roll bar	● 2530 Kg
Load capacity with standard cab	● 2315 Kg
Fully load overall weight with roll bar	● 4500 Kg
Fully load overall weight with standard cab	● 4500 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 6000 Kg
WHEELS	
Set of 4 wheels on fix disc	● 10.0/75-15.3

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



TRANSCAR 80RS MR

Tractors with load platform

PRICE LIST

	PART NUMBER	DESCRIPTION	€
--	-------------	-------------	---

VERSIONS

Trims			
	01170309- 1	Transcar 80RS - Roll-bar	€ 33,592
Wheels			
	01800838- 1	Set of wheels Rear and Front 10.0/75-15.3	€ 1,809
Towing devices			
	01730355- 1	Rear tow hook category CEE-X D.28	€ 222
	01730356- 1	Rear tow hook category CEE D.31	€ 254
Documentation language			
	01700537- 1	Documentation - Italian version	€ 0
	01700538- 1	Documentation - English version	€ 0
	01700539- 1	Documentation - French version	€ 0
	01700540- 1	Documentation - German version	€ 0
	01700541- 1	Documentation - Spanish version	€ 0
	01700542- 1	Documentation - Portuguese version	€ 0

OPTIONAL

Wagons			
	01630233- 1	Three way tipping body 2400X1500X400	€ 2,270
	01630234- 1	Three way tipping body 2700X1500X400	€ 2,625
Electrical fittings			
	01900126- 1	Rotating lamp for roll bar	€ 76

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes