



- +
  - +
  - +
  - +
- TRANSMISSION 2AV + 2RM**
- GEARSTOP DEVICE ON THE HANDLEBAR GRIP**
- QUICK CONNECTION FOR IMPLEMENT**

M5 is the two-wheeled tractor created by Goldoni to revolutionize the quality of your work, even during your leisure time! M5 is the result of 80 years of experience. Its qualities are the ones that have made Goldoni's professional machines famous: simplicity, manoeuvrability, safety and exceptional sturdiness. Its potential is infinite, just turn the handlebars through 180° and you can use all the front-mounted implement such as: lawn mower, mower, snow plough, scraper, etc.

#### NOTES






**TECHNICAL FEATURES**

● standard | ○ on demand | - not available




DESCRIPTION	VALUE
<b>MODEL</b>	
Type	● Professional two-wheeled tractor
Structure	● Self supporting integral
<b>ENGINE</b>	
Trademark	● Goldoni
Model	● N 168 FB
Fuel supply	● Gasoline
Rated power (ECE R120)	● 4,8 kW / 6,5 CV
Manual start	● Pull start
Number of cylinders	● 1
Nominal rate	● 3600 rpm
Cooling	● Air
Swept volume	● 196 cm <sup>3</sup>
Air filter	● Dry
Tank capacity	● 3,6 litres
Engine bonnet	-
<b>TRANSMISSION</b>	
Type transmission	Mechanical traction, with ● endless screw and oil bath gears
Type gearbox	● 2+2
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 4,3"
Clutch control	● Mechanical with lever
Security	● GEARSTOP device on the handlebar grip
Type reverser	● Mechanic
Reverse control	● Lever
Differential lock	-
Wheels release	The mechanical lever control ● releases the trasmission to improve the maneuverability
Milling speed	1°FW:1,52 - 2°FW:3,06 - ● 1°REV:1,67 - 2°REV: 3,35 (Km/h)
Mowing speed	1°FW:1,67 - 2°FW:3,35 - ● 1°REV:1,52 - 2°REV: 3,06 (Km/h)
<b>BRAKES</b>	
Braking	● Indirect by endless screw trasmission
<b>REAR PTO</b>	
Type	● Independent single shaft
Independent speed from the gearbox	● 923 rpm
Rotation way (looking at the pto)	● Clockwise
Version	● 20X17 DIN 5482
Security	● PTO-STOP device with reverse engaged (milling only)
Equipment coupling	● Quick connection flange
<b>ELECTRICAL FITTINGS</b>	
Battery	-
1 pin socket	-
<b>OPERATING POSITION</b>	
180° reversible handle bars	● 180°
Handle bars with anti-vibration system	● Yes
Height adjustable handle bars	● 9 positions
Sideway adjustable handle bars	● 2 positions
Tool box	● Yes
Use and maintenance manual	● Yes
<b>TOWING DEVICES</b>	
Rear tow hook	● 1 (adjustable in 2 positions)
<b>WEIGHTS</b>	
Front	○ 1 pc front ballast 20 kg.

DESCRIPTION	VALUE
Wheel	-
<b>WEIGHTS AND DIMENSIONS</b>	
Lenght (front bumper / rear handle bar)	● 1670 mm.
Weight with wheels and rotary cultivator	● 90Kg
<b>WHEELS AND DIMENSIONS</b>	
Set of wheels 4.00X8" on fix disc with adjustable axle	● Obtainable lenghts: 417mm - 467mm - 497mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
<b>VERSIONS</b>			
<b>Trims</b>			
	03040020- 1	M5 5 <ul style="list-style-type: none"> <li>• Set of wheels 4.00X8" on fix disc with adjustable axle</li> </ul>	€ 2,242
<b>Accessories</b>			
	01730454- 1	Rear tow hook	€ 44
	01800678- 1	Front ballast weight 20kg <ul style="list-style-type: none"> <li>• Suggested in ploughing</li> </ul>	€ 161
<b>EQUIPMENTS</b>			
<b>Rotary cultivator</b>			
	01200010- 1	Rotary cultivator model 19 <ul style="list-style-type: none"> <li>• Ideal for standard soil, soft or sandy.</li> <li>• Working width 450mm</li> <li>• Quick connection for implement</li> </ul>	€ 589
	01200015- 1	Rotary tiller model 19S <ul style="list-style-type: none"> <li>• Ideal for standard soil, soft or sandy.</li> <li>• Working width 570mm</li> <li>• Quick connection for implement</li> </ul>	€ 669
	01800305- 1	Transfer wheel for rotary cultivator	€ 69
<b>Sickle bar transmission and cutter bar</b>			
	03720000- 1	Sickle bar transmission tipe 70 with special teeth 1000mm cutter bar <ul style="list-style-type: none"> <li>• Quick connection for implement</li> <li>• Complete with 22kg ballast weight</li> <li>• Complete with spare blade</li> </ul>	€ 1,147
<b>Ploughs and ridgers</b>			

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
	01640150- 1	Single furrow plough model GU/MC <ul style="list-style-type: none"> <li>• Tool-bar mandatory</li> </ul>	€ 167
	01640409- 1	Ridger model GU/AS <ul style="list-style-type: none"> <li>• Tool-bar mandatory</li> <li>• With adjustable mouldboard</li> </ul>	€ 161
	01640109- 1	Ridger model GJS/AS5 <ul style="list-style-type: none"> <li>• With adjustable mouldboard</li> <li>• Complete with ballast weight</li> </ul>	€ 274
	01640415- 1	Rotary-rear ridger model U <ul style="list-style-type: none"> <li>• Complete with coupling flange for rotary cultivator model 19</li> </ul>	€ 98
	01640149- 1	Tool-bar model GU <ul style="list-style-type: none"> <li>• Tow hook mandatory</li> </ul>	€ 93
	01640106- 1	Tool-bar model GJ/32 <ul style="list-style-type: none"> <li>• Tow hook mandatory</li> </ul>	€ 216
<b>More equipments</b>			
	01640154- 1	Front scraper blade <ul style="list-style-type: none"> <li>• Width 800mm, height 400mm</li> <li>• Quick connection for implement</li> </ul>	€ 502

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- + 4FWD+4REV TRANSMISSION IN BOTH WAYS**
- + GEARSTOP DEVICE ON THE HANDLEBAR GRIP**
- + REVERSE CONTROL ON THE HANDLEBAR**
- + WITH DIFFERENTIAL**

In order to be productive, agriculture needs specialized machines that work quickly and safely; M series two-wheeled tractors, specifically designed for specialized crops, provide undoubted guarantees for this type of work. Experience acquired during more than 80 years of manufacturing agricultural machines for specialized crops has allowed us to create a truly exceptional machine for nurseries, greenhouses and horticulture. Precision at work combined with the utmost manoeuvrability make this two-wheeled tractor an essential machine for all market-gardeners and nurserymen in their daily work. M series two-wheeled tractor is extremely versatile, as testified by the numerous ways in which it can be used with the most different sorts of implements for every type of job.

**NOTES**





## TECHNICAL FEATURES

● standard | ○ on demand | — not available





DESCRIPTION	VALUE
<b>MODEL</b>	
Type	● Professional two-wheeled tractor
Structure	● Self supporting integral
<b>ENGINE</b>	
Trademark	● Goldoni
Model	● SH186FA
Fuel supply	● Diesel
Rated power (ECE R120)	● 7,5 kW / 10 CV
Manual start	● Pull start
Electric starting	● By key in the dashboard
Number of cylinders	● 1
Nominal rate	● 3000 rpm
Cooling	● Air
Swept volume	● 418 cm <sup>3</sup>
Air filter	● Oil bath
Tank capacity	● 5 litres
Engine bonnet	● Nylon 6
<b>TRANSMISSION</b>	
Type transmission	● Mechanical traction, with endless screw and oil bath gears
Type gearbox	● 4+3 for milling/ 3+4 for mowing
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 4,3"
Clutch control	● Mechanical with lever
Security	● GEARSTOP device on the handlebar grip
Type reverser	● Mechanic
Reverse control	● Lever
Differential lock	● Mechanical with lever
Wheels release	● The mechanical lever control releases the trasmission to improve the maneuverability
Milling speed	● 1°FW:1,12 - 2°FW:1,72 - 3°FW:4,24 - 4°FW:6,18 - 1°REV:0,79 - 2°REV:1,21 - 3°REV:2,99 (Km/h)
Mowing speed	● 1°FW:1,12 - 2°FW:1,72 - 3°FW:4,24 - 4°FW:6,18 - 1°REV:0,79 - 2°REV:1,21 - 3°REV:2,99 (Km/h)
<b>BRAKES</b>	
Braking	● Indirect by endless screw trasmission
<b>REAR PTO</b>	
Type	● Independent single shaft
Independent speed from the gearbox	● 923 rpm
Rotation way (looking at the pto)	● Clockwise
Version	● 20X17 DIN 5482
Security	● PTO-STOP device with reverse engaged (milling only)
Equipment coupling	● Fixed or quick connection flange
<b>ELECTRICAL FITTINGS</b>	
Battery	● 12V 300A 30Ah
1 pin socket	● 12 Volt
<b>OPERATING POSITION</b>	
180° reversible handle bars	● 180°
Handle bars with anti-vibration system	● Yes
Height adjustable handle bars	● 9 positions
Sideway adjustable handle bars	● 2 positions
Tool box	● No
Use and maintenance manual	● Yes

DESCRIPTION	VALUE
<b>TOWING DEVICES</b>	
Rear tow hook	● 1 (adjustable in 2 positions)
<b>WEIGHTS</b>	
Front	● 1 pc front ballast 20 kg.
<b>WEIGHTS AND DIMENSIONS</b>	
Lenght (front bumper / rear handle bar)	● 1768 mm
Weight with wheels and rotary cultivator	● 153 Kg
<b>WHEELS AND DIMENSIONS</b>	
Set of wheels 5.00x10" on adjustable disc with fix axle	● Obtainable widhts: 533mm - 553mm - 621mm - 661mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
<b>VERSIONS</b>			
<b>Trims</b>			
	03070033- 1	M 10D <ul style="list-style-type: none"> <li>Set of wheels 5.00x10" on adjustable disc with fix axle</li> </ul>	€ 5,639
<b>Side machine flanges</b>			
	01690079- 1	Fix connection flange	€ 76
	01690078- 1	Quick connection flange	€ 87
<b>Accessories</b>			
	01800815- 1	Front ballast weight 16Kg <ul style="list-style-type: none"> <li>Suggested in ploughing</li> </ul>	€ 254
<b>EQUIPMENTS</b>			
<b>Rotary cultivator</b>			
	03210003- 1	Rotary tiller model 21M <ul style="list-style-type: none"> <li>Ideal for standard soil, hard or rocky.</li> <li>Working width 700mm-570mm-480mm-400mm</li> <li>Quick connection for implement</li> </ul>	€ 917
	01210114- 1	Rotary cultivator model 21 <ul style="list-style-type: none"> <li>Ideal for standard soil, soft or sandy.</li> <li>Working width 700mm-570mm-480mm-400mm</li> <li>Without implement connection flange</li> </ul>	€ 1,172
	01620421- 1	Fix connection flange	€ 112

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
	01620417- 1	Quick connection flange	€ 130
	01800303- 1	Transfer wheel for rotary cultivator	€ 69
<b>Sickle bar transmission and cutter bar</b>			
	03720005- 1	Sickle bar transmission type 85 with special teeth cutter bar 1150 mm <ul style="list-style-type: none"> <li>• Fix connection flange</li> <li>• Complete with 18kg ballast weight</li> <li>• Complete with spare blade</li> <li>• Complete with side blade protection</li> </ul>	€ 1,630
	03720004- 1	Sickle bar transmission type 85 with special teeth cutter bar 1150 mm <ul style="list-style-type: none"> <li>• Quick connection flange</li> <li>• Complete with 18kg ballast weight</li> <li>• Complete with spare blade</li> <li>• Complete with side blade protection</li> </ul>	€ 1,605
<b>Ploughs and ridgers</b>			
	01640414- 1	Rotary cultivator-rear ridger model G <ul style="list-style-type: none"> <li>• Complete with connection flange for rotary cultivator model 21</li> <li>• With adjustable mouldboard</li> </ul>	€ 135
<b>More equipments</b>			





- + 4FWD+4REV TRANSMISSION IN BOTH WAYS**
- + GEARSTOP DEVICE ON THE HANDLEBAR GRIP**
- + REVERSE CONTROL ON THE HANDLEBAR**
- + WITH DIFFERENTIAL**

In order to be productive, agriculture needs specialized machines that work quickly and safely; M series two-wheeled tractors, specifically designed for specialized crops, provide undoubted guarantees for this type of work. Experience acquired during more than 80 years of manufacturing agricultural machines for specialized crops has allowed us to create a truly exceptional machine for nurseries, greenhouses and horticulture. Precision at work combined with the utmost manoeuvrability make this two-wheeled tractor an essential machine for all market-gardeners and nurserymen in their daily work. M series two-wheeled tractor is extremely versatile, as testified by the numerous ways in which it can be used with the most different sorts of implements for every type of job.

#### NOTES






**TECHNICAL FEATURES**

● standard | ○ on demand | — not available





DESCRIPTION	VALUE
<b>MODEL</b>	
Type	● Professional two-wheeled tractor
Structure	● Self supporting integral
<b>ENGINE</b>	
Trademark	● Goldoni
Model	● FC 188 F
Fuel supply	● Diesel
Rated power (ECE R120)	● 10 kW / 13 CV
Manual start	● Pull start
Number of cylinders	● 1
Nominal rate	● 3600 rpm
Cooling	● Air
Swept volume	● 389 cm3
Air filter	● Oil bath
Tank capacity	● 5 litres
Engine bonnet	● Nylon 6
<b>TRANSMISSION</b>	
Type transmission	● Mechanical traction, with endless screw and oil bath gears
Type gearbox	● 4+3 for milling/ 3+4 for mowing
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 4,3"
Clutch control	● Mechanical with lever
Security	● GEARSTOP device on the handlebar grip
Type reverser	● Mechanic
Reverse control	● Lever
Differential lock	● Mechanical with lever
Wheels release	● The mechanical lever control releases the trasmission to improve the maneuverability
Milling speed	● 1°FW:1,12 - 2°FW:1,72 - 3°FW:4,24 - 4°FW:6,18 - 1°REV:0,79 - 2°REV:1,21 - 3°REV:2,99 (Km/h)
Mowing speed	● 1°FW:1,12 - 2°FW:1,72 - 3°FW:4,24 - 4°FW:6,18 - 1°REV:0,79 - 2°REV:1,21 - 3°REV:2,99 (Km/h)
<b>BRAKES</b>	
Braking	● Indirect by endless screw trasmission
<b>REAR PTO</b>	
Type	● Independent single shaft
Independent speed from the gearbox	● 923 rpm
Rotation way (looking at the pto)	● Clockwise
Version	● 20X17 DIN 5482
Security	● PTO-STOP device with reverse engaged (milling only)
Equipment coupling	● Fixed or quick connection flange
<b>ELECTRICAL FITTINGS</b>	
Battery	● 12V 300A 30Ah
1 pin socket	● 12 Volt
<b>OPERATING POSITION</b>	
180° reversible handle bars	● 180°
Handle bars with anti-vibration system	● Yes
Height adjustable handle bars	● 9 positions
Sideway adjustable handle bars	● 2 positions
Tool box	● No
Use and maintenance manual	● Yes
<b>TOWING DEVICES</b>	

DESCRIPTION	VALUE
Rear tow hook	● 1 (adjustable in 2 positions)
<b>WEIGHTS</b>	
Front	● 1 pc front ballast 20 kg.
<b>WEIGHTS AND DIMENSIONS</b>	
Lenght (front bumper / rear handle bar)	● 1768 mm
Weight with wheels and rotary cultivator	● 153 Kg
<b>WHEELS AND DIMENSIONS</b>	
Set of wheels 5.00x10" on adjustable disc with fix axle	● Obtainable widhts: 533mm - 553mm - 621mm - 661mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
<b>VERSIONS</b>			
<b>Trims</b>			
	03070033- 1	M 15 <ul style="list-style-type: none"> <li>Set of wheels 5.00x10" on adjustable disc with fix axle</li> </ul>	€ 5,639
<b>Side machine flanges</b>			
	01690079- 1	Fix connection flange	€ 76
	01690078- 1	Quick connection flange	€ 87
<b>Accessories</b>			
	01800815- 1	Front ballast weight 16Kg <ul style="list-style-type: none"> <li>Suggested in ploughing</li> </ul>	€ 254
<b>EQUIPMENTS</b>			
<b>Rotary cultivator</b>			
	03210003- 1	Rotary tiller model 21M <ul style="list-style-type: none"> <li>Ideal for standard soil, hard or rocky.</li> <li>Working width 700mm-570mm-480mm-400mm</li> <li>Quick connection for implement</li> </ul>	€ 917
	01210114- 1	Rotary cultivator model 21 <ul style="list-style-type: none"> <li>Ideal for standard soil, soft or sandy.</li> <li>Working width 700mm-570mm-480mm-400mm</li> <li>Without implement connection flange</li> </ul>	€ 1,172
	01620421- 1	Fix connection flange	€ 112

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
	01620417- 1	Quick connection flange	€ 130
	01800303- 1	Transfer wheel for rotary cultivator	€ 69
<b>Sickle bar transmission and cutter bar</b>			
	03720005- 1	Sickle bar transmission type 85 with special teeth cutter bar 1150 mm <ul style="list-style-type: none"> <li>• Fix connection flange</li> <li>• Complete with 18kg ballast weight</li> <li>• Complete with spare blade</li> <li>• Complete with side blade protection</li> </ul>	€ 1,630
	03720004- 1	Sickle bar transmission type 85 with special teeth cutter bar 1150 mm <ul style="list-style-type: none"> <li>• Quick connection flange</li> <li>• Complete with 18kg ballast weight</li> <li>• Complete with spare blade</li> <li>• Complete with side blade protection</li> </ul>	€ 1,605
<b>Ploughs and ridgers</b>			
	01640414- 1	Rotary cultivator-rear ridger model G <ul style="list-style-type: none"> <li>• Complete with connection flange for rotary cultivator model 21</li> <li>• With adjustable mouldboard</li> </ul>	€ 135
<b>More equipments</b>			

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- ⊕ WITH DIFFERENTIAL
- ⊕ INDEPENDENT BRAKES
- ⊕ GEARSTOP DEVICE ON THE HANDLEBAR GRIP

With 12 to 14 hp diesel and gasoline engines, the M16 series two-wheeled tractors are extremely versatile and simple to manoeuvre when equipped with various tools. They are easily able to deal with all the cutting, ploughing, planting, mowing and pest control treatments required in the greenhouses, nurseries and market gardens. If these are the versatility features of MySpecial, we have certainly not neglected the technical aspects of safety, thus the operator can work with the utmost confidence.

#### NOTES





## TECHNICAL FEATURES

● standard | ○ on demand | – not available

DESCRIPTION	VALUE
<b>MODEL</b>	
Type	● Professional two-wheeled tractor
Structure	● Self supporting integral
<b>ENGINE</b>	
Trademark	● Goldoni
Model	● SH1100FE
Fuel supply	● Diesel
Rated power (ECE R120)	● 11 kW / 15 CV
Manual start	● Pull start
Electric starting	○ By key in the dashboard
Number of cylinders	● 1
Nominal rate	● 3000 rpm
Cooling	● Air
Swept volume	● 668 cm <sup>3</sup>
Air filter	● Oil bath
Tank capacity	● 5,2 liters
Engine bonnet	● Sheet metal
<b>TRANSMISSION</b>	
Type transmission	● Mechanical traction, with bath oil gears
Type gearbox	● 4+2 milling/ 2+2 mowing
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 6,1"
Clutch control	● Mechanical with lever
Security	● GEARSTOP device on the handlebar grip
Type reverser	● Mechanic
Reverse control	● Lever
Differential lock	● Mechanical with lever
Milling speed	● 1°FW:1,33 - 2°FW:1,95 - 3FW:5,84 - 4FW:7,96 - 1°REV:2,73 - 2°REV:3,57 (Km/h)
Mowing speed	● 1°FW:2,73 - 2°FW:3,57 - 1°REV:1,33 - 2°REV:1,95 (Km/h)
<b>BRAKES</b>	
Braking	● Band brakes, independents or simultaneous controls
<b>REAR PTO</b>	
Type	● Independent single shaft
Independent speed from the gearbox	● 540/923 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Anticlockwise
Version	● 26 UNI 220
Security	● PTO-STOP device with reverse engaged (milling only)
Equipment coupling	● Fix connection flange
<b>ELECTRICAL FITTINGS</b>	
Battery	● 12V 300A 30Ah
1 pin socket	● 12 Volt
<b>OPERATING POSITION</b>	
180° reversible handle bars	● 180°
Handle bars with anti-vibration system	● Yes
Height adjustable handle bars	● 9 positions
Sideway adjustable handle bars	● 2 positions
Tool box	● Yes (not available with electrical start)
Use and maintenance manual	● Yes
<b>TOWING DEVICES</b>	
Rear tow hook	● 2
<b>WEIGHTS</b>	
Front	–

DESCRIPTION	VALUE
Wheel	● Set of ballast weight for wheels kg 17x2 (tot. 34kg)
<b>WEIGHTS AND DIMENSIONS</b>	
Lenght (front bumper / rear handle bar)	● 2016 mm
Weight with wheels and rotary cultivator	● 245 Kg
<b>WHEELS AND DIMENSIONS</b>	
Set of wheels 6.5/80x12" on adjustable disc and fix axle	● Obtainable widths: 567mm - 649mm - 761mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
<b>VERSIONS</b>			
<b>Trims</b>			
	03010025- 1	<b>M16</b> <ul style="list-style-type: none"> <li>Set of wheels 6,5/80x12" on adjustable disc with adjustable axle</li> </ul>	<b>€ 6,642</b>
	03010026- 1	<b>M16</b> <ul style="list-style-type: none"> <li>Electric starting</li> <li>Set of wheels 6,5/80x12" on adjustable disc with adjustable axle</li> </ul>	<b>€ 7,546</b>
<b>Accessories</b>			
	01800544- 1	Set of ballast weight for wheels kg 17x2 (tot. 34kg) <ul style="list-style-type: none"> <li>Suggested in ploughing</li> </ul>	<b>€ 354</b>
<b>EQUIPMENTS</b>			
<b>Rotary cultivator</b>			
	01220011- 1	<b>Rotary tiller model 22</b> <ul style="list-style-type: none"> <li>Ideal for standard soil, soft or sandy.</li> <li>Working width 790mm-680mm-570mm-460mm</li> <li>Fix connection flange</li> </ul>	<b>€ 1,444</b>
	01220012- 1	<b>Rotary tiller model 22M</b> <ul style="list-style-type: none"> <li>Ideal for standard soil, hard or rocky.</li> <li>Working width 790mm-680mm</li> <li>Fix connection flange</li> </ul>	<b>€ 1,444</b>
	01800301- 1	Transfer wheel for rotary cultivator	<b>€ 69</b>
<b>Ploughs and ridgers</b>			
	01640405- 1	<b>Rotary-rear ridger model B</b> <ul style="list-style-type: none"> <li>Complete with connection flange for rotary cultivator model 22</li> <li>With adjustable mouldboard</li> </ul>	<b>€ 135</b>
<b>More equipments</b>			

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



- ⊕ **FOUR WHEELS DRIVE WITH FRONT TRACTION MAINLY**
- ⊕ **RIDE COMFORT: PLATFORM ON "SILENT BLOCK"**
- ⊕ **FRONT AND REAR DIFFERENTIAL LOCKS HYDRAULICALLY OPERATED**
- ⊕ **FOUR INTEGRATED POWERFUL BRAKES OF 290 MM DIAMETER**

Goldoni T range has been designed to meet the specific needs of people who work in mountainous areas and require a machine that's particularly suitable for materials handling. With or water cooled engines to choose from, steering wheels or articulated versions, 2 homologated versions available such as agricultural tractor or as utility vehicle.

**NOTES**



## TECHNICAL FEATURES

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
<b>MODEL</b>	
Type	● Tractor with loading platform
Structure	● Self supporting integral
Version	● Articulated (in the middle)
<b>ENGINE</b>	
Trademark	● Doosan
Model	● D18
Fuel supply	● Diesel
Rated power (ECE R120)	● 40 kW/55 CV
Legislation on emission	● STAGE V
Number of cylinders	● 3
Aspiration	● Intercooler turbocharged
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 1800 cm3
Specific fuel consumption (maximum torque speed)	● 250 g/KWh
Max torque	● 180Nm@1400giri/minuto
Torque reserve	● 26%
Air filter	● Dry
Tank capacity	● 38 litres
Engine bonnet	● VTR (Reinforced plastic with glass)
<b>TRANSMISSION</b>	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 8+8 synchronized
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanic
Reverse control	● Lever
Rear differential lock	● Hydraulic
Rear traction engagement	● Mechanical with lever
Front differential lock	● Hydraulic
Front swinging	● 15° right side + 15° left side
Maximum speed (homologated)	● 40 Km/h
<b>BRAKES</b>	
Braking	● Self-centering drum brakes, hydraulic control, separate double circuit.
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
<b>STEERING WHEEL</b>	
Steering wheel system	● Hydrostatic
Swinging front axle	● 37°
<b>REAR PTO</b>	
Type	● Independent single shaft
Independent speed from the gearbox	● 540 rpm
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Mechanical with dry disc (same transmission plate clutch)
Clutch control	● Mechanical with lever
Security	● PUSH & START device on PTO selector
<b>ELECTRICAL FITTINGS</b>	
Battery	● 12V 680A 74Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
Rotating lamp	○ Orange

DESCRIPTION	VALUE
<b>OPERATING POSITION</b>	
Platform	● Semi-platform
Platform support	● Silent-block
Front mudguard	● Body integrated
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Security	● Driver guard grille
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
<b>TOWING DEVICES</b>	
Rear tow hook	● Category CEE/CEE-X/CEE-Y adjustable
<b>LOADING PLATFORM</b>	
Type of platform	● Tipping, with 4 sides, steel made
Type of sides	● Steel made, interchangeable with ribs
Type of lifting	● Hydraulic with 5 segments cylinder
Type of tip	● Three-sided (left/rear/right)
Platform dimensions "L"	○ Lenght 2400 mm; width 1300 mm; height 400 mm
Platform dimensions "XL"	○ Lenght 2400 mm; Width 1500 mm; Height 400 mm
<b>WEIGHTS AND DIMENSIONS</b>	
Wheelbase	● 2280 mm
Lenght (front bumper / rear platform)	● 4680 mm
Height with ROPS (min-max)	● 2185 mm
Height at steering wheel (min-max)	● 1310 mm
Loading platform height	● 860 mm
Connection angle	● 20°
Front protrusion (wheel centre/front bumper)	● 1330
Back protrusion (wheel centre/rear drop side)	● 1070 mm
Ground clearance (min-max)	● 245 mm
Distance between insides of tyres	● 754 - 927 mm
Minimum turning radius (internal)	● 4,25 m
Weight with roll-bar	● 1885 Kg
Load capacity with roll bar	● 2615 Kg
Fully load overall weight with roll bar	● 4500 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 6000 Kg
<b>WHEELS</b>	
Set of 4 wheels on fix disc	● 10.0/75-15.3

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
<b>VERSIONS</b>			
<b>Trims</b>			
	01170327- 1	T 60SN - Roll-bar	€ 31,921
<b>Wheels</b>			
	01800838- 1	Set of wheels Rear and Front 10.0/75-15.3	€ 2,176
<b>Towing devices</b>			
	01730355- 1	Rear tow hook category CEE-X D.28	€ 267
	01730356- 1	Rear tow hook category CEE D.31	€ 306
<b>Documentation language</b>			
	01700537- 1	Documentation - Italian version	€ 0
	01700538- 1	Documentation - English version	€ 0
	01700539- 1	Documentation - French version	€ 0
	01700540- 1	Documentation - German version	€ 0
	01700541- 1	Documentation - Spanish version	€ 0
	01700542- 1	Documentation - Portuguese version	€ 0
<b>OPTIONAL</b>			
<b>Wagons</b>			
	01630232- 1	Three way tipping body 2400X1300X400	€ 3,385
	01800665- 1	• Including set of 2 track spacers	
	01630233- 1	Three way tipping body 2400X1500X400	€ 3,141
<b>Electrical fittings</b>			
<b>Farming pack 4.0</b>			
	01641079- 1	KIT Agricoltura 4.0 TPC 40	€ 7,819



- ⊕ **FOUR WHEELS DRIVE WITH FRONT TRACTION MAINLY**
- ⊕ **RIDE COMFORT: PLATFORM ON "SILENT BLOCK"**
- ⊕ **FRONT AND REAR DIFFERENTIAL LOCKS HYDRAULICALLY OPERATED**
- ⊕ **FOUR INTEGRATED POWERFUL BRAKES OF 290 MM DIAMETER**

Goldoni T range has been designed to meet the specific needs of people who work in mountainous areas and require a machine that's particularly suitable for materials handling. With water cooled engines to choose from, steering wheels or articulated versions, 2 homologated versions available such as agricultural tractor or as utility vehicle.

**NOTES**

**TECHNICAL FEATURES**


● standard | ○ on demand | - not available

DESCRIPTION	VALUE
<b>MODEL</b>	
Type	● Tractor with loading platform
Structure	● Self supporting integral
Version	● Steering wheels
<b>ENGINE</b>	
Trademark	● Doosan
Model	● D18
Fuel supply	● Diesel
Rated power (ECE R120)	● 40 kW/55 CV
Legislation on emission	● STAGE V
Number of cylinders	● 3
Aspiration	● Intercooler turbocharged
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 1800 cm3
Specific fuel consumption (maximum torque speed)	● 250 g/KWh
Max torque	● 180Nm@1400giri/minuto
Torque reserve	● 26%
Air filter	● Dry
Tank capacity	● 38 litres
Engine bonnet	● VTR (Reinforced plastic with glass)
<b>TRANSMISSION</b>	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 8+8 synchronized
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanic
Reverse control	● Lever
Rear differential lock	● Hydraulic
Rear traction engagement	● Mechanical with lever
Front differential lock	● Hydraulic
Front swinging	● 15° right side + 15° left side
Maximum speed (homologated)	● 40 Km/h
<b>BRAKES</b>	
Braking	● Self-centering drum brakes, hydraulic control, separate double circuit.
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
<b>STEERING WHEEL</b>	
Steering wheel system	● Hydrostatic
Steering angle	● .
<b>REAR PTO</b>	
Type	● Independent single shaft
Independent speed from the gearbox	● 540 rpm
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Mechanical with dry disc (same transmission plate clutch)
Clutch control	● Mechanical with lever
Security	● PUSH & START device on PTO selector
<b>ELECTRICAL FITTINGS</b>	
Battery	● 12V 680A 74Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
Rotating lamp	○ Orange

DESCRIPTION	VALUE
<b>OPERATING POSITION</b>	
Platform	● Semi-platform (roll-bar) - ● Suspended integral (cab)
Platform support	● Silent-block
Front mudguard	● Body integrated
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni SG2
Security	● Driver guard grille
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
<b>TOWING DEVICES</b>	
Rear tow hook	● Category CEE/CEE-X/CEE-Y adjustable
<b>LOADING PLATFORM</b>	
Type of platform	● Tipping, with 4 sides, steel made
Type of sides	● Steel made, interchangeable with ribs
Type of lifting	● Hydraulic with 5 segments cylinder
Type of tip	● Three-sided (left/rear/right)
Platform dimensions "L"	- Lenght 2400 mm; width 1300 mm; height 400 mm
Platform dimensions "XL"	● Lenght 2400 mm; Width 1500 mm; Height 400 mm
<b>WEIGHTS AND DIMENSIONS</b>	
Wheelbase	● 2580 mm
Lenght (front bumper / rear platform)	● 4980 mm
Height with ROPS (min-max)	● 2210 mm
Height with Standard Cab (min-max)	● 2020 mm
Height at steering wheel (min-max)	● 1310 mm
Loading platform height	● 860 mm
Connection angle	● 20°
Front protrusion (wheel centre/front bumper)	● 1130 mm
Back protrusion (wheel centre/rear drop side)	● 1080 mm
Ground clearance (min-max)	● 245 mm
Distance between insides of tyres	● 957 mm
Minimum turning radius (internal)	● 5,50 m
Weight with roll-bar	● 1930 Kg
Weight with Standard cab	● 2145 Kg
Load capacity with roll bar	● 2570 Kg
Load capacity with standard cab	● 2355 Kg
Fully load overall weight with roll bar	● 4500 Kg
Fully load overall weight with standard cab	● 4500 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 6000 Kg
<b>WHEELS</b>	
Set of 4 wheels on fix disc	● 10.0/75-15.3

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
<b>VERSIONS</b>			
<b>Trims</b>			
	01170326- 1	T 60RS - Roll-bar	€ 32,916
<b>Wheels</b>			
	01800838- 1	Set of wheels Rear and Front 10.0/75-15.3	€ 2,176
<b>Towing devices</b>			
	01730355- 1	Rear tow hook category CEE-X D.28	€ 267
	01730356- 1	Rear tow hook category CEE D.31	€ 306
<b>Documentation language</b>			
	01700537- 1	Documentation - Italian version	€ 0
	01700538- 1	Documentation - English version	€ 0
	01700539- 1	Documentation - French version	€ 0
	01700540- 1	Documentation - German version	€ 0
	01700541- 1	Documentation - Spanish version	€ 0
	01700542- 1	Documentation - Portuguese version	€ 0
<b>OPTIONAL</b>			
<b>Wagons</b>			
	01630233- 1	Three way tipping body 2400X1500X400	€ 3,141
	01630234- 1	Three way tipping body 2700X1500X400	€ 3,633
<b>Electrical fittings</b>			
	01900126- 1	Rotating lamp for roll bar	€ 92
<b>Farming pack 4.0</b>			
	01641079- 1	KIT Agricoltura 4.0 TPC 40	€ 7,819

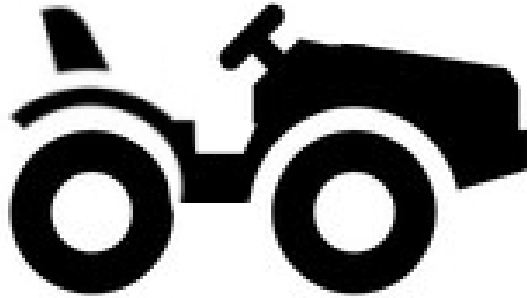

- ⊕ **SHORT WEELBASE**
- ⊕ **MAXIMUM WHEEL GRIP**
- ⊕ **16+16 GEARBOX WITH SYNCHRONIZED REVERSE SHUTTLE**
- ⊕ **1650 KG**

The Goldoni equal-size wheels tractors present themselves renewed and compliant with the new TMR 2 norm (Tractor Mother Regulation). The combination of a tapered chassis, a reduced steering radius, 4 drive wheels and direct injection engines from 23 to 55 hp, make the E series the ideal machines for working between narrow rows in vineyards and low-hanging orchards with limited room to manoeuvre. The compact load-bearing structure of this model ensures the centre of gravity remains low and close to the centre of the machine, enabling optimal weight distribution for safe operation, even when using very heavy tools.

#### NOTES

**TECHNICAL FEATURES**

● standard | ○ on demand | - not available

DESCRIPTION	VALUE
<b>MODEL</b>	
Type	● Equal wheels tractor
Structure	● <b>Self supporting integral</b>
Version	● Steering wheels
<b>ENGINE</b>	
Trademark	● Doosan
Model	● D18
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 40 kW/55 CV
Legislation on emission	● STAGE V
Number of cylinders	● 3
Aspiration	● Turbocharged
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 1800 cm3
Specific fuel consumption (maximum torque speed)	● .
Max torque	● 180Nm@1400giri/minuto
Torque reserve	● 26%
Tank capacity	● 30 litres
Engine bonnet	● RTM
<b>TRANSMISSION</b>	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● <b>16+16 synchronized</b>
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Hydraulic
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanical, synchronized with NO-SPIN Interlock
Reverse control	● Lever
Rear differential lock	● Mechanic
Front wheel drive coupling control	-
Front differential lock	● Mechanic
Front swinging	● 15° right side + 15° left side
Minimum speed	● 0,9 Km/h
Maximum speed (homologated)	● 30 Km/h
<b>BRAKES</b>	
Rear braking	● Multiplates bath oil, mechanical control
Front braking type	-
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	-
Trailer brake mechanical lever support	● CUNA type
<b>STEERING WHEEL</b>	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 34°
<b>REAR PTO</b>	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
More speeds independent from gearbox	-
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Hydraulic control, multiplates bath-oil
Clutch control	● Electro-hydraulic

DESCRIPTION	VALUE
Security	● PUSH & START device on PTO selector
<b>FRONT PTO</b>	
Type	-
<b>REAR LIFTER</b>	
Type	● Lifts and lowers hydraulic
Lifting capacity at the rear arms	● 1500 Kg
3-points hitch	● Category 1
3rd point mechanical arm	● Category 1
Hydraulic 3rd point arm	-
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
<b>FRONT LIFTER</b>	
Type	-
<b>HYDRAULIC SYSTEM</b>	
Type	● Open center
Pump flow rate	● 38 litres/minute
First rear hydraulic scv	● Double acting
Second rear hydraulic scv	● Double acting
Third rear hydraulic scv	-
Front hydraulic scv	-
Free oil discharge	● Quick 1/2 NPTF
<b>ELECTRICAL FITTINGS</b>	
Battery	● 12V 680A 74Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	○ Orange
<b>OPERATING POSITION</b>	
Platform	● Integral platform
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Folding Roll Bar
Standard cab	-
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
<b>TOWING DEVICES</b>	
Rear tow hook	○ C/CEE Category 7 heights adjustable
Front tow hook	● Fix
<b>WEIGHTS</b>	
Front	-
By tyre filled with water	● With air / water valve
<b>WEIGHTS AND DIMENSIONS</b>	
Wheelbase	● 1372 mm
Lenght (front bumper / rear lifting arms)	● 3312 mm
Width (min-max)	● 1422 - 1518 mm
Height with ROPS (min-max)	● 2130 - 2210 mm
Height on grille bonnet (min-max)	● 993 - 1001 mm
Height at steering wheel (min-max)	● 1200 - 1260 mm
Height at seat (min-max)	● 885 - 893 mm
Height at rear mudguard (min-max)	● 996 - 1004 mm
Ground clearance (min-max)	● 230 - 290 mm
Distance between insides of tyres	● 804 - 956 mm
Minimum turning radius (internal)	● 3,5 m

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

## PRICE LIST

# E60 RS STAGE V


Equal-wheel tractors

DESCRIPTION	VALUE
Weight with roll-bar	● 1680 Kg
Maximum laden mass	● 2800 Kg
<b>WHEELS AND DIMENSIONS ROLL BAR VERSION</b>	
Set of wheels Rear 8.25x16 Front 8.25x16	○ Minimum width 1241 mm; ○ Height 2099 mm; Ground clearance 383 mm
Set of wheels Rear 280/70R18 Front 280/70R18	○ Minimum width 1422 mm; ○ Height 2107 mm; Ground clearance 291 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



	PART NUMBER	DESCRIPTION	€
<b>VERSIONS</b>			
<b>Trims</b>			
	01100228- 1	E60 RS	€ 32,976
<b>Wheels</b>			
	01800737- 1	Set of wheels Rear and Front 8.25X16	€ 1,940
	01800803- 1	Set of wheels Rear and Front 280/70R18	€ 2,553
	01800890- 1	Set of wheels Rear 250/80R18 Front 250/80R18	€ 2,935
<b>Towing devices</b>			
	01730345- 1	Rear tow hook category CEE-X D.28	€ 230
	01730346- 1	Rear tow hook category CEE D.31	€ 267
<b>Lifters</b>			
	01640845- 1	Pair of rear arms 1 category	€ 249
<b>Electrical fittings</b>			
	01900125- 1	Rotating lamp for roll bar	€ 88
<b>Documentation language</b>			
	01700519- 1	Documentation - Italian version	€ 0
	01700520- 1	Documentation - English version	€ 0
	01700521- 1	Documentation - French version	€ 0
	01700522- 1	Documentation - German version	€ 0
	01700523- 1	Documentation - Spanish version	€ 0
	01700524- 1	Documentation - Portuguese version	€ 0
	01700525- 1	Documentation - Slovenian version	€ 0
	01700526- 1	Documentation - Croatian version	€ 0
<b>OPTIONAL</b>			
<b>Electrical fittings</b>			
	01900092- 1	Rear working light <ul style="list-style-type: none"> <li>• Adjustable</li> </ul>	€ 127

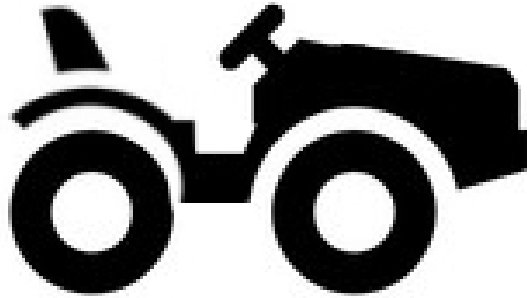

- ⊕ SHORT WEELBASE
- ⊕ MAXIMUM WHEEL GRIP
- ⊕ 1650 KG

The Goldoni equal-size wheels tractors present themselves renewed and compliant with the new TMR 2 norm (Tractor Mother Regulation). The combination of a tapered chassis, a reduced steering radius, 4 drive wheels and direct injection engines from 23 to 55hp, make the E series the ideal machines for working between narrow rows in vineyards and low-hanging orchards with limited room to manoeuvre. The compact load-bearing structure of this model ensures the centre of gravity remains low and close to the centre of the machine, enabling optimal weight distribution for safe operation, even when using very heavy tools.

**NOTES**

- The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

**TECHNICAL FEATURES**

● standard | ○ on demand | – not available

DESCRIPTION	VALUE
<b>MODEL</b>	
Type	● Equal wheels tractor
<b>Structure</b>	● <b>Self supporting integral</b>
Version	● Articulated (in the middle)
<b>ENGINE</b>	
Trademark	● Doosan
Model	● D18
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 40 kW/55 CV
Legislation on emission	● STAGE V
Number of cylinders	● 3
Aspiration	● Turbocharged
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 1800 cm3
Specific fuel consumption (maximum torque speed)	● .
Max torque	● 180Nm@1400giri/minuto
Torque reserve	● 26%
Tank capacity	● 30 litres
Engine bonnet	● RTM
<b>TRANSMISSION</b>	
Type transmission	● Mechanical drive, four-wheel drive
<b>Type gearbox</b>	● <b>12+4 synchronized</b>
Gearbox control	● Mechanical with middle levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Hydraulic
Security	● PUSH & START device on clutch pedal and Interlock on gear lever
Rear differential lock	● Mechanic
Front wheel drive coupling control	–
Front differential lock	● Mechanic
Front swinging	● 15° right side + 15° left side
Minimum speed	● 1,2 Km/h
Maximum speed (homologated)	● 30 Km/h
<b>BRAKES</b>	
Rear braking	● Multiplates bath oil, mechanical control
<b>Front braking type</b>	–
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	–
Trailer brake mechanical lever support	● CUNA type
<b>STEERING WHEEL</b>	
Steering wheel system	● Hydrostatic with Load Sensing valve
Swinging front axle	● 45°
<b>REAR PTO</b>	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
More speeds independent from gearbox	–
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Hydraulic control, multiplates bath-oil
Clutch control	● Electro-hydraulic
Security	● PUSH & START device on PTO selector
<b>FRONT PTO</b>	

DESCRIPTION	VALUE
Type	–
<b>REAR LIFTER</b>	
Type	● Lifts and lowers hydraulic
Lifting capacity at the rear arms	● 1500 Kg
3-points hitch	● Category 1
3rd point mechanical arm	● Category 1
Hydraulic 3rd point arm	–
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
<b>FRONT LIFTER</b>	
Type	–
<b>HYDRAULIC SYSTEM</b>	
Type	● Open center
Pump flow rate	● 38 litres/minute
First rear hydraulic scv	● Double acting
Second rear hydraulic scv	● Double acting
Third rear hydraulic scv	–
Front hydraulic scv	–
Free oil discharge	● Quick 1/2 NPTF
<b>ELECTRICAL FITTINGS</b>	
Battery	● 12V 680A 74Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	○ Orange
<b>OPERATING POSITION</b>	
Platform	● Integral platform
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Folding Roll Bar
Standard cab	–
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
<b>TOWING DEVICES</b>	
Rear tow hook	○ C/CEE Category 7 heights adjustable
Front tow hook	● Fix
<b>WEIGHTS</b>	
Front	–
By tyre filled with water	● With air / water valve
<b>WEIGHTS AND DIMENSIONS</b>	
<b>Wheelbase</b>	● <b>1372 mm</b>
Lenght (front bumper / rear lifting arms)	● 3312 mm
Width (min-max)	● 1194 - 378 mm
Height with ROPS (min-max)	● 2160 - 2240 mm
Height on grille bonnet (min-max)	● 993 - 1048 mm
Height at steering wheel (min-max)	● 1200 - 1307 mm
Height at seat (min-max)	● 885 - 940 mm
Height at rear mudguard (min-max)	● 996 - 1051 mm
Ground clearance (min-max)	● 250 - 320 mm
Distance between insides of tyres	● 629 - 823 mm
Minimum turning radius (internal)	● 2,38 m
Weight with roll-bar	● 1680 Kg
Maximum laden mass	● 2800 Kg
<b>WHEELS AND DIMENSIONS ROLL BAR VERSION</b>	

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

## PRICE LIST

# E60 SN STAGE V

Equal-wheel tractors

DESCRIPTION	VALUE
Set of wheels Rear 8.25x16 Front 8.25x16	Minimum width 1101 mm; ○ Height 2099 mm; Ground clearance 283 mm
Set of wheels Rear 280/70R18 Front 280/70R18	Minimum width 1194 mm; ○ Height 2107 mm; Ground clearance 291 mm
Set of wheels Rear 300/70R20 Front 300/70R20	Minimum width 1219 mm; ○ Height 2154 mm; Ground clearance 338 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
<b>VERSIONS</b>			
<b>Trims</b>			
	01100229- 1	E60 SN	€ 32,104
<b>Wheels</b>			
	01800738- 1	Set of wheels Rear and Front 8.25X16	€ 1,940
	01800802- 1	Set of wheels Rear and Front 280/70R18	€ 2,553
	01800903- 1	Rear and Front Wheel Set 280/70R20	€ 2,796
<b>Towing devices</b>			
	01730345- 1	Rear tow hook category CEE-X D.28	€ 230
	01730346- 1	Rear tow hook category CEE D.31	€ 267
<b>Lifters</b>			
	01640845- 1	Pair of rear arms 1 category	€ 249
<b>Electrical fittings</b>			
	01900125- 1	Rotating lamp for roll bar	€ 88
<b>Documentation language</b>			
	01700519- 1	Documentation - Italian version	€ 0
	01700520- 1	Documentation - English version	€ 0
	01700521- 1	Documentation - French version	€ 0
	01700522- 1	Documentation - German version	€ 0
	01700523- 1	Documentation - Spanish version	€ 0
	01700524- 1	Documentation - Portuguese version	€ 0
	01700525- 1	Documentation - Slovenian version	€ 0
	01700526- 1	Documentation - Croatian version	€ 0
<b>OPTIONAL</b>			
<b>Electrical fittings</b>			
	01900092- 1	Rear working light <ul style="list-style-type: none"> <li>Adjustable</li> </ul>	€ 127



- ⊕ **STURDY**
- ⊕ **ARTICULATED**
- ⊕ **MINIMUM WIDTH 80 CM**
- ⊕ **THE WORLD'S SMALLEST EQUAL-WHEEL TRACTOR**

The Goldoni equal-size wheels tractors present themselves renewed and compliant with the new TMR 2 norm (Tractor Mother Regulation). The combination of a tapered chassis, a reduced steering radius, 4 drive wheels and direct injection engines from 23 to 55 hp, make the E series the ideal machines for working between narrow rows in vineyards and low-hanging orchards with limited room to manoeuvre. The compact load-bearing structure of this model ensures the centre of gravity remains low and close to the centre of the machine, enabling optimal weight distribution for safe operation, even when using very heavy tools.

#### NOTES

**TECHNICAL FEATURES**

● standard | ○ on demand | - not available

DESCRIPTION	VALUE
<b>MODEL</b>	
Type	● Equal wheels tractor
Structure	● Self supporting integral
Version	● Articulated (in the middle)
<b>ENGINE</b>	
Trademark	● Goldoni
Model	● NK292FE
Fuel supply	● Diesel
Rated power (ECE R120)	● 17 kW/ 23 CV
Legislation on emission	● STAGE V
Number of cylinders	● 2
Aspiration	● Aspirated
Nominal rate	● 3600 rpm
Cooling	● Air
Swept volume	● 997 cm3
Specific fuel consumption (maximum torque speed)	● 237 g/KWh
Max torque	● 54Nm@2300 rpm
Torque reserve	● 6%
Air filter	● Oil bath
Tank capacity	● 15 litres
Engine bonnet	● Sheet metal
<b>TRANSMISSION</b>	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 6+3 plug-in easy connection
Gearbox control	● Mechanical with front lever
Clutch	● Dry single plate clutch, diameter 7,3"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on clutch pedal and Interlock on gear lever
Type reverser	- Mechanical, synchronized
Rear differential lock	● Mechanic
Front wheel drive coupling control	-
Front differential lock	● Mechanic
Front swinging	● 8° right + 8° left
Minimum speed	● 2,45 Km/h
Maximum speed (homologated)	● 19 Km/h
<b>BRAKES</b>	
Rear braking	DRUM BRAKES, ● MECHANICALLY CONTROLLED
Front braking type	-
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
<b>STEERING WHEEL</b>	
Steering wheel system	● Hydrostatic
Swinging front axle	● 30°
<b>REAR PTO</b>	
Type	● Single shaft, synchronized and independent
Power	● 12,7 KW / 17,2 CV
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● 1 wheel revolution = 15,043 PTO revolution
Rotation way (looking at the pto)	● Clockwise (upper PTO) / Anticlockwise (lower PTO)
Version	● Ø 1-3/8"-6 splines (upper PTO shaft) / UNI 8953-6X26X30 (lower PTO shaft)
Clutch	● Mechanical with dry disc (same transmission plate clutch)

DESCRIPTION	VALUE
Clutch control	● Mechanic
Security	● Interlock on lever (synchronized/independent selection)
<b>REAR LIFTER</b>	
Type	● Lifts and lowers hydraulic
Lifting capacity at the rear arms	● 500 Kg
3-points hitch	● Category 1N
3rd point mechanical arm	● Category 1N
Type of lower arms	● Fixes
Right and left tie rods type	● Adjustable mechanical
<b>HYDRAULIC SYSTEM</b>	
Type	● Open center
Pump flow rate	● 11 litres per minute
Rear hydraulic scv	-
Free oil discharge	-
<b>ELECTRICAL FITTINGS</b>	
Battery	● 12V 360A 44Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
7 pins socket	● 12 Volt
Rear working light	-
Rotating lamp	○ Orange
<b>OPERATING POSITION</b>	
Platform	-
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	-
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
<b>TOWING DEVICES</b>	
Rear tow hook	● Category CEE/CEE-X/CEE-Y adjustable
Front tow hook	● Fix
<b>WEIGHTS</b>	
Front	-
By tyre filled with water	- With air / water valve
Wheel	○ Weights for wheels kg.30X2 set of 2 (tot.60 kg.)
<b>WEIGHTS AND DIMENSIONS</b>	
Wheelbase	● 1000 mm
Lenght (front bumper / rear lifting arms)	● 2500 mm
Width (min-max)	● 467 - 906 mm
Height with ROPS (min-max)	● 1719 - 1757 mm
Height at steering wheel (min-max)	● 1023 mm
Height at seat (min-max)	● 785 mm
Connection angle	● 24°
Ground clearance (min-max)	● 237 mm
Distance between insides of tyres	● 104 - 543 mm
Minimum turning radius (internal)	● 1,25 m
Front track (min-max)	● 314 - 682 mm
Rear track (min-max)	● 328 - 696 mm
Weight with roll-bar	● 750 Kg
Maximum laden mass	● 2800 Kg
<b>WHEELS AND DIMENSIONS ROLL BAR VERSION</b>	

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

## PRICE LIST

# E20 SN STAGE V

Equal-wheel tractors

DESCRIPTION	VALUE
Set of wheels Rear and Front 6.00X16	Minimum width 815 mm; Height • 1757 mm; Ground clearance 237 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



	PART NUMBER	DESCRIPTION	€
<b>VERSIONS</b>			
<b>Trims</b>			
	01130041- 1	E20 SN	€ 16,297
<b>Wheels</b>			
	01800829- 1	Set of wheels Rear and Front 6.00X16	€ 1,143
<b>Towing devices</b>			
	01730349- 1	Rear tow hook category CEE-X D.28	€ 230
	01730350- 1	Rear tow hook category CEE D.31	€ 267
<b>Electrical fittings</b>			
	01900127- 1	Rotating lamp for roll bar	€ 88
<b>Documentation language</b>			
	01700468- 1	Documentation - Italian version	€ 0
	01700469- 1	Documentation - English version	€ 0
	01700470- 1	Documentation - French version	€ 0
	01700471- 1	Documentation - German version	€ 0
	01700472- 1	Documentation - Slovenian version	€ 0
	01700473- 1	Documentation - Croatian version	€ 0
	01700474- 1	Documentation - Polish version	€ 0
	01700475- 1	Documentation - Portuguese version	€ 0
	01700476- 1	Documentation - Spanish version	€ 0

**OPTIONAL**

<b>Weights</b>			
	01800550- 1	Weights for wheels kg.30X2 set of 2 (tot.60 kg.)	€ 421
<b>Accessories</b>			
	01800502- 1	Set 4 distanziali ruota 120mm • Required for track widening	€ 444
	01800566- 1	Wheel spacers 60mm. set of 4 • Required for track widening	€ 396



- + STAGE V**
- + GEARBOX 24+12 SYNCHRONIZED**
- + MAXIMUM LUGGING POWER AND WHEEL GRIP THANKS TO ITS LOW CENTER OF GRAVITY**
- + "LOW PROFILE" VERSION WITH SUPER-LOWERED CAB FROM 180 CM**
- + COMFORTABLE DRIVING: PLATFORM ON "SILENT BLOCKS" WITH VARIABLE VISCOSITY**
- + MORE VERSATILE THAN AN EQUAL-WHEEL TRACTOR, MORE PERFORMANCE-ORIENTED THAN A CRAWLER TRACTOR, EXCELLENT ON THE ROADS**
- + PERFECTLY BALANCED WEIGHTS**

Q is a class of its own and know no rivals on the market. The bodywork with its aggressive and sloping design, the tight turning radius, the big, almost isodiametric driving wheels and the powerful engine make Q the ideal machine for working between the rows of orchards and vineyards with low plants, where there's not much room for manoeuvring, and generally speaking, on heavy soil, sloping and rugged ground. Thanks to the compact bearing structure, which distributes 50% of the weight on the front axle and 50% on the rear one, the center of gravity has been kept low and near to the middle of the machine, while all the traction is fully discharged towards the ground, thus allowing the operator to work in complete safety even with very heavy implements and steeply sloping ground.

## NOTES

**TECHNICAL FEATURES**

● standard | ○ on demand | - not available

DESCRIPTION	VALUE
<b>MODEL</b>	
Type	● Specialized tractor
Structure	● Self supporting integral
Version	● Low
<b>ENGINE</b>	
Trademark	● Doosan
Model	● D24
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 55 KW / 75 HP
Legislation on emission	○ STAGE V
Number of cylinders	● 4
Aspiration	● Intercooler turbocharged
Injection system	● Common Rail direct injection with high pressure pump
Nominal rate	● 2300rpm
Cooling	● On liquid
Swept volume	● 2400 cm3
Specific fuel consumption (maximum torque speed)	● 217 g/KWh
Max torque	● 310Nm@1400giri/min
Torque reserve	● 26%
Tank capacity	● 70 liters
Engine bonnet	● SMC
<b>TRANSMISSION</b>	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● 24+12 synchronized
Gearbox control	● Mechanical with side levers
Clutch	● Dry monodisc, diameter 11"
Clutch control	● Mechanical system through pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Electro-hydraulic
Front axle	● 4-wheel drive engagement on the go
Front wheel drive coupling control	● Electro-hydraulic
Front wheel drive clutch	● Bath oil multiplates
Front differential lock	● NO-SPIN (Automatic)
Front axle swing	● 12°
Minimum speed	● 0,4 Km/h
Maximum speed (homologated)	● 40 Km/h
<b>BRAKES</b>	
Rear braking	● Multiplates oil-bath, hydraulic control
Front braking type	● Synchronized 4-wheel drive in braking
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Hydraulic trailer braking system	○ Hydraulic control acting on main circuit
<b>STEERING WHEEL</b>	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 57°
<b>REAR PTO</b>	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate
Clutch control	● Mechanical with lever

DESCRIPTION	VALUE
Security	● PUSH & START device on PTO selector
<b>FRONT PTO</b>	
Type	○ Independent single shaft
Independent speed from the gearbox	○ 1000 rpm
Rotation way (looking at the pto)	○ Anticlockwise
Version	○ 6 grooves 1-3/8"
Clutch	○ Electro-hydraulic
Clutch control	○ Electric
<b>REAR LIFTER</b>	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 2500 Kg
Electronic Rear Lift	○
3-points hitch	● Category 1 and 2
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	○ Category 1 and 2 / 1 and 2 with fast connection
Type of lower arms	● Telescopic with quick connection
Hydraulic right tie rod	●
<b>FRONT LIFTER</b>	
Type	○ Up and down
Lifting capacity at the rear arms	○ 1200 Kg
3-points hitch	○ Category 1
<b>HYDRAULIC SYSTEM</b>	
Type	● Open center
Pump flow rate	● 38+50 l/min con doppia pompa
Rear hydraulic scv	● N.3 in 1 single block
Optional rear hydraulic SCVs	○ 1 meccanico (con diverter) o 2 elettronici (solo con sollevatore elettronico)
Free oil discharge	● Quick 1/2 NPTF
<b>ELECTRICAL FITTINGS</b>	
Battery	● 12V 850A 95Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	● Orange
<b>OPERATING POSITION</b>	
Platform	● Integral platform
Platform support	● Variable deformation silicone Silent-Block
Front mudguard	● Body integrated
Rear mudguard protection	● Rubber profile
Front mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni Overview
Low profile cab	○ Goldoni LowProfile
Rear-view mirrors, LH and RH side	● Adjustable
Seat	● On spring suspension, with seat belt and OPS
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
<b>STANDARD CAB FITTING OUT</b>	
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper
Front glass	● Openable
Rear glass	● Openable

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

# PRICE LIST

# Q80 STAGE V

Specialized Tractors

DESCRIPTION	VALUE
Front wiper	● 1 speed
Rear wiper	● 1 speed
Front windscreen washer	● 0,5 litres
Rear-view mirror right/left	● Adjustable and lockable
Window shade	● Height adjustable
Rotating lamp set up	● Switch in cab and external bayonet coupling
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	● 2
Rear working light	● 2
Radio set up	● Radio and speakers housing
<b>LOW AND SUPER LOW PROFILE CAB TRIM</b>	
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper
Front glass	● Heat-absorbing fixed
Rear glass	● Openable
Front wiper	● 1 speed
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	-
Rear working light	● 2
Radio set up	-
<b>TOWING DEVICES</b>	
Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable
SLIDER Rear tow hook	○ Category CEE/CEE-X/CEE-Y adjustable, slider type
Front tow hook	● Fix
Draw bar	○ Swinging, category CEE/CEE-X
<b>WEIGHTS</b>	
Front	○ 204Kg 6 pieces 34Kg each
By tyre filled with water	● With air / water valve
<b>WEIGHTS AND DIMENSIONS</b>	
Wheelbase	● 1890 mm
Length with ballast	● 3681 - 3781 mm
Length without ballast	● 3421 - 3521 mm
Width (min-max)	● 1170 - 1878 mm
Height with ROPS (min-max)	● 2170 - 2245 mm
Height with Standard Cab (min-max)	● 2075 - 2150 mm
Height with Super Low Profile cab (min-max)	● 1804 - 1879 mm
Height on grille bonnet (min-max)	● 1134 - 1185 mm
Height at steering wheel (min-max)	● 1204 - 1330 mm
Height at seat (min-max)	● 852 - 1186 mm
Height at rear mudguard (min-max)	● 1075 - 1119 mm
Bonnet height	● 1250 - 1325 mm
Ground clearance (min-max)	● 172 - 247 mm
Distance between insides of tyres	● 716-1115 mm
Minimum turning radius (internal)	○ 2,83 m
Weight with roll-bar	● 2275 Kg
Weight with Standard cab	● 2425 Kg
Weight with super low profile cab	● 2540 Kg
<b>WHEELS AND DIMENSIONS ROLL BAR VERSION</b>	
Set of wheels Rear 340/65R20 Front 280/70R16	Min. width 1447mm; Height ● 2170mm; Ground clearance 172mm
Set of wheels Rear 360/70R20 Front 280/70R18	Min. width 1464mm; Height ● 2220mm; Ground clearance 222mm
Set of wheels Rear 420/65R20 Front 320/65R18	Min. width 1552mm; Height ● 2220mm; Ground clearance 222mm

DESCRIPTION	VALUE
<b>STANDARD CAB VERSION TYRES AND DIMENSION</b>	
Set of wheels Rear 340/65R20 Front 280/70R16	Min. width 1447mm; Height ● 2039mm; Ground clearance 172mm
Set of wheels Rear 360/70R20 Front 280/70R18	Min. width 1464mm; Height ● 2089mm; Ground clearance 222mm
Set of wheels Rear 420/65R20 Front 320/65R18	Min. width 1552mm; Height ● 2089mm; Ground clearance 222mm
<b>SUPER LOW PROFILE CAB VERSION TYRES AND DIMENSIONS</b>	
Set of wheels Rear 340/65R20 Front 280/70R16	Min. width 1447mm; Height ● 1804mm; Ground clearance 172mm
Set of wheels Rear 360/70R20 Front 280/70R18	Min. width 1464mm; Height ● 1854mm; Ground clearance 222mm
Set of wheels Rear 420/65R20 Front 320/65R18	Min. width 1552mm; Height ● 1854mm; Ground clearance 222mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
<b>VERSIONS</b>			
<b>Trims</b>			
	01093456- 1	Q80 - Roll-bar	€ 57,913
	01093451- 1	Q80 - Standard cab	€ 67,563
	01093449- 1	•	
	01093463- 1	Q80 - Low Profile cab	€ 68,872
	01093460- 1	•	
<b>Wheels</b>			
	01800856- 1	Set of wheels Rear 340/65R20 Front 280/70R16	€ 3,267
	01800577- 1	Set of wheels Rear 360/70R20 Front 280/70R18	€ 3,766
	01800904- 1	Set of wheels Rear 420/65R20 Front 320/65R18	€ 4,148
<b>Towing devices</b>			
	01730509- 1	Rear tow hook category CEE-X D.28	€ 275
	01730510- 1	Rear tow hook category CEE-X D.28, SLIDER type • Tow hook guides demanded	€ 320
	01730511- 1	Rear tow hook category CEE D.31	€ 396
	01730512- 1	Rear tow hook category CEE D.31, SLIDER type • Tow hook guides demanded	€ 396
	01730516- 1	Rear tow hook category CEE-Y D.43 • Mandatory with Hydraulic Trailer Brake	€ 435
	01730517- 1	Rear tow hook category CEE-Y D.43, SLIDER type • Tow hook guides demanded • Mandatory with Hydraulic Trailer Brake	€ 435
	01730513- 1	Swinging drawbar cat. CEE-D31	€ 472
	01730514- 1	Swinging drawbar category CEE-X D.28	€ 472
	01730515- 1	Sliding tow hook guides, SLIDER type	€ 320
<b>Documentation language</b>			
	01700310- 1	Documentation - Italian version	€ 0
	01700311- 1	Documentation - English version	€ 0
	01700312- 1	Documentation - French version	€ 0
	01700313- 1	Documentation - German version	€ 0
	01700314- 1	Documentation - Spanish version	€ 0
	01700330- 1	Documentation - Portuguese version	€ 0
	01700331- 1	Documentation - Slovenian version	€ 0
	01700332- 1	Documentation - Croatian version	€ 0
	01700415- 1	Documentation - Czech version	€ 0
	01700413- 1	Documentation - Greek version	€ 0
	01700416- 1	Documentation - Polish version	€ 0
	01700414- 1	Documentation - Hebrew version	€ 0
	01700464- 1	Documentation - Hungarian version	€ 0
	01700535- 1	Documentation - Romanian version	€ 0
<b>OPTIONAL</b>			
<b>Lifters</b>			

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
	01640313- 1	Front up and down lifter <ul style="list-style-type: none"> <li>01640313</li> <li>For rear SCV</li> <li>Including pair of front lift arms, cat. 1</li> <li>Front PTO Mandatory</li> </ul>	€ 3,191
	01640315- 1	Hydraulic registration for the rear arm 3rd point, 1-2 category <ul style="list-style-type: none"> <li>01640315</li> <li>Diverter required with mechanical rear lift</li> </ul>	€ 536
	01640316- 1	Hydraulic registration for the 3rd point rear arm, with quick connection <ul style="list-style-type: none"> <li>Diverter required with mechanical rear lift</li> <li>01640316</li> </ul>	€ 703
<b>Power take off</b>			
	01950078- 1	Front power take off 1000 rpm <ul style="list-style-type: none"> <li>01950078</li> </ul>	€ 4,276
<b>Diverter</b>			
	01640317- 1	Diverter on STD/DE <ul style="list-style-type: none"> <li>01640317</li> <li>For mechanical lift</li> </ul>	€ 447
<b>Weights</b>			
	01800882- 1	Front weight set kg.34x6(tot. 204Kg)	€ 963
<b>Hydraulic trailer braking system</b>			
	01640324- 1 01640375- 1	Hydraulic trailer braking system CUNA type (Italy) <ul style="list-style-type: none"> <li>For Italy only</li> <li>01640375</li> </ul>	€ 1,354
	01640324- 1 01640376- 1	Hydraulic trailer braking system MOTHER REGULATION type <ul style="list-style-type: none"> <li>01640376</li> </ul>	€ 1,953
<b>Electrical fittings</b>			
	01900134- 1	Adjustable rear worklight <ul style="list-style-type: none"> <li>01900134</li> <li>Not available on cab versions</li> </ul>	€ 127
	01900135- 1	Rotating lamp for roll bar <ul style="list-style-type: none"> <li>Mandatory</li> </ul>	€ 88
	01900136- 1	Rotating lamp for standard cab <ul style="list-style-type: none"> <li>Mandatory</li> </ul>	€ 88
	01900137- 1	Rotating lamp for Low Profile cab <ul style="list-style-type: none"> <li>Mandatory</li> </ul>	€ 88



- ⊕ 48 HP ENGINE
- ⊕ 12+12 GEARBOX WITH FAST RELEASE  
(ADDITIONAL 4 FAST REV SPEEDS)
- ⊕ ITALIAN STYLE
- ⊕ MULTIFUNCTIONAL

C50 is the range designed by Goldoni for a wide variety of specialistic uses: work in the open fields, between the rows of vineyards and orchards, in greenhouses and nurseries as well as all the many transport jobs required in farms and for professional ground care. C50 is the answer for those who need a versatile, multifunction machine that possesses all the strong points of a Goldoni tractor: compact size, sturdiness and reliability.

**NOTES**

**TECHNICAL FEATURES**

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
<b>MODEL</b>	
Type	● Compact tractor
Structure	● <b>Self supporting integral</b>
<b>ENGINE</b>	
Trademark	● Doosan
Model	● D18
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 40 KW/55 hp
Legislation on emission	● STAGE V
Number of cylinders	● 3
Aspiration	● Turbocharged
Nominal rate	● 2600 rev/min
Cooling	● On liquid
Swept volume	● 1800 cm3
Specific fuel consumption (maximum torque speed)	● 260 g/KWh
Max torque	● 150Nm @ 1600giri/minuto
Torque reserve	● 15%
Tank capacity	● 45 litres
Engine bonnet	● VTR (Reinforced plastic with glass)
<b>TRANSMISSION</b>	
Type transmission	● Mechanical drive, four-wheel drive
Type gearbox	● <b>12+12+4 Fast Reverse</b>
Gearbox control	● Mechanical with front lever
Clutch	● Dry Single-disc, diameter 9"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Mechanic
Front axle	● Four wheel drive
Front wheel drive coupling control	● Mechanic
Front axle swing	● 11°
Minimum speed	● 0,7 Km/h
Maximum speed (homologated)	● 30 Km/h
<b>BRAKES</b>	
Rear braking	● Multiplates bath oil, mechanical control
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
Trailer brake mechanical lever support	● CUNA type
<b>STEERING WHEEL</b>	
Steering wheel system	● Hydrostatic
Steering angle	● 55°
<b>REAR PTO</b>	
Type	● Twin shaft, synchronized and independent
Independent speed from the gearbox	● 540/1000 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate
Clutch control	● Mechanic
Security	● PUSH & START device on PTO selector
<b>FRONT PTO</b>	
Type	○ Independent single shaft
Independent speed from the gearbox	○ 1000 rpm
Rotation way (looking at the pto)	○ Anticlockwise

DESCRIPTION	VALUE
Version	○ 6 grooves 1-3/8"
Clutch	○ Electromagnetic
Clutch control	○ Electric
<b>REAR LIFTER</b>	
Type	● Lifts and lowers hydraulic
Lifting capacity at the rear arms	● 1800 Kg
3-points hitch	● Category 1
3rd point mechanical arm	● Category 1
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
<b>FRONT LIFTER</b>	
Type	○ Lifts and lowers hydraulic
Lifting capacity at the rear arms	○ 350 Kg
3-points hitch	○ Category 1N
3rd point mechanical arm	○ Category 1N
<b>UNDER BELLY LIFTER</b>	
Type	○ Floating and double acting
<b>HYDRAULIC SYSTEM</b>	
Type	● Open center
Pump flow rate	● 33 litres per minutes
Rear hydraulic scv	● N.2 in a monoblock double acting with recovery
Front hydraulic scv	○ Monobloc with 3 points front scv
Free oil discharge	● Quick 1/2 NPTF
<b>ELECTRICAL FITTINGS</b>	
Battery	● 12V 500A 60Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	○ Orange
<b>OPERATING POSITION</b>	
Platform	● Integral platform
Platform support	● Variable deformation silicone ● Silent-Block
Rear mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni Overview GL12 Full Glass with A/C
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
<b>STANDARD CAB FITTING OUT</b>	
ROPS homologation	● Goldoni Overview GL12 Full Glass
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper
Air filter cab treatment-repellent	○ Active charcoal
Front glass	● Openable
Rear glass	● Openable
Front wiper	● 1 speed
Rear wiper	● 1 speed
Front windscreen washer	● 0,5 litres
Rear-view mirror right/left	● Adjustable and lockable
Window shade	● Height adjustable
Rotating lamp set up	● Switch in cab and external bayonet coupling

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes



# PRICE LIST

# C50 STAGE V

Specialized Tractors

DESCRIPTION	VALUE
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	● 2
Rear working light	● 2
Radio set up	● Radio and speakers housing
<b>TOWING DEVICES</b>	
Rear tow hook	○ Categoria X/Y (ex C/D2)
Front tow hook	● Fix
<b>WEIGHTS</b>	
Front	○ 75Kg in 5 pieces 15Kg each
By tyre filled with water	● With air / water valve
<b>WEIGHTS AND DIMENSIONS</b>	
<b>Wheelbase</b>	● 1723 mm
Length (front bumper / rear lifting arms)	● 2949 mm
Length with ballast	● 3126 mm
Width (min-max)	● 1090 - 1500 mm
Height with ROPS (min-max)	● 1885-1940 mm
Height with Standard Cab (min-max)	○ 2090-2180 mm
Height on grille bonnet (min-max)	● 1033 - 1039 mm
Height at steering wheel (min-max)	● 1348 - 1374 mm
Height at seat (min-max)	● 1075 - 1187 mm
Height at rear mudguard (min-max)	● 1208 - 1240 mm
Ground clearance (min-max)	● 296 - 316 mm
Distance between insides of tyres	● 650 - 751 mm
Minimum turning radius (internal)	● 2,3 m
Front track (min-max)	● 900 - 1216 mm
Rear track (min-max)	● 834 - 1200 mm
Weight with roll-bar	● 1475 Kg
Weight with Standard cab	○ 1645 kg
Maximum laden mass	● 2500 Kg
Maximum towable weight (without braking), with roll bar	● 1475 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 4425 mm
Maximum towable weight (without braking), with standard cab	● 1645 kg
Maximum towable mass (with mechanical braking system), with standard cab	● 4935 kg
<b>WHEELS AND DIMENSIONS ROLL BAR VERSION</b>	
Set of wheels Rear 8.3-24 Front 200/70R16	Min. width 1098 mm; Height ○ 1948 mm; Ground clearance 302 mm
Set of wheels Rear 360/70R20 Front 11.0/65R12	Minimum width 1340 mm; ○ Height 1959 mm; Ground clearance 316 mm
Set of wheels Rear 38/14x20 Front 27/8.5R15	Minimum width 1363 mm; ○ Height 1933 mm; Ground clearance 296 mm
Set of wheels Rear 280/85R20 Front 200/70R16	Minimum width 1223 mm; ○ Height 1940 mm; Ground clearance 302 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
<b>VERSIONS</b>			
<b>Trims</b>			
	01560359- 1 01640995- 1	C50 - Roll-bar <ul style="list-style-type: none"> <li>• With draft control</li> <li>• Complete with rear lift arms</li> </ul>	€ 30,988
	01560353- 1 01641063- 1	C50 - Roll-bar <ul style="list-style-type: none"> <li>• Complete with rear lift arms</li> </ul>	€ 29,967
	01560355- 1 01641063- 1	C50 - Roll-bar - Front Lift & PTO <ul style="list-style-type: none"> <li>• Complete with rear lift arms</li> </ul>	€ 36,092
	01560356- 1 01641063- 1	C50 - Standard Cab <ul style="list-style-type: none"> <li>• Complete with rear lift arms</li> </ul>	€ 39,960
	01560362- 1 01640995- 1	C50 - Standard Cab <ul style="list-style-type: none"> <li>• With draft control</li> <li>• Complete with rear lift arms</li> </ul>	€ 40,981
	01560358- 1 01641063- 1	C50 - Standard cab - Front PTO and front lifter <ul style="list-style-type: none"> <li>• Complete with rear lift arms</li> </ul>	€ 46,087
<b>Wheels</b>			
	01800833- 1	Set of wheels Rear 280/85R20 Front 200/70R16	€ 3,038
	01800818- 1	Set of wheels Rear 360/70X20 Front 11.0/65X12	€ 3,305
	01800711- 1	Set of wheels Rear 320/70R24 Front 240/70R16	€ 3,127
	01800858- 1	Set of wheels Rear 8.3-24 Front 200/70R16	€ 3,031
	01800596- 1	Set of wheels Rear 38/14.00X20 Front 27/8.50X15 garden	€ 4,223
<b>Towing devices</b>			
	01730349- 1	Rear tow hook category CEE-X D.28	€ 230
	01730350- 1	Rear tow hook category CEE D.31	€ 267
<b>Documentation language</b>			
	01700495- 1	Documentation - Italian version	€ 0
	01700499- 1	Documentation - English version	€ 0
	01700496- 1	Documentation - Spanish version	€ 0
	01700497- 1	Documentation - French version	€ 0
	01700498- 1	Documentation - German version	€ 0
	01700500- 1	Documentation - Portuguese version	€ 0
	01700501- 1	Documentation - Slovenian version	€ 0
	01700502- 1	Documentation - Croatian version	€ 0
	01700503- 1	Documentation - Czech version	€ 0
	01700504- 1	Documentation - Polish version	€ 0
	01700505- 1	Documentation - Hungarian version	€ 0
	01700506- 1	Documentation - Greek version	€ 0
<b>OPTIONAL</b>			
<b>Front hydraulic scv</b>			
	01640346- 1	Monobloc with 3 points front scv	€ 766
<b>Weights</b>			
	01800846- 1	Front weight set of 5x15 kg. (tot.75 kg.)	€ 396
<b>Electrical fittings</b>			
	01640347- 1	High beams KIT	€ 313
	01900128- 1	Rear working light	€ 127

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
	01900127- 1	Rotating lamp for roll bar	€ 88
	01900113- 1	Rotating lamp for cab	€ 88
<b>Varie</b>			
	01641080- 1	KIT Telecamera Posteriore CAB GL	€ 457
<b>Farming pack 4.0</b>			
	01641076- 1	KIT Agricoltura 4.0 C50 Rops	€ 7,819
	01641072- 1	KIT Agricoltura 4.0 CAB GL	€ 7,819



- +** SHORT WHEELBASE
- +** EXCLUSIVE PATENTED GEARBOX WITH "DUAL POWER" SYSTEM
- +** COMFORTABLE DRIVING: PLATFORM ON "SILENT BLOCKS" AND "OVERVIEW" CAB WITH A/C
- +** EXCELLENT WEIGHT/POWER RATIO AND BALANCED WEIGHTS
- +** TYPE-APPROVED FOR 40 KM/H

Goldoni S series is the optimal answer to the needs of professional users who work in vineyards and orchards: powerful and easily handled, reliable and able to provide an excellent performance, these tractors are the ideal partners when it comes to working in the often difficult conditions in which specialized crops are cultivated. One of the salient features of the S series is its compact size.

**NOTES**

**TECHNICAL FEATURES**

● standard | ○ on demand | — not available

DESCRIPTION	VALUE
<b>MODEL</b>	
Type	● Specialized tractor
<b>Structure</b>	● <b>Self supporting integral</b>
Version	● Low
<b>ENGINE</b>	
Trademark	● Doosan
Model	● D24
Fuel supply	● Direct injection diesel
Rated power (ECE R120)	● 55 KW / 75 HP
Legislation on emission	● STAGE V
Number of cylinders	● 4
Aspiration	● Turbocharged
Nominal rate	● 2300rpm
Cooling	● On liquid
Swept volume	● 2400 cm3
Specific fuel consumption (maximum torque speed)	● 238 g/KWh
Max torque	● 310Nm@1400giri/min
Torque reserve	● 26%
Tank capacity	● 50 litres
Engine bonnet	● RTM
<b>TRANSMISSION</b>	
Type transmission	● Mechanical drive, four-wheel drive
<b>Type gearbox</b>	● <b>24+12 synchronized</b>
Gearbox control	● Mechanical with side levers
Clutch	● Dry single-disc, diameter 10"
Clutch control	● Mechanical system through pedal
Security	● PUSH & START device on the clutch pedal
Type reverser	● Mechanical, synchronized
Reverse control	● Lever
Rear differential lock	● Mechanic
Front axle	● 4-wheel drive engagement on the go
Front wheel drive coupling control	● Electro-hydraulic
Front wheel drive clutch	● Bath oil multiplates
Front differential lock	● NO-SPIN (Automatic)
Front axle swing	● 11°
Minimum speed	● 1,0 Km/h
Maximum speed (homologated)	● 40 Km/h
<b>BRAKES</b>	
Rear braking	● Multiplates bath oil, mechanical control
<b>Front braking type</b>	● <b>Synchronized 4-wheel drive in braking</b>
Secondary and parking brake	● Acting on rear wheels, by independent mechanical control
<b>STEERING WHEEL</b>	
Steering wheel system	● Hydrostatic with Load Sensing valve
Steering angle	● 55°
<b>REAR PTO</b>	
Type	● Single shaft, synchronized and independent
Independent speed from the gearbox	● 540/750 rpm
Synchronized speed to the gearbox	● Yes
Rotation way (looking at the pto)	● Clockwise
Version	● 6 grooves 1-3/8"
Clutch	● Independent, mechanical with dry plate
Clutch control	● Mechanic
Security	● PUSH & START device on clutch pedal and PTO

DESCRIPTION	VALUE
<b>FRONT PTO</b>	
Type	○ Independent single shaft
Independent speed from the gearbox	○ 1000 rpm
Rotation way (looking at the pto)	○ Anticlockwise
Version	○ 6 grooves 1-3/8"
Clutch	○ Electro-hydraulic
Clutch control	○ Electric
<b>REAR LIFTER</b>	
Type	● Hydraulic with positioning and power control
Lifting capacity at the rear arms	● 2300 Kg
3-points hitch	● Category 1 and 2
3rd point mechanical arm	● Category 1 and 2
Hydraulic 3rd point arm	—
Type of lower arms	● Fixes
Type of right tie rod	● Mechanic
<b>FRONT LIFTER</b>	
Type	○ Up and down
Lifting capacity at the rear arms	● 1000 Kg
3-points hitch	○ 1 and 1N category
<b>HYDRAULIC SYSTEM</b>	
Type	● Open center
Pump flow rate	● 43 litres/minute
First rear hydraulic scv	● Switching to single and double acting valve
Second rear hydraulic scv	● Double acting
Third rear hydraulic scv	○ Single acting with coupling in floating position; or double acting with coupling levers; or double acting with recovery; or double acting with 4th floating position
Front hydraulic scv	○ Maximum 3, single/double acting
Free oil discharge	● Quick 1/2 NPTF
<b>ELECTRICAL FITTINGS</b>	
Battery	● 12V 850A 95Ah
Security	● Battery disconnection
Instrument	● Digital / analogic
1 pin socket	● 12 Volt
7 pins socket	● 12 Volt
Rear working light	○ Adjustable
Rotating lamp	○ Orange
<b>OPERATING POSITION</b>	
Platform	● Integral platform
Platform support	● Silent-block
Front mudguard	● Independent, swivelling, rubber made
Rear mudguard protection	● Rubber profile
Roll-bar	● Central, all-tilting
Standard cab	○ Goldoni Overview GL9
Left rearview mirror	● Adjustable
Seat	● On spring suspension, with seat belt and OPS
Seat adjustment	● Horizontal, vertical, driver weight
Tool box	● Yes
Use and maintenance manual	● Yes
<b>STANDARD CAB FITTING OUT</b>	
ROPS homologation	● GL9 type
Side doors	● With bar, gas spring, key closing
Cab air filter dust-repellent	● Paper
Air filter cab treatment-repellent	○ Active charcoal
Front glass	● Openable

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

## PRICE LIST

# S80 STAGE V

Specialized Tractors

DESCRIPTION	VALUE
Rear glass	● Openable
Front wiper	● 1 speed
Rear wiper	● 1 speed
Front windscreen washer	● 0,5 litres
Rear-view mirror right/left	● Adjustable and lockable
Window shade	● Height adjustable
Rotating lamp set up	● Switch in cab and external bayonet coupling
Heating and ventilation system	● Electro-ventilated
Air conditioning	● Fan-electric condenser on the cab roof
Front working light	● 2
Rear working light	● 2
Radio set up	● Radio and speakers housing
<b>TOWING DEVICES</b>	
Rear tow hook	○ C/CEE Category 7 heights adjustable
Front tow hook	● Fix
Draw bar	○ Swinging CEE-BT1 Category (2 heights available)
<b>WEIGHTS</b>	
Front	○ 100Kg 5 pcs 20 kg.each
By tyre filled with water	● With air / water valve
<b>WEIGHTS AND DIMENSIONS</b>	
<b>Wheelbase</b>	● <b>1890 mm</b>
Width (min-max)	● 1364-1794 mm
Height with ROPS (min-max)	● 2010 - 2056 mm
Height with Standard Cab (min-max)	○ 2131 - 2169 mm
Height on grille bonnet (min-max)	● 1106 - 1143 mm
Height at steering wheel (min-max)	● 1275 - 1350 mm
Height at seat (min-max)	● 1125 - 1134 mm
Height at rear mudguard (min-max)	● 1120 - 1175 mm
Ground clearance (min-max)	● 212 - 267 mm
Distance between insides of tyres	● 654 - 1109 mm
Minimum turning radius (internal)	● 2,90 m
Weight with roll-bar	● 1930 Kg
Weight with Standard cab	○ 2070 Kg
Maximum laden mass	● 3050 Kg
Maximum towable weight (without braking), with roll bar	● 1940 Kg
Maximum towable mass (with mechanical braking system), with roll bar	● 5000 Kg
Maximum towable weight (without braking), with standard cab	○ 2070 Kg
Maximum towable mass (with mechanical braking system), with standard cab	● 5000 Kg
<b>WHEELS AND DIMENSIONS ROLL BAR VERSION</b>	
Set of wheels Rear 360/70R20 Front 11.0/65R12	Minimum width 1464 mm; ○ Height 2131 mm; Ground clearance 212 mm
Set of wheels Rear 320/70R24 Front 240/70R16	Minimum width 1364 mm; ○ Height 2135 mm; Ground clearance 248 mm
Set of wheels Rear 360/70R24 Front 260/70R16	Minimum width 1464 mm; ○ Height 2148 mm; Ground clearance 267 mm
<b>STANDARD CAB VERSION TYRES AND DIMENSION</b>	
Set of wheels Rear 320/70R24 Front 240/70R16	Minimum width 1364 mm; ○ Height 2150 mm; Ground clearance 248 mm
Set of wheels Rear 360/70R20 Front 11.0/65R12	Minimum width 1464 mm; ○ Height 2131 mm; Ground clearance 212 mm

DESCRIPTION	VALUE
Set of wheels Rear 360/70R24 Front 260/70R16	Minimum width 1464 mm; ○ Height 2148 mm; Ground clearance 267 mm

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
<b>VERSIONS</b>			
<b>Trims</b>			
	01091398- 1 01640847- 1	S80 - Roll-bar <ul style="list-style-type: none"> <li>• Complete with rear lift arms</li> </ul>	€ 48,578
	01091411- 1 01640847- 1	S80 Standard cab <ul style="list-style-type: none"> <li>• Complete with rear lift arms</li> <li>• Requires third rear hydraulic SCV, DE with double coupling lever in floating position</li> </ul>	€ 57,815
<b>Wheels</b>			
	01800861- 1	Set of wheels Rear 320/70R24 Front 240/70R16	€ 3,127
	01800768- 1	Set of wheels Rear 360/70R24 Front 260/70R16	€ 3,638
	01800824- 1	Set of wheels Rear 360/70X20 Front 11.0/65X12	€ 3,331
	01800853- 1	Set of wheels Rear 41X14.00-20 Front 27X10.50-15 garden	€ 5,233
<b>Towing devices</b>			
	01730351- 1	Rear tow hook category CEE-X D.28	€ 230
	01730352- 1	Rear tow hook category CEE D.31	€ 267
	01730354- 1	Swinging drawbar category CEE-X D.28	€ 466
	01730353- 1	Swinging drawbar cat. CEE-D31	€ 466
<b>Documentation language</b>			
	01700385- 1	Documentation - Italian version	€ 0
	01700386- 1	Documentation - English version	€ 0
	01700387- 1	Documentation - French version	€ 0
	01700388- 1	Documentation - German version	€ 0
	01700389- 1	Documentation - Spanish version	€ 0
	01700390- 1	Documentation - Portuguese version	€ 0
	01700391- 1	Documentation - Slovenian version	€ 0
	01700392- 1	Documentation - Croatian version	€ 0
	01700393- 1	Documentation - Polish version	€ 0
	01700460- 1	Documentation - Greek version	€ 0
	01700461- 1	Documentation - Hungarian version	€ 0
<b>OPTIONAL</b>			
<b>Lifters</b>			
	01640269- 1	Pair of stabilizers for rear lifter arms	€ 267
<b>Power take off</b>			
	01950069- 1	Front power take off 1000 rpm	€ 3,683
<b>Lifters</b>			
	01640741- 1 01640901- 1	Front up and down lifter <ul style="list-style-type: none"> <li>• SCV and his connecting flange included</li> <li>• Pair of front lifter arms, category 1</li> </ul>	€ 2,565
<b>Rear hydraulic scv</b>			
	01640331- 1	3rd rear hydraulic SCV, simple effect with coupling lever in floating position	€ 478
	01640332- 1	3rd rear hydraulic SCV, double effect with coupling lever	€ 511
	01640333- 1	3rd rear hydraulic SCV, double effect with recovery	€ 478
	01640334- 1	3rd rear hydraulic SCV, double effect with double coupling lever in floating position	€ 511

●All prices are VAT excl. ●Prices do not include taxes of any kind (local or national) and do not include packaging. ●Terms of delivery: ex works (transport costs are not included) ●The illustrations, descriptions and specifications in this publication are purely indicative and are of no value for contractual purposes

	PART NUMBER	DESCRIPTION	€
<b>Front hydraulic scv</b>			
	01640377- 1	Set up kit for front scv assembling	€ 511
	01640882- 1	Front hydraulic scv, simple effect with coupling lever in floating position	€ 478
	01640883- 1	Front hydraulic scv, double effect	€ 485
	01640884- 1	Front hydraulic scv, double effect with double coupling lever	€ 492
	01640885- 1	Front hydraulic scv, double effect with coupling lever and 4th floating position	€ 497
<b>Hydraulic trailer braking system</b>			
<b>Weights</b>			
	01800663- 1	Front weight set of 5x20 Kg (tot.100 kg.)	€ 523
<b>Electrical fittings</b>			
	01900135- 1	Rotating lamp for roll bar • Mandatory	€ 88
	01900136- 1	Rotating lamp for standard cab • Mandatory	€ 88
	01900092- 1	Rear working light • Adjustable	€ 127
<b>Front mudguard</b>			
	01810013- 1	Pair of front mudguard	€ 523
<b>Varie</b>			
	01641080- 1	KIT Telecamera Posteriore CAB GL	€ 457
<b>Farming pack 4.0</b>			
	01641075- 1	KIT Agricoltura 4.0 S80 Rops	€ 7,819
	01641072- 1	KIT Agricoltura 4.0 CAB GL	€ 7,819